


NOTES:

1. SUBSTRATE:
PMMA, PERMANENTLY LAMINATED TO PET FILM WITH HARD MICROSTRUCTURED POLYMER COATING
2. TYPE OF DIFFUSER: High Efficiency Diffuser
3. DIFFUSING ANGLE (°): 80
4. OPERATING TEMPERATURE (°C): -34 to +70

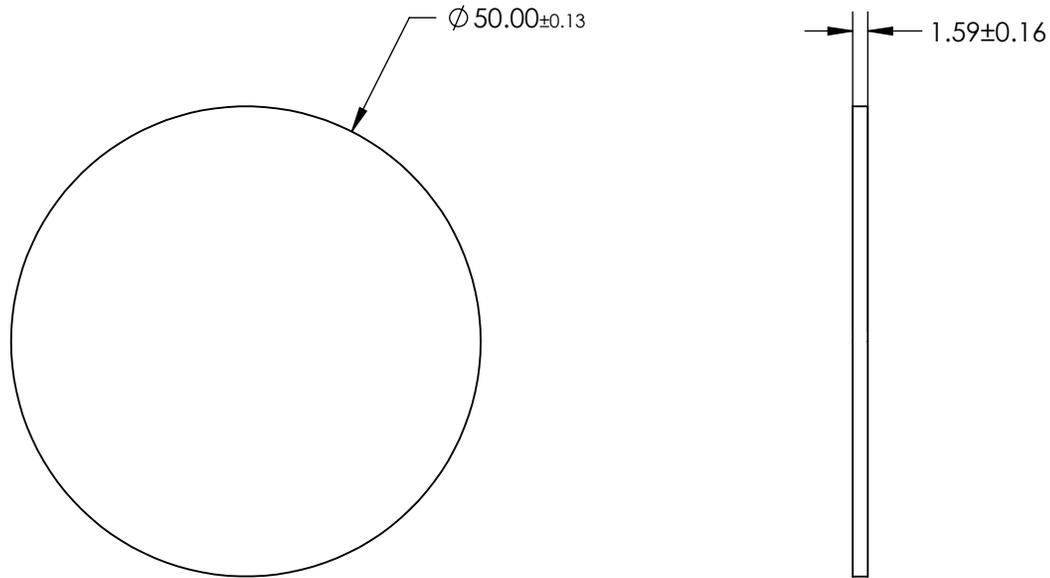

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

EO® **Edmund Optics**®

THIRD ANGLE PROJECTION 		TITLE	50mm Dia., 80° Diffusion Angle, High Efficiency Diffuser	
ALL DIMS IN	mm	DWG NO	70768	SHEET 2 OF 11