


NOTES:



1. SUBSTRATE:  
ZERODUR®
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO <3 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1: Enhanced Aluminum (450-650nm)  
R(avg) >95% @ 450 - 650nm
- S2: NONE



4.  ARROW ON EDGE POINTING TOWARD SURFACE S1

5.  FINE GRIND SURFACE


6. ROHS COMPLIANT

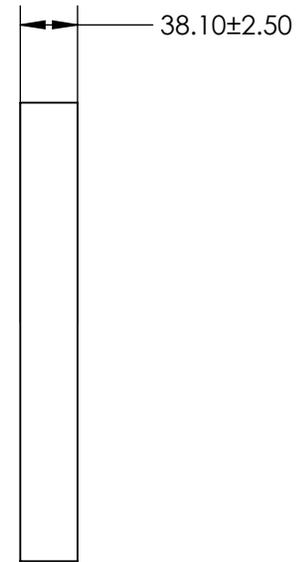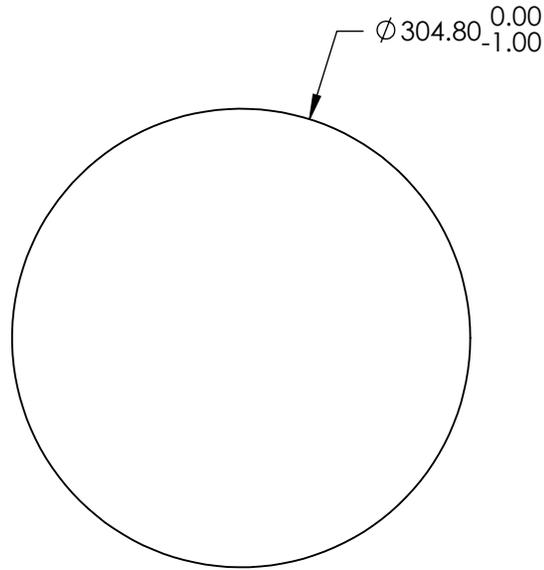

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE FLATNESS	$\lambda/20$	N/A
SURFACE QUALITY	60-40	COMMERCIAL POLISH
CLEAR APERTURE	$\varnothing 274.30$	$\varnothing 274.30$
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN

mm

 **Edmund Optics®**

TITLE

12" Dia. Enhanced Aluminum,  $\lambda/20$  Flat  
ZERODUR®

DWG NO

71111533

SHEET  
18 OF 20