

NOTES:




1. SUBSTRATE: FLOAT GLASS

3. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: BBAR (425-700nm)  
R(AVG) ≤0.5% @ 425 - 700nm

3. FINE GRIND SURFACE

4. ROHS COMPLIANT

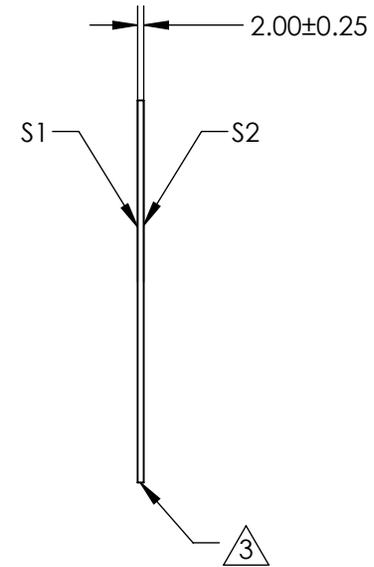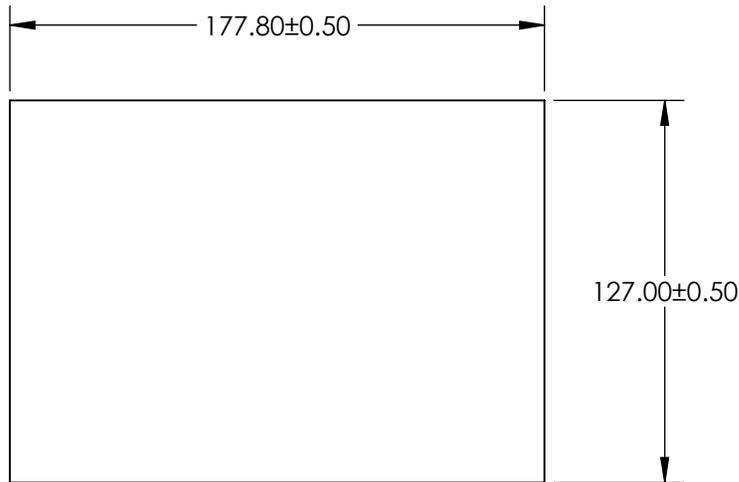

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	80 - 50	80 - 50
CLEAR APERTURE	114.30 x 160.02	114.30 x 160.02
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED



ALL DIMS IN mm

**EO**® Edmund Optics®

TITLE

127 x 177.8 x 2mm High Efficiency Window

DWG NO

71600

SHEET  
4 OF 4