

[See all 76 Products in Family](#)

LightPath 354064 | 6mm Dia., 0.24 NA, BBAR (1050-1600nm), Molded Aspheric Lens

See More by [Lightpath®](#)



Precision Molded Aspheric Lenses

Stock **#37-111** **20+ In Stock**

1 MRP ₹7,567

i Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-10	₹7,567 each
Qty 11-49	₹6,810 each
Need More?	Request Quote

Product Downloads

General

Thickness: 0.25 (t) (mm)
Material: BK7

Compatible Window:

354064

Lightpath Lens Code:

Aspheric Lens

Type:

Collimate or Focus Laser Light **Typical Applications:**

Physical & Mechanical Properties

6.00 ±0.015 **Diameter (mm):**

5.2 **Clear Aperture CA (mm):**

2.59 **Edge Thickness ET (mm):**

3.10 ±0.05 **Center Thickness CT (mm):**

Protective as needed **Bevel:**

8.706 **Distance from Window to Lens (D) (mm):**

Optical Properties

11.00 @633nm **Effective Focal Length EFL (mm):**

0.24 **Numerical Aperture NA:**

D-ZK3 **Substrate:** □

±1 **Focal Length Tolerance (%):**

633 **Aspheric Design Wavelength (nm):**

BBAR (1050-1600nm) **Coating:**

Coating Specification:
R_{abs} <1.0% @ 1050 - 1600nm

80-50 **Surface Quality:**

2.50 **f#:**

50.22 **Abbe Number (v_d):**

1.586 **Index of Refraction (n_d):**

1050 - 1600 **Wavelength Range (nm):**

9.3 **Working Distance (mm):**

Infinite **Conjugate Distance:**

633.00 **Focal Length Specification Wavelength (nm):**

< 0.09 **Transmitted Wavefront Error (λ, RMS):**

Material Properties

7.6 **Coefficient of Thermal Expansion CTE (10⁻⁶/°C):**

Environmental & Durability Factors

≤200 **Operating Temperature (°C):**

Regulatory Compliance

Compliant **RoHS 2015:**

View **Certificate of Conformance:**

Compliant **Reach 247:**

China **Country of Origin:**

Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91- 80-6845 0000


Product Details

- Eliminate Spherical Aberration
- Multiple Coating Options Available
- Range of Numerical Apertures

LightPath® Geltech™ Molded Aspheric Lenses are used to eliminate spherical aberration and improve focusing and collimating accuracy in a variety of laser applications. Low NA aspheric lenses are designed to maintain beam shape, while high NA lenses gather all available light to maintain beam power over long distances. LightPath® Geltech™ Molded Aspheric Lenses are ideal for applications including sighting systems, bar code scanners, laser diode-to-fiber coupling, optical data storage, or biomedical lasers.



Technical Information

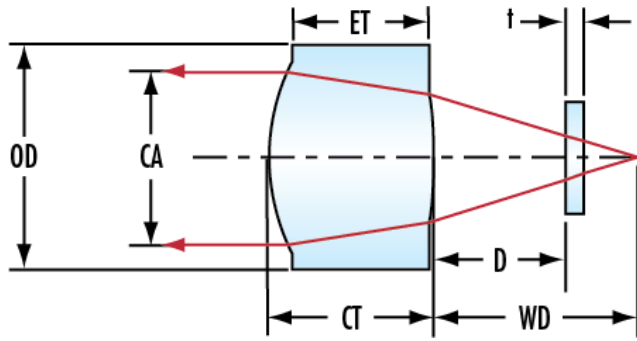

Compatible Mounts