

[See all 33 Products in Family](#)

**TECHSPEC® 0.9 OD 12.5mm Dia UV-NIR ND Filter**



UV-NIR Neutral Density Filters

Stock **#19-301** **20+ In Stock**

⊖ 1 ⊕ ₹10,198

**ADD TO CART**

Volume Pricing	
Qty 1-5	₹10,198 each
Qty 6-25	₹9,186 each
Qty 26-49	₹8,719 each
Need More?	<a href="#">Request Quote</a>

Product Downloads

**General**

Neutral Density Filter **Type:**

**Physical & Mechanical Properties**

12.50 +0.0/-0.2 **Diameter (mm):**

1.50 ±0.10 **Thickness (mm):**

80.00 Clear Aperture (%):

<5 Parallelism (arcsec):

## Optical Properties

0.9 Optical Density OD (Average):

Fused Silica (Corning 7980) Substrate:

Metallic Based ND Coating:

40-20 Surface Quality:

12.5 Transmission (%):

190 - 1700 Blocking Wavelength Range (nm):

$\lambda/4$  Transmitted Wavefront, P-V:

$\pm 10$  Optical Density Tolerance (%):

## Regulatory Compliance

Compliant RoHS 2015:

View Certificate of Conformance:

Compliant REACH 241:

United States Country of Origin:

Edmund Optics India Private Limited Imported By:

## Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).


## Product Details

- Constant Transmission from 190 – 1700nm
- Can be Stacked to Create Intermediate Density Values
- Multiple Optical Densities Available

TECHSPEC® UV-NIR Neutral Density (ND) Filters are used to attenuate light from the ultraviolet to the near-infrared. TECHSPEC® UV-NIR ND Filters feature excellent parallelism with superior surface characteristics to provide constant, ultra-broadband performance from 190 – 1700nm. These ND filters are ideal for a range of applications including spectroscopy, machine vision, or ellipsometry, or for use with low power lasers. TECHSPEC® UV-NIR Neutral Density (ND) Filters can be stacked to obtain a range of optical densities.

**Note:** UV-NIR Neutral Density Filter kit includes all optical densities. Filter coating is fragile and should be handled with care. Use non-contact cleaning methods only.

## Technical Information

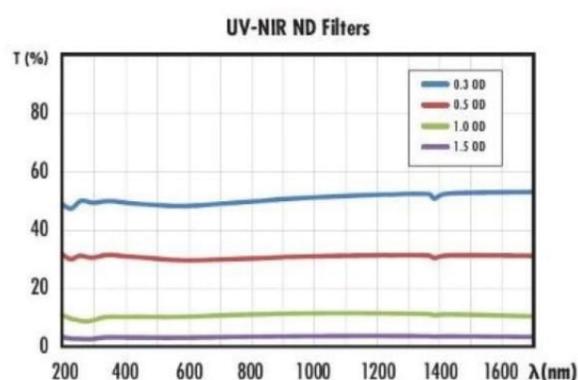

## Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools

## Compatible Mounts

---