

[See all 17 Products in Family](#)

**TECHSPEC® 10mm, Al & AR Coated, Fused Silica, Right Angle Prism**



TECHSPEC UV Fused Silica Right Angle Prisms

Stock **#47-792** **6 In Stock**

⊖ 1 ⊕ ₹10,260

**ADD TO CART**

Volume Pricing	
Qty 1-5	₹10,260 each
Qty 6-25	₹8,550 each
Qty 26-49	₹8,235 each
Need More?	<a href="#">Request Quote</a>

Product Downloads

**General**

Right Angle Prism **Type:**

**Physical & Mechanical Properties**

±0.10 Legs **Dimensional Tolerance (mm):**

Protective as needed **Bevel:**

Length of Hypotenuse (mm):  
14.10

Length of Legs (mm):  
10.00

## Optical Properties

Coating:  
MgF<sub>2</sub> & Aluminized

Substrate:   
[Fused Silica](#) (Corning 7980)

Surface Quality:  
60-40

Angle Tolerance (arcmin):  
±5

Pyramid Tolerance (arcmin):  
±5

Image Orientation:  
Left-Handed

Coating Specification:  
Hypotenuse: R<sub>avg</sub> >85% @ 400 - 700nm  
Legs: R<sub>avg</sub> ≤1.75% @ 400 - 700 nm

Ray Deviation (°):  
90

Wavelength Range (nm):  
400 - 700

Damage Threshold, By Design:   
Hypotenuse: 0.3 J/cm<sup>2</sup> @ 532nm & 1064nm, 10ns  
Legs: 10 J/cm<sup>2</sup> @ 532nm, 10ns

Power (fringes) @ 632.8nm:  
1.25

Irregularity (fringes) @ 632.8nm:  
0.25

## Regulatory Compliance

RoHS 2015:  
[Compliant](#)

Certificate of Conformance:  
[View](#)

Reach 235:  
[Compliant](#)

Country of Origin:  
Singapore


Imported By:  
Edmund Optics India Private Limited

## Product Details

- Ideal for Broadband Applications
- Available with Aluminized and AR Coated Faces
- Sizes Ranging from 5 - 50mm
- Additional [Right Angle Prism](#) Options Available

TECHSPEC® Fused Silica Right Angle Prisms are ideal for broadband applications. Right angle prisms are generally used to bend image paths or redirect light at 90°. This produces a left-handed image and depending on the orientation of the prism, the image may be inverted or reverted. Right angle prisms can also be used in combination for image/beam displacement. TECHSPEC® Fused Silica Right Angle Prisms are made from UV fused silica which features low thermal expansion and excellent transmission throughout the UV, visible, and NIR spectral ranges. The prisms are available in lengths ranging from 5 to 50mm.

## Technical Information

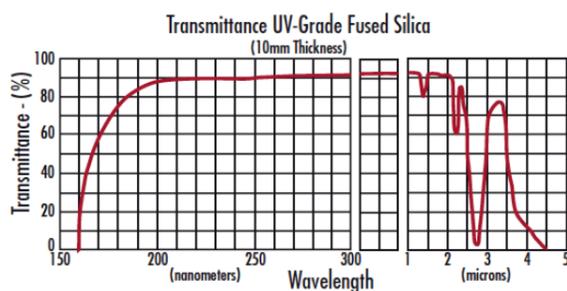

UV FS Transmission Curve

## Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

---