

[See all 51 Products in Family](#)

TECHSPEC<sup>®</sup> 12mm Dia. x 40mm FL, YAG-BBAR Coated, Plano-Convex Lens



UV Fused Silica Plano-Convex (PCX) Lenses



Stock **#18-053** [CONTACT US](#)

-

1

+

₹11,133

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-5        | ₹11,133 each                  |
| Qty 6-25       | ₹8,875 each                   |
| Qty 26-49      | ₹8,330 each                   |
| Need More?     | <a href="#">Request Quote</a> |

Product Downloads

General

Type:  
Plano-Convex Lens

Physical & Mechanical Properties

Diameter (mm):  
12.00 -0.025

|                                                                                                              |                                  |
|--------------------------------------------------------------------------------------------------------------|----------------------------------|
| <1                                                                                                           | Centering (arcmin):              |
| 3.13 ±0.05                                                                                                   | Center Thickness CT (mm):        |
| 2.12                                                                                                         | Edge Thickness ET (mm):          |
| 11                                                                                                           | Clear Aperture CA (mm):          |
| Protective as needed                                                                                         | Bevel:                           |
| Optical Properties                                                                                           |                                  |
| 40.00 @ 587.6nm                                                                                              | Effective Focal Length EFL (mm): |
| 37.85                                                                                                        | Back Focal Length BFL (mm):      |
| YAG-BBAR (500-1100nm)                                                                                        | Coating:                         |
| R <sub>abs</sub> <0.25% @ 532nm<br>R <sub>abs</sub> <0.25% @ 1064nm<br>R <sub>avg</sub> <1.0% @ 500 - 1100nm | Coating Specification:           |
| Fused Silica (Corning 7980)                                                                                  | Substrate: □                     |
| 40-20                                                                                                        | Surface Quality:                 |
| 3 Rings                                                                                                      | Power (P-V) @ 632.8nm:           |
| 0.5 Rings                                                                                                    | Irregularity (P-V) @ 632.8nm:    |
| ±1                                                                                                           | Focal Length Tolerance (%):      |
| 18.34                                                                                                        | Radius R <sub>1</sub> (mm):      |
| 3.33                                                                                                         | f/#:                             |
| 0.15                                                                                                         | Numerical Aperture NA:           |
| 500 - 1100                                                                                                   | Wavelength Range (nm):           |
| 5 J/cm <sup>2</sup> @ 532nm, 10ns                                                                            | Damage Threshold, By Design: □   |

|                                     |                             |
|-------------------------------------|-----------------------------|
| Regulatory Compliance               |                             |
| Compliant                           | RoHS 2015:                  |
| View                                | Certificate of Conformance: |
| Compliant                           | Reach 235:                  |
| Japan                               | Country of Origin:          |
| Edmund Optics India Private Limited | Imported By:                |

## Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

## Product Details

- AR Coated to Provide <1.0% Reflection per Surface for 500 - 1100nm
- Precision Fused Silica Substrate
- Various Coating Options: [Uncoated](#), [MgF<sub>2</sub>](#), [UV-AR](#), [UV-VIS](#), [VIS-EXT](#), [VIS-NIR](#), [VIS 0°](#), [NIR I](#), and [NIR II](#)

TECHSPEC® UV Fused Silica Plano-Convex (PCX) Lenses YAG-BBAR Coated feature precision specifications and a [variety of coating options](#) on a broadband substrate. Fused Silica is commonly used in applications from the Ultraviolet (UV) through the Near-Infrared (NIR). Its low index of refraction, low coefficient of thermal expansion, and low inclusion content make it ideal for laser applications and harsh environmental conditions. TECHSPEC® UV Fused Silica Plano-Convex (PCX) Lenses YAG-BBAR Coated feature industry leading diameter and centration specifications, making them ideal for integration into demanding imaging and targeting applications. These lenses are YAG-BBAR coated and feature less than 0.25% reflection at common Nd:YAG laser wavelengths of 532nm and 1064nm.

# Technical Information

## FUSED SILICA


### Uncoated Fused Silica Typical Transmission



Typical transmission of a 3mm thick, uncoated fused silica window across the UV - NIR spectra.

[Click Here to Download Data](#)

### Fused Silica with MgF<sub>2</sub> Coating Typical Transmission

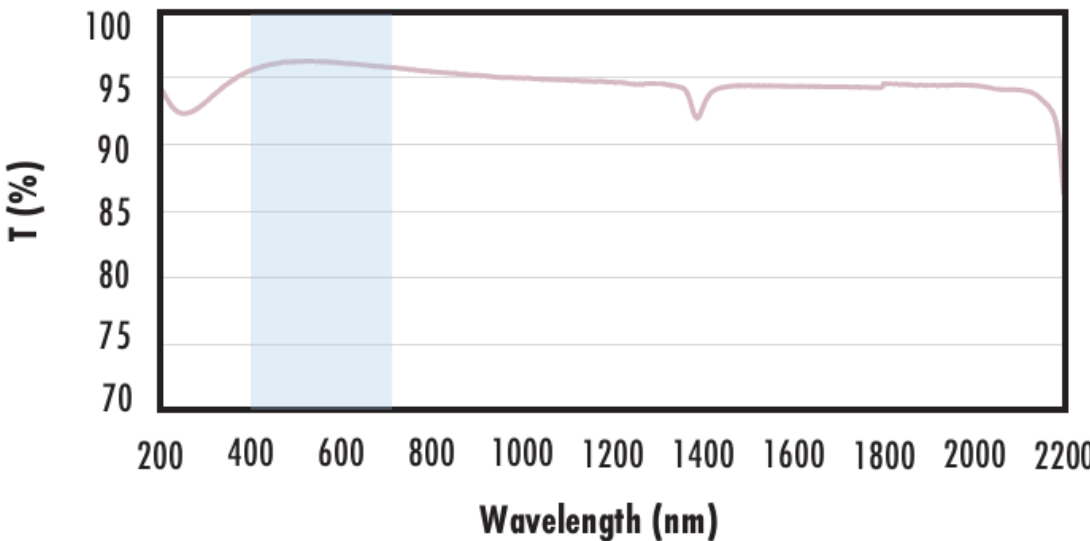

Typical transmission of a 3mm thick fused silica window with MgF<sub>2</sub> (400-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 1.75\% \text{ @ } 400 - 700\text{nm (N-BK7)}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

### Fused Silica with UV-AR Coating Typical Transmission

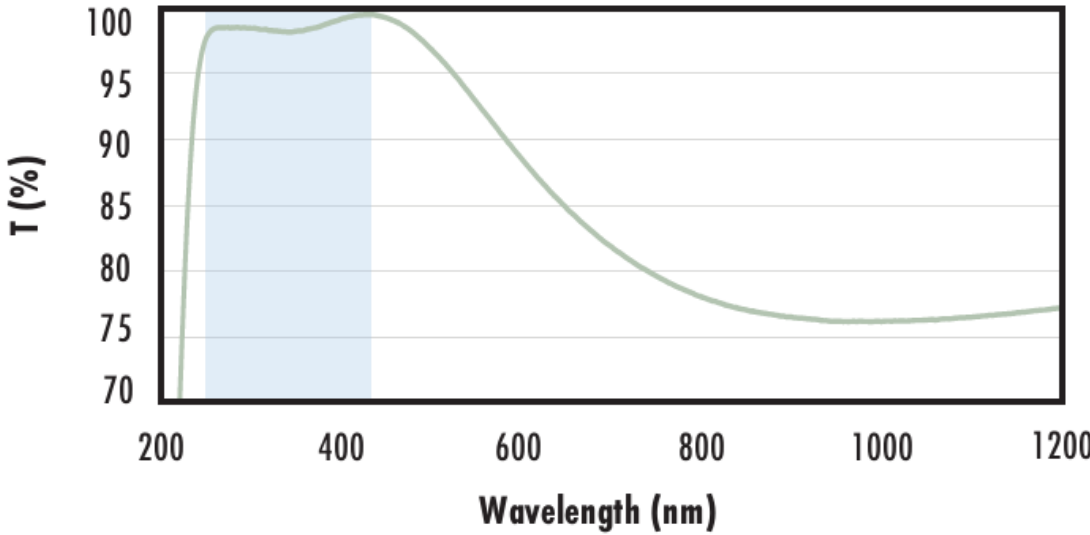

Typical transmission of a 3mm thick fused silica window with UV-AR (250-425nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{abs} \leq 1.0\% \text{ @ } 250 - 425\text{nm}$$

$$R_{avg} \leq 0.75\% \text{ @ } 250 - 425\text{nm}$$

$$R_{avg} \leq 0.5\% \text{ @ } 370 - 420\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

### Fused Silica with UV-VIS Coating Typical Transmission



Typical transmission of a 3mm thick fused silica window with UV-VIS (250-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{abs} \leq 1.0\% \text{ @ } 350 - 450\text{nm}$$

$$R_{avg} \leq 1.5\% \text{ @ } 250 - 700\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)
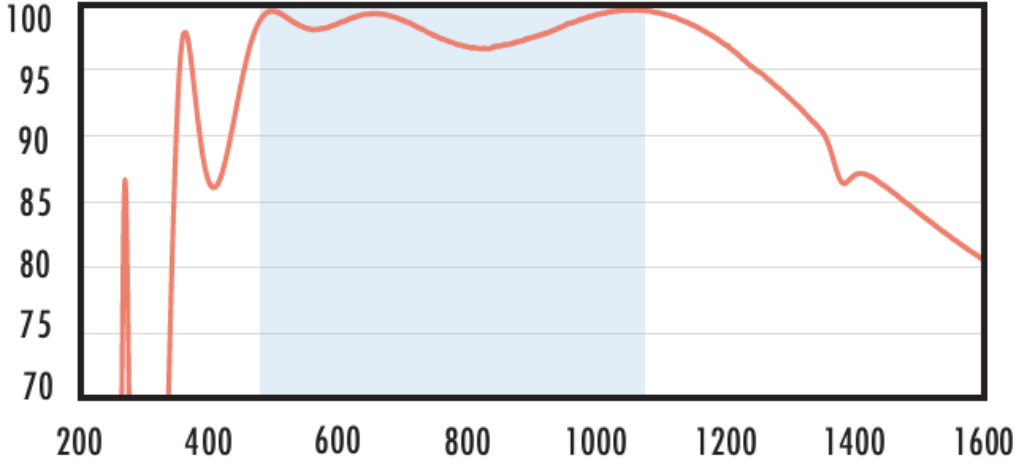
|                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <p data-bbox="569 299 1079 403"><b>Fused Silica with VIS-EXT Coating</b><br/><b>Typical Transmission</b></p>       | <p data-bbox="1341 483 1839 531">Typical transmission of a 3mm thick fused silica window with VIS-EXT (350-700nm) coating at 0° AOI.</p> <p data-bbox="1341 546 1850 593">The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p data-bbox="1478 608 1709 632"><math>R_{avg} \leq 0.5\% @ 350 - 700\text{nm}</math></p> <p data-bbox="1341 647 1839 694">Data outside this range is not guaranteed and is for reference only.</p> <p data-bbox="1478 709 1709 733"><a href="#">Click Here to Download Data</a></p>                                                                                                                                                                                                  |
| <p data-bbox="569 976 1089 1080"><b>Fused Silica with VIS-NIR Coating</b><br/><b>Typical Transmission</b></p>    | <p data-bbox="1341 1121 1839 1169">Typical transmission of a 3mm thick fused silica window with VIS-NIR (400-1000nm) coating at 0° AOI.</p> <p data-bbox="1341 1184 1850 1231">The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p data-bbox="1499 1246 1688 1270"><math>R_{abs} \leq 0.25\% @ 880\text{nm}</math></p> <p data-bbox="1478 1270 1709 1294"><math>R_{avg} \leq 1.25\% @ 400 - 870\text{nm}</math></p> <p data-bbox="1478 1294 1709 1317"><math>R_{avg} \leq 1.25\% @ 890 - 1000\text{nm}</math></p> <p data-bbox="1341 1353 1839 1400">Data outside this range is not guaranteed and is for reference only.</p> <p data-bbox="1478 1415 1709 1439"><a href="#">Click Here to Download Data</a></p> |
| <p data-bbox="569 1644 1073 1748"><b>Fused Silica with VIS 0° Coating</b><br/><b>Typical Transmission</b></p>    | <p data-bbox="1341 1828 1850 1875">Typical transmission of a 3mm thick fused silica window with VIS 0° (425-675nm) coating at 0° AOI.</p> <p data-bbox="1341 1890 1850 1938">The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p data-bbox="1478 1952 1709 1976"><math>R_{avg} \leq 0.4\% @ 425 - 675\text{nm}</math></p> <p data-bbox="1341 1991 1839 2039">Data outside this range is not guaranteed and is for reference only.</p> <p data-bbox="1478 2053 1709 2077"><a href="#">Click Here to Download Data</a></p>                                                                                                                                                                                         |
| <p data-bbox="548 2318 1106 2421"><b>Fused Silica with YAG-BBAR Coating</b><br/><b>Typical Transmission</b></p>  | <p data-bbox="1341 2472 1839 2519">Typical transmission of a 3mm thick fused silica window with YAG-BBAR (500-1100nm) coating at 0° AOI.</p> <p data-bbox="1341 2534 1850 2582">The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p data-bbox="1499 2597 1688 2620"><math>R_{abs} \leq 0.25\% @ 532\text{nm}</math></p> <p data-bbox="1499 2620 1688 2644"><math>R_{abs} \leq 0.25\% @ 1064\text{nm}</math></p> <p data-bbox="1478 2644 1709 2668"><math>R_{avg} \leq 1.0\% @ 500 - 1100\text{nm}</math></p> <p data-bbox="1341 2683 1839 2730">Data outside this range is not guaranteed and is for reference only.</p> <p data-bbox="1478 2745 1709 2769"><a href="#">Click Here to Download Data</a></p>      |

