See all 67 Products in Family

LightPath 354260 | 1310nm Alignment, 0.16 NA Fiber Collimator w/ SMA Connector

See More by Lightpath®

Fiber Optic Collimator and Focuser Assemblies

Stock **#47-229** CLEARANCE **1 In Stock**

- 1 + **MRP** ₹12,527

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1+	**₹12,527** each
Need More?	Request Quote

Product Downloads

General

Lightpath Lens Code:	354260
Type:	Fiber Collimator
Lens Included:	#37-100

Physical & Mechanical Properties

Clear Aperture CA (mm):
5.00

Bevel:
Protective as needed

Construction:
304L Stainless Steel Housing

Housing Diameter (mm):
11.00

Housing Length (mm):
20.2

Optical Properties

Effective Focal Length EFL (mm):
15.29 @ 780nm

Numerical Aperture NA:
0.16

Substrate:
D-ZK3

Coating:
BBAR (1050-1600nm)

Coating Specification:
R_{abs} <1.0% @ 1050 - 1600nm

Surface Quality:
40-20

f/#:
3.13

Abbe Number (v_d):
61.16

Index of Refraction (n_d):
1.586

Wavelength Range (nm):
1050 - 1600

Conjugate Distance:
Infinite

Focal Length Specification Wavelength (nm):
780.00

Alignment Wavelength (nm):
1310

Transmitted Wavefront Error (λ, RMS):
< 0.090

Hardware & Interface Connectivity

Connector:
SMA

Threading & Mounting

Mount:
M11 x 0.5

Material Properties

Coefficient of Thermal Expansion CTE (10^{-6}/°C):
7.6

Regulatory Compliance

RoHS 2015:
Compliant

Certificate of Conformance:
View

Reach 233:
Compliant

Country of Origin:
China

Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91- 80-6845 0000

Product Details

- Easy to Integrate
- Models for FC/PC, FC/APC, and SMA Connections Available
- Four Wavelength Ranges Covering 350-1600nm

LightPath® Fiber Optic Collimators are designed to collimate light exiting a fiber to a desired beam diameter or spot size or to focus light into a fiber when used in reverse. The lenses are diffraction limited, so they can achieve spot sizes down to a few microns. Lenses also feature an antireflection coating for low back reflection. LightPath® Fiber Optic Collimators are designed so that they can be used in pairs to couple the input and output light of optical devices. Optimum performance for long-term use is ensured by the factory set and tested lens alignment. Typical applications can include use with fiber coupled lasers and pigtailed receptacles, as well as communications and data transfer.

Technical Information

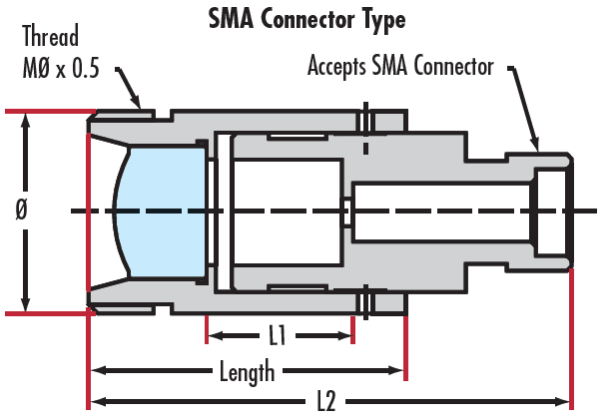

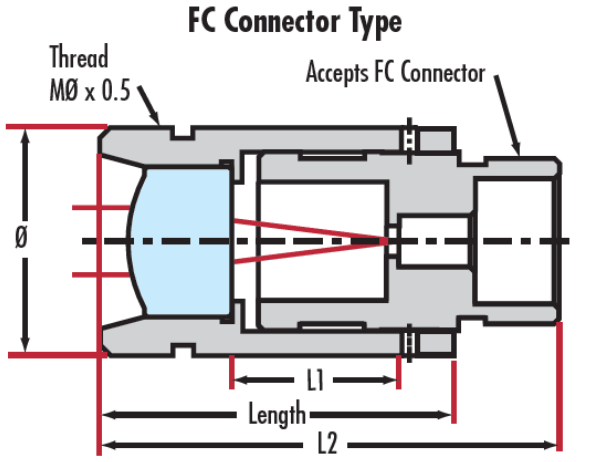

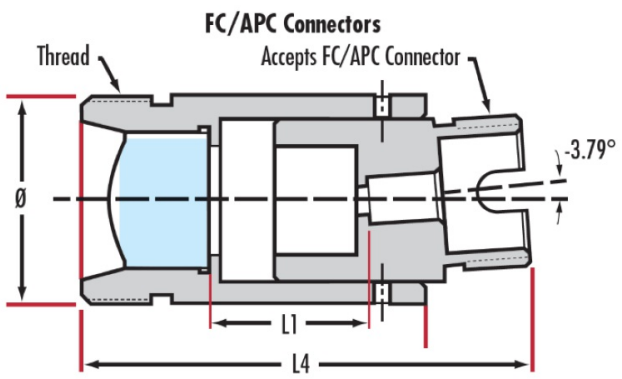

;