

TECHSPEC® 15mm, 1064nm V-Coat, Laser Line Fused Silica Right Angle Prism



Stock #83-332 **14 In Stock**

⊖ 1 ⊕ MRP ₹17,958

● Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-5	₹17,958 each
Qty 6-25	₹14,428 each
Qty 26-49	₹13,519 each
Need More?	Request Quote

Product Downloads

General

Right Angle Prism **Type:**

Physical & Mechanical Properties

+0.00/-0.10 **Dimensional Tolerance (mm):**

Protective as needed **Bevel:**

Length of Hypotenuse (mm):
21.20

Length of Legs (mm):
15.00

Optical Properties

Angle Tolerance (arcsec):
±40

Coating:
Laser V-Coat (1064nm)

Design Wavelength DWL (nm):
1064

Substrate:
[Fused Silica](#) (Coming 7980)

Surface Quality:
20-10

Pyramid Tolerance (arcmin):
±1

Image Orientation:
Left-Handed

Coating Specification:
 $R_{\text{abs}} < 0.25\%$ @ 1064nm

Ray Deviation (°):
90

Damage Threshold, By Design:
 15 J/cm^2 @ 1064nm, 20ns, 20Hz

Power (fringes) @ 632.8nm:
1.25

Irregularity (fringes) @ 632.8nm:
0.20

Regulatory Compliance

RoHS 2015:
[Compliant](#)

Reach 209:
[Compliant](#)

Certificate of Conformance:
[View](#)

Country of Origin:
Singapore

Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91- 80-6845 0000

Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

Product Details


- 355nm, 532nm and 1064nm Options Available
- High Damage Threshold
- Ray Deviation of 90°
- Additional [Right Angle Prisms](#) Available

TECHSPEC® High Power Laser Line Fused Silica Right Angle Prisms provide high damage thresholds ranging from 2 - 5J/cm² allowing for easy integration into most Nd:YAG laser systems. They feature low arcsecond angle tolerance and are made from precision UV fused silica, making them ideal for laser based applications requiring precise alignment.



Right angle prisms are generally used to bend image paths or redirect light at 90°. This produces a left handed image and depending on the orientation of the prism, the image may be inverted or reverted. Right angle prisms can also be used in combination for image/beam displacement.

LASER OPTICS MADE BY EDMUND OPTICS®


[LEARN MORE](#)




Technical Information

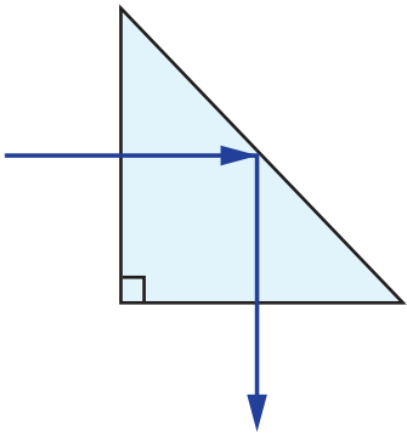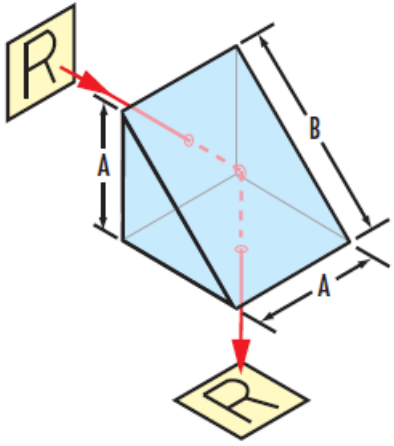


Right Angle Prism Ray Path

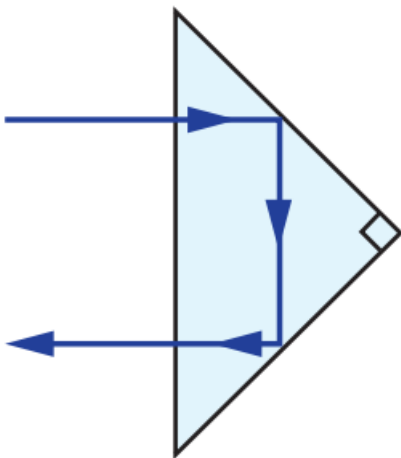

Right Angle Prism Ray Path

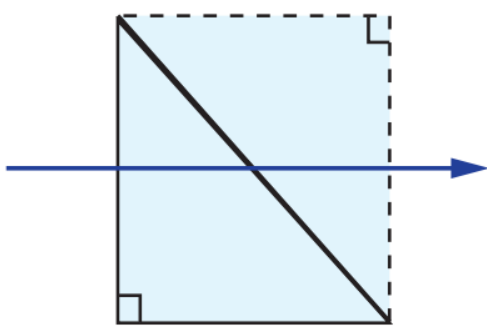

Right Angle Prism Tunnel Diagram

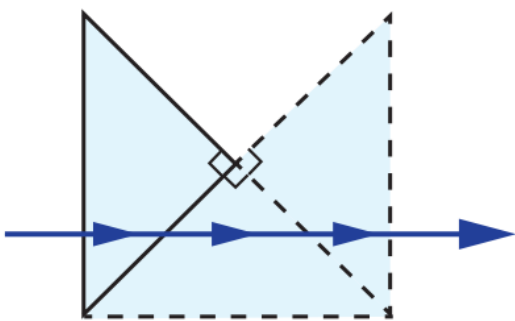

Right Angle Prism Tunnel Diagram