

TECHSPEC[®] 25.4mm Dia. x 76.2mm FL, NIR II Coated, Plano-Convex Lens



Stock **#67-564** 7 In Stock

☐ [Other Coating Options](#)

-

1

+

₹3,348

ADD TO CART

Volume Pricing	
Qty 1-9	₹3,348 each
Qty 10-24	₹2,997 each
Qty 25-49	₹2,686 each
Need More?	Request Quote

Product Downloads

General

Type:
Plano-Convex Lens

Physical & Mechanical Properties

Diameter (mm):
25.40 +0.0/-0.025

<1	Centering (arcmin):
4.00 ±0.10	Center Thickness CT (mm):
1.90	Edge Thickness ET (mm):
24.4	Clear Aperture CA (mm):
Protective as needed	Bevel:

Optical Properties

76.20 @ 587.6nm	Effective Focal Length EFL (mm):
73.56	Back Focal Length BFL (mm):
NIR II (750-1550nm)	Coating:
R _{abs} ≤1.5% @ 750 - 800nm R _{abs} ≤1.0% @ 800 - 1550nm R _{avg} ≤0.7% @ 750 - 1550nm	Coating Specification:
N-BK7	Substrate: ☐
40-20	Surface Quality:
1.5λ	Power (P-V) @ 632.8nm:
λ/4	Irregularity (P-V) @ 632.8nm:
±1	Focal Length Tolerance (%):
39.38	Radius R ₁ (mm):
3	f/#:
0.17	Numerical Aperture NA:
750 - 1550	Wavelength Range (nm):
8 J/cm ² @ 1064nm, 10ns	Damage Threshold, Reference: ☐

Regulatory Compliance

Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 235:
Japan	Country of Origin:
Edmund Optics India Private Limited	Imported By:

Product Details

- AR Coated to Provide <0.7% Reflectance per Surface for 750 - 1550nm
- Designed for 0° Angle of Incidence
- Various PCX Coating Options: [Uncoated](#), [MgF₂](#), [VIS 0°](#), [VIS-NIR](#), [NIR I](#), [VIS-EXT](#), and [YAG-BBAR](#)

TECHSPEC® NIR II Coated Plano-Convex Lenses have a positive focal length, making them ideal for collecting and focusing light in imaging applications. They are also useful in a variety of applications involving emitters, detectors, lasers, and fiber optics. TECHSPEC® NIR II Coated Plano-Convex Lenses are available in a wide variety of diameters and focal lengths. Identical designs of these PCX lenses are also offered [uncoated](#) or with broadband anti-reflective (BBAR) coatings, which include [MgF₂](#), [VIS 0°](#), [VIS-NIR](#), [NIR I](#), [VIS-EXT](#), and [YAG-BBAR](#).

Technical Information



N-BK7


Uncoated N-BK7 Typical Transmission



Typical transmission of a 3mm thick, uncoated N-BK7 window across the UV - NIR spectra.

[Click Here to Download Data](#)

N-BK7 with MgF₂ Coating Typical Transmission

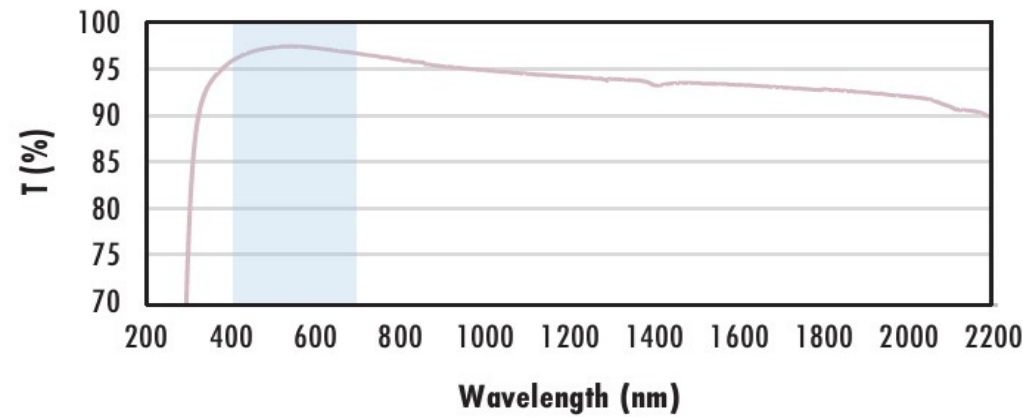

Typical transmission of a 3mm thick N-BK7 window with MgF₂ (400-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{avg} \leq 1.75\% @ 400 - 700\text{nm}$ (N-BK7)

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

N-BK7 with VIS-EXT Coating Typical Transmission

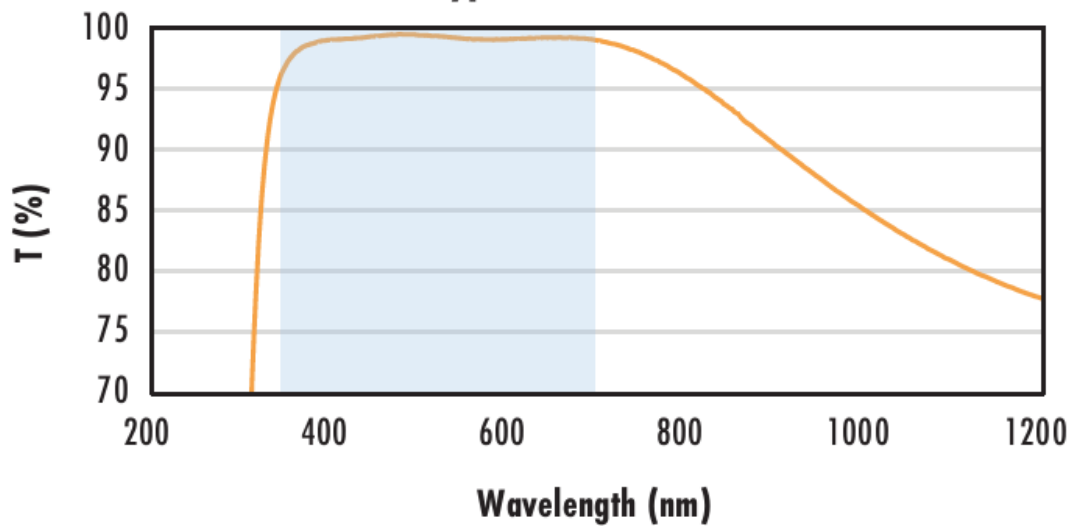

Typical transmission of a 3mm thick N-BK7 window with VIS-EXT (350-700nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{avg} \leq 0.5\% @ 350 - 700\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

N-BK7 with VIS-NIR Coating Typical Transmission



Typical transmission of a 3mm thick N-BK7 window with VIS-NIR (400-1000nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{abs} \leq 0.25\% @ 880\text{nm}$

$R_{avg} \leq 1.25\% @ 400 - 870\text{nm}$

$R_{avg} \leq 1.25\% @ 890 - 1000\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

2004006008001000120014001600 Wavelength (nm)																									
N-BK7 with VIS 0° Coating Typical Transmission <table border="1"><caption>Approximate data for N-BK7 with VIS 0° Coating</caption><thead><tr><th>Wavelength (nm)</th><th>Transmission T (%)</th></tr></thead><tbody><tr><td>400</td><td>70</td></tr><tr><td>425</td><td>95</td></tr><tr><td>450</td><td>98</td></tr><tr><td>500</td><td>99</td></tr><tr><td>600</td><td>100</td></tr><tr><td>675</td><td>100</td></tr><tr><td>800</td><td>95</td></tr><tr><td>1000</td><td>80</td></tr><tr><td>1200</td><td>75</td></tr></tbody></table>	Wavelength (nm)	Transmission T (%)	400	70	425	95	450	98	500	99	600	100	675	100	800	95	1000	80	1200	75	Typical transmission of a 3mm thick N-BK7 window with VIS 0° (425-675nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 0.4\%$ @ 425 - 675nm Data outside this range is not guaranteed and is for reference only. Click Here to Download Data				
Wavelength (nm)	Transmission T (%)																								
400	70																								
425	95																								
450	98																								
500	99																								
600	100																								
675	100																								
800	95																								
1000	80																								
1200	75																								
N-BK7 with YAG-BBAR Coating Typical Transmission <table border="1"><caption>Approximate data for N-BK7 with YAG-BBAR Coating</caption><thead><tr><th>Wavelength (nm)</th><th>Transmission T (%)</th></tr></thead><tbody><tr><td>400</td><td>70</td></tr><tr><td>450</td><td>90</td></tr><tr><td>500</td><td>98</td></tr><tr><td>600</td><td>98</td></tr><tr><td>800</td><td>97</td></tr><tr><td>1000</td><td>99</td></tr><tr><td>1100</td><td>100</td></tr><tr><td>1200</td><td>95</td></tr><tr><td>1400</td><td>85</td></tr><tr><td>1600</td><td>80</td></tr></tbody></table>	Wavelength (nm)	Transmission T (%)	400	70	450	90	500	98	600	98	800	97	1000	99	1100	100	1200	95	1400	85	1600	80	Typical transmission of a 3mm thick N-BK7 window with YAG-BBAR (500-1100nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 0.25\%$ @ 532nm $R_{abs} \leq 0.25\%$ @ 1064nm $R_{avg} \leq 1.0\%$ @ 500 - 1100nm Data outside this range is not guaranteed and is for reference only. Click Here to Download Data		
Wavelength (nm)	Transmission T (%)																								
400	70																								
450	90																								
500	98																								
600	98																								
800	97																								
1000	99																								
1100	100																								
1200	95																								
1400	85																								
1600	80																								
N-BK7 with NIR I Coating Typical Transmission <table border="1"><caption>Approximate data for N-BK7 with NIR I Coating</caption><thead><tr><th>Wavelength (nm)</th><th>Transmission T (%)</th></tr></thead><tbody><tr><td>400</td><td>70</td></tr><tr><td>450</td><td>80</td></tr><tr><td>500</td><td>88</td></tr><tr><td>600</td><td>98</td></tr><tr><td>800</td><td>99</td></tr><tr><td>1000</td><td>99</td></tr><tr><td>1050</td><td>100</td></tr><tr><td>1200</td><td>95</td></tr><tr><td>1400</td><td>85</td></tr><tr><td>1600</td><td>80</td></tr></tbody></table>	Wavelength (nm)	Transmission T (%)	400	70	450	80	500	88	600	98	800	99	1000	99	1050	100	1200	95	1400	85	1600	80	Typical transmission of a 3mm thick N-BK7 window with NIR I (600 - 1050nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 0.5\%$ @ 600 - 1050nm Data outside this range is not guaranteed and is for reference only. Click Here to Download Data		
Wavelength (nm)	Transmission T (%)																								
400	70																								
450	80																								
500	88																								
600	98																								
800	99																								
1000	99																								
1050	100																								
1200	95																								
1400	85																								
1600	80																								
N-BK7 with NIR II Coating Typical Transmission <table border="1"><caption>Approximate data for N-BK7 with NIR II Coating</caption><thead><tr><th>Wavelength (nm)</th><th>Transmission T (%)</th></tr></thead><tbody><tr><td>400</td><td>70</td></tr><tr><td>450</td><td>85</td></tr><tr><td>500</td><td>95</td></tr><tr><td>600</td><td>98</td></tr><tr><td>750</td><td>99</td></tr><tr><td>1000</td><td>99</td></tr><tr><td>1200</td><td>99</td></tr><tr><td>1400</td><td>98</td></tr><tr><td>1550</td><td>95</td></tr><tr><td>1800</td><td>90</td></tr><tr><td>2000</td><td>85</td></tr></tbody></table>	Wavelength (nm)	Transmission T (%)	400	70	450	85	500	95	600	98	750	99	1000	99	1200	99	1400	98	1550	95	1800	90	2000	85	Typical transmission of a 3mm thick N-BK7 window with NIR II (750 - 1550nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 1.5\%$ @ 750 - 800nm $R_{abs} \leq 1.0\%$ @ 800 - 1550nm $R_{avg} \leq 0.7\%$ @ 750 - 1550nm Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
Wavelength (nm)	Transmission T (%)																								
400	70																								
450	85																								
500	95																								
600	98																								
750	99																								
1000	99																								
1200	99																								
1400	98																								
1550	95																								
1800	90																								
2000	85																								

Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we

provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

Compatible Mounts
