

[See all 1 Products in Family](#)

## 25.4mm Dia., 1000 - 1100nm, High-Power Low-Loss Laser Mirror

See More by [UltraFast Innovations \(UFI\)](#)



UltraFast Innovations (UFI) High-Power Low-Loss Laser Mirrors

Stock **#15-961** **8 In Stock**

MRP ₹83,739

**i** Price inclusive of all taxes

**ADD TO CART**

Volume Pricing	
Qty 1-5	₹83,739 each
Qty 6+	₹73,650 each
Need More?	<a href="#">Request Quote</a>

### Product Downloads

#### General

HR2007 **Model Number:**

#### Physical & Mechanical Properties

10±5 **Wedge Angle (arcmin):**

80 **Clear Aperture (%):**

Commercial Polish	<b>Back Surface:</b>
25.40 +0.00/-0.05	<b>Diameter (mm):</b>
12.70 ±0.05	<b>Thickness (mm):</b>
0.75	<b>Bevel:</b>

## Optical Properties

>99.99% @ 1030 & 1064nm	<b>Reflectivity (Rs%):</b>
>99.98% @ 1030 & 1064nm	<b>Reflectivity (Rp%):</b>
0fs <sup>2</sup> @ 1030nm & 1064nm, 45°, s- and p-pol	<b>GDD Specification:</b>
1000 - 1100	<b>Wavelength Range (nm):</b>
M10	<b>Irregularity (P-V) @ 632.8nm:</b>
Dielectric	<b>Coating Type:</b>
1030, 1064	<b>Design Wavelength DWL (nm):</b>
45	<b>Angle of Incidence (°):</b>
<a href="#">Fused Silica</a> (Corning 7980)	<b>Substrate:</b> <input type="checkbox"/>
50 J/cm <sup>2</sup> @ 1064nm, 100Hz, 8ns pulses	<b>Damage Threshold, By Design:</b> <input type="checkbox"/>
0 fs <sup>2</sup> @ 45° AOI, 1030 and 1064nm, s- and p- pol	<b>Average GDD (fs<sup>2</sup>):</b>

## Regulatory Compliance

<a href="#">Compliant</a>	<b>RoHS 2015:</b>
<a href="#">View</a>	<b>Certificate of Conformance:</b>
<a href="#">Compliant</a>	<b>Reach 235:</b>
Germany	<b>Country of Origin:</b>
Edmund Optics India Private Limited 267, Greystone Building, Second Floor, 6th Cross Rd, Binnamangala, Stage 1, Indiranagar, Bengaluru, Karnataka, India 560038 Phone: +91- 80-6845 0000	<b>Imported By:</b>

## Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).


## Product Details

- >99.99% Reflectivity at 1030nm and 1064nm
- Laser Damage Threshold of 50 J/cm<sup>2</sup> at 1064nm, 100Hz, 8ns
- Universal Designs for Nanosecond, Picosecond, and Femtosecond Laser Pulses
- Custom Options are Available up to 200mm Diameter

UltraFast Innovations (UFI) High-Power Low-Loss Laser Mirrors provide >99.99% reflectivity with industry leading damage thresholds. Laser grade surface quality and surface flatness with 0fs<sup>2</sup> group delay dispersion (GDD) at 1030nm and 1064nm make these mirrors ideal for the requirements of demanding laser applications. With >99.99% reflectivity of s-polarized light and >99.98% reflectivity of p-polarized light, these mirrors can be used with nanosecond, picosecond, and femtosecond lasers. Durable dielectric coatings are tested to ensure a high laser damage threshold of >50 J/cm<sup>2</sup> at 1064nm, 100Hz, 8ns. UFI High-Power Low-Loss Laser Mirrors feature fused silica substrates with excellent thermal stability and a 25.4mm diameter to facilitate integration into 1030nm or 1064nm laser systems. Please contact us if your application requires a High Power Low Loss Laser Mirror with a custom size or coating.

## Technical Information

1000 - 1100nm High Power Low Loss Laser Mirror

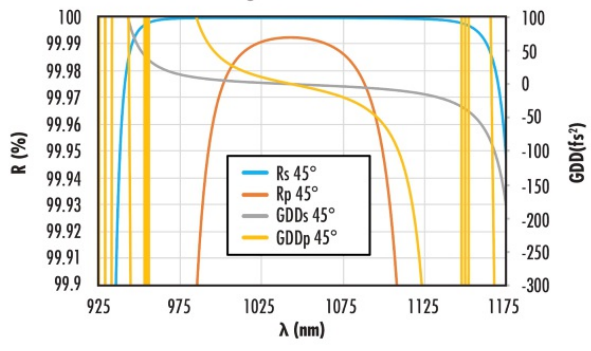

;