

[See all 3 Products in Family](#)

TECHSPEC® 25mm Dia., 0.50 NA, Uncoated, Calibration Grade Aspheric Lens



Calibration Grade Aspheric Lenses

Stock #69-142 **6 In Stock**

⊖ 1 ⊕ ₹36,823

ADD TO CART

Volume Pricing	
Qty 1-5	₹36,823 each
Qty 6-25	₹33,164 each
Qty 26-49	₹29,505 each
Need More?	Request Quote

Product Downloads

General

Aspheric Lens

Type:

Physical & Mechanical Properties

25.00 +0.0/-0.1

Diameter (mm):

≤1

Centering (arcmin):

22.00	Clear Aperture CA (mm):
1.74	Edge Thickness ET (mm):
7.50	Center Thickness CT (mm):
Protective as needed	Bevel:
Plano	Shape of Back Surface:
Optical Properties	
25.00 @ 587.6nm	Effective Focal Length EFL (mm):
0.50	Numerical Aperture NA:
20.28	Back Focal Length BFL (mm):
L-BAL35	Substrate: <input type="checkbox"/>
587.6	Aspheric Design Wavelength (nm):
Uncoated	Coating:
20-10	Surface Quality:
1.00	f/#:
330 - 2400	Wavelength Range (nm):
Infinite	Conjugate Distance:
0.4λ RMS and 2λ PV	Asphere Figure Error, @ 632.8nm:
40.00	Power (diopters):

Regulatory Compliance	
View	Certificate of Conformance:
Singapore	Country of Origin:
Edmund Optics India Private Limited	Imported By:


Product Details


- Complete Metrology Data Provided
- Precision Grade Aspheric Surface
- 0.66 and 0.50 NA Lenses

Our TECHSPEC® Calibration Grade Aspheric Lenses offer the ultimate in performance and precision available from an off-the-shelf polished aspheric lenses. Featuring improved aspheric surface figure, surface quality, and centering specification over our [TECHSPEC® Aspheric lenses](#), these optical components are ideal for integration into R&D and OEM applications alike. With high numerical apertures, the lenses are ideal for improving the efficiency of low light level detection systems, or for applications requiring a compact optical path.

Each aspheric lens is serialized and provided with a complete metrology data package. The test data package includes a surface profile performed on our Taylor Hobson Talysurf Profilometer, an interferogram of the spherical surface, and tested values for diameter, center thickness, and centration. For custom designed calibration grade aspheric lenses, coating requirements, or volume pricing, please contact our [Sales Department](#).

Technical Information

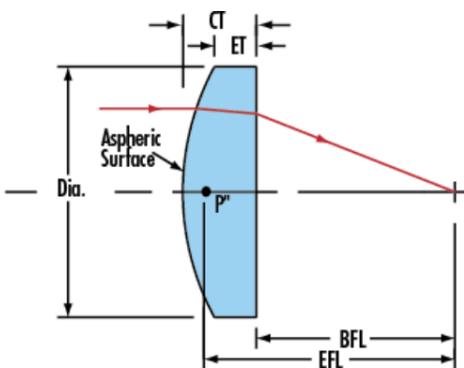

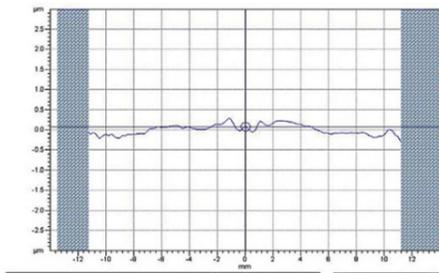

Fit	77.8898 mm	Pa	0.1049 µm	P1	0.5917 µm
Smn	0.009 mm	Smx	0.056 mm	Txt	0.014 mm
Sp	-1.1133 mm	Spr	11.2133 mm	X2	12.9556 mm
RMS	0.1228 µm				

Date Item Setup	
Item Name	11.60101001
Date Created	0.75000
Shape	Circle
Dat Points	
P01	0.000000000
P02	0.000000000
P03	0.000000000
P04	-2.000000000
P05	0.000000000
P06	-2.000000000
P07	0.000000000
P08	-1.410000000
P09	0.000000000
P10	6.830000000
P11	0.000000000
P12	0.000000000
P13	0.000000000
P14	0.000000000
P15	0.000000000
P16	0.000000000
P17	0.000000000
P18	0.000000000
P19	0.000000000
P20	0.000000000
P21	0.000000000
P22	0.000000000
P23	0.000000000
P24	0.000000000
P25	0.000000000
P26	0.000000000
P27	0.000000000
P28	0.000000000
P29	0.000000000
P30	0.000000000
P31	0.000000000
P32	0.000000000
P33	0.000000000
P34	0.000000000
P35	0.000000000
P36	0.000000000
P37	0.000000000
P38	0.000000000
P39	0.000000000
P40	0.000000000
P41	0.000000000
P42	0.000000000
P43	0.000000000
P44	0.000000000
P45	0.000000000
P46	0.000000000
P47	0.000000000
P48	0.000000000
P49	0.000000000
P50	0.000000000
P51	0.000000000
P52	0.000000000
P53	0.000000000
P54	0.000000000
P55	0.000000000
P56	0.000000000
P57	0.000000000
P58	0.000000000
P59	0.000000000
P60	0.000000000
P61	0.000000000
P62	0.000000000
P63	0.000000000
P64	0.000000000
P65	0.000000000
P66	0.000000000
P67	0.000000000
P68	0.000000000
P69	0.000000000
P70	0.000000000
P71	0.000000000
P72	0.000000000
P73	0.000000000
P74	0.000000000
P75	0.000000000
P76	0.000000000
P77	0.000000000
P78	0.000000000
P79	0.000000000
P80	0.000000000
P81	0.000000000
P82	0.000000000
P83	0.000000000
P84	0.000000000
P85	0.000000000
P86	0.000000000
P87	0.000000000
P88	0.000000000
P89	0.000000000
P90	0.000000000
P91	0.000000000
P92	0.000000000
P93	0.000000000
P94	0.000000000
P95	0.000000000
P96	0.000000000
P97	0.000000000
P98	0.000000000
P99	0.000000000
P100	0.000000000
P101	0.000000000
P102	0.000000000
P103	0.000000000
P104	0.000000000
P105	0.000000000
P106	0.000000000
P107	0.000000000
P108	0.000000000
P109	0.000000000
P110	0.000000000
P111	0.000000000
P112	0.000000000
P113	0.000000000
P114	0.000000000
P115	0.000000000
P116	0.000000000
P117	0.000000000
P118	0.000000000
P119	0.000000000
P120	0.000000000
P121	0.000000000
P122	0.000000000
P123	0.000000000
P124	0.000000000
P125	0.000000000
P126	0.000000000
P127	0.000000000
P128	0.000000000
P129	0.000000000
P130	0.000000000
P131	0.000000000
P132	0.000000000
P133	0.000000000
P134	0.000000000
P135	0.000000000
P136	0.000000000
P137	0.000000000
P138	0.000000000
P139	0.000000000
P140	0.000000000
P141	0.000000000
P142	0.000000000
P143	0.000000000
P144	0.000000000
P145	0.000000000
P146	0.000000000
P147	0.000000000
P148	0.000000000
P149	0.000000000
P150	0.000000000
P151	0.000000000
P152	0.000000000
P153	0.000000000
P154	0.000000000
P155	0.000000000
P156	0.000000000
P157	0.000000000
P158	0.000000000
P159	0.000000000
P160	0.000000000
P161	0.000000000
P162	0.000000000
P163	0.000000000
P164	0.000000000
P165	0.000000000
P166	0.000000000
P167	0.000000000
P168	0.000000000
P169	0.000000000
P170	0.000000000
P171	0.000000000
P172	0.000000000
P173	0.000000000
P174	0.000000000
P175	0.000000000
P176	0.000000000
P177	0.000000000
P178	0.000000000
P179	0.000000000
P180	0.000000000
P181	0.000000000
P182	0.000000000
P183	0.000000000
P184	0.000000000
P185	0.000000000
P186	0.000000000
P187	0.000000000
P188	0.000000000
P189	0.000000000
P190	0.000000000
P191	0.000000000
P192	0.000000000
P193	0.000000000
P194	0.000000000
P195	0.000000000
P196	0.000000000
P197	0.000000000
P198	0.000000000
P199	0.000000000
P200	0.000000000

Compatible Mounts