

**TECHSPEC®**

# 25mm Dia. 0.5° Beam Dev. Fused Silica Wedge Prism 1064nm Laser V-Coat



Stock #39-130 **1 In Stock**

1 **MRP ₹17,958**

Price inclusive of all taxes

**ADD TO CART**

TECHSPEC Fused Silica Wedge Prisms

Volume Pricing	
Qty 1-5	₹17,958 each
Qty 6-25	₹14,326 each
Qty 26-49	₹13,419 each
Need More?	<a href="#">Request Quote</a>

**Product Downloads**

- STEP:step
- Curve:pdf
- PDF Drawing:pdf
- IGES:igs
- Curve (xlsx):xlsx
- eDrawing:eprt
- EO Spec Sheet
- [Download All](#)

## General

**Note:** Specify this is S1 & S2 power and irregularity, not the overall power of the wedge

## Physical & Mechanical Properties

<b>Diameter (mm):</b>	25.00	<b>Thickness (mm):</b>	3.00
<b>Bevel:</b>	Protective as needed	<b>Wedge Angle (arcmin):</b>	1° 3'

## Optical Properties

<b>Angle Tolerance (arcsec):</b>	15	<b>Coating:</b>	Laser V-Coat (1064nm)
<b>Design Wavelength DWL (nm):</b>	1064	<b>Substrate:</b>	<a href="#">Fused Silica</a> (Corning 7980)
<b>Surface Quality:</b>	20-10	<b>Image Orientation:</b>	Beam Deviation
<b>Coating Specification:</b>	R <sub>abs</sub> < 0.25% @ 1064nm	<b>Damage Threshold, By Design:</b>	15 J/cm <sup>2</sup> @ 1064nm, 20ns, 20Hz
<b>Power (fringes) @ 632.8nm:</b>	0.50	<b>Irregularity (fringes) @ 632.8nm:</b>	0.20
<b>Ray Deviation @ 355nm (°):</b>	0.50	<b>Power (diopters):</b>	0.87
<b>Wedge Angle (°):</b>	1.05°		

## Material Properties

**Coefficient of Thermal Expansion CTE** (10<sup>-6</sup>/°C): 0.52

## Regulatory Compliance

RoHS 2015: **Compliant**

Reach 209: **Compliant**

**Certificate of Conformance:** [View](#)

Country of Origin: Singapore

**Imported By:** Edmund Optics India Private Limited  
267, Greystone Building,  
Second Floor,  
6th Cross Rd,  
Binnamangala,  
Stage 1,  
Indiranagar,  
Bengaluru,  
Karnataka,  
India 560038  
Phone: +91-80-6845 0000

## Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

## Product Details

- Deviates Laser Beam Path from 0.5° - 5.0°
- Ideal for UV to NIR Beam Steering Applications from 250 to 1064nm
- Ideal for High Power Beam Steering Applications

TECHSPEC® Fused Silica Wedge Prisms are designed for a range of laser beam steering applications requiring UV-VIS or first through fourth Nd:YAG harmonic Anti-Reflection Coatings. They are optimized to ensure the highest level of system performance using tightly controlled specifications including  $\lambda/10$  surface flatness, 20-10 surface quality, and a wedge tolerance of 15 or 30 arcseconds. The Nd:YAG coated versions feature high transmittance and guaranteed laser damage thresholds specific to the design wavelength. TECHSPEC® Fused Silica Wedge Prisms utilize a wedge design to deviate laser beam path from 0.5° – 5°. By creating a risley prism pair using two wedge prisms with the same ray deviation, custom beam steering up to two times the wedge deviation is possible. A low coefficient of thermal expansion ensures accurate beam steering in high power laser applications.

**Note:** Power Diopter is defined as 1cm deviation at a distance of 1m from the prism. TECHSPEC® Wedge Prisms are also available in [N-BK7 versions](#).

## Technical Information

## Related Products



Rotation Kinematic Mounts

## Frequently Purchased Together



#33-431 - 25mm Dia, 0 - 26° Risley Prism Mount  
₹48,225

Qty




#67-676 - 50mm Dia. x 200mm FL, NIR II Coated, Double-Convex Lens  
₹7,567

Qty



#68-003 - 50mm Diameter x -100 FL, NIR II Coated, Plano-Concave Lens  
₹7,517

Qty

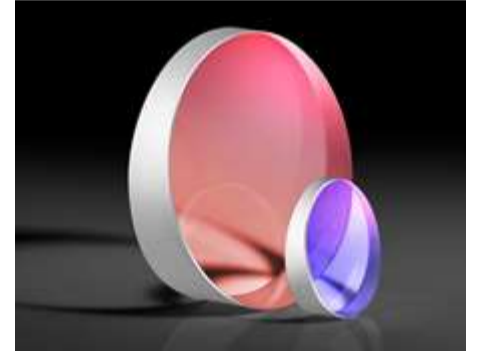

#39-080 - 25mm Dia. 0.5° Beam Dev. Fused Silica Wedge Prism 355nm Laser V-Coat  
₹10,828

Qty



## Resources

### Media Type

- Application Note
- Video
- FAQ
- Glossary

APPLICATION NOTE

Anti-Reflection (AR) Coatings

APPLICATION NOTE

An Introduction to Optical Coatings

APPLICATION NOTE

UV vs. IR Grade Fused Silica

VIDEO

Optical Prisms Review

FAQ

I'd like to adhere two prisms together. ho...

GLOSSARY

Dove Prism

View More

