

[See all 12 Products in Family](#)

## 25mm Dia., 3mm Thick, Zinc Selenide (ZnSe) Diffuser



IR Calcium Fluoride (CaF2) Diffusers

Stock #72-636 **NEW** 5 In Stock

- 1 + MRP ₹34,101

Price inclusive of all taxes

**ADD TO CART**

### Volume Pricing

Qty 1-5	₹34,101 each
Qty 6-25	₹27,342 each
Qty 26+	₹25,626 each
Need More?	<a href="#">Request Quote</a>

### Product Downloads

### General

IR Diffuser **Type:**

Fine Grind S1 to 180 grit, Polished S2 **Note:**

### Physical & Mechanical Properties

Clear Aperture CA (mm):

22.5 Specified for S2

25.00 ±0.01 **Diameter (mm):**

Fine Ground **Edges:**

3.00 ±0.10 **Thickness (mm):**

<1 arcmin **Parallelism (°):**

Protective as needed **Bevel:**

## Optical Properties

Uncoated **Coating:**

ZnSe **Substrate:**

600 - 12000 **Wavelength Range (nm):**

80-50 Specified for S2 **Surface Quality:**

S1: N/A S2: λ/2 **Surface Accuracy, P-V:**

## Regulatory Compliance

[View](#) **Certificate of Conformance:**

United States **Country of Origin:**


**Imported By:**  
Edmund Optics India Private Limited  
267, Greystone Building, Second Floor,  
6th Cross Rd, Binnamangala,  
Stage 1, Indiranagar, Bengaluru,  
Karnataka, India 560038  
Phone: +91-80-6845 0000

## Product Details

- Evenly Ground First Surface for Even Diffusion
- Low Index of Refraction Maximizes Throughput
- Broad Transmission Range

IR Diffusers feature an evenly fine ground first surface to produce even diffusion in the visible (VIS) and infrared (IR) spectra. Available in both ZnSe and CaF<sub>2</sub> options with transmission ranges of 600nm-12000nm and 300nm-7000nm respectively, these diffusers can be used with a variety of coherent and incoherent light sources. The low index of refraction of calcium fluoride maximizes the throughput of these diffusers without use of an antireflection (AR) coating. IR Diffusers are ideal for use in laser calibration systems and general diffusion of VIS - IR light sources.

## Technical Information

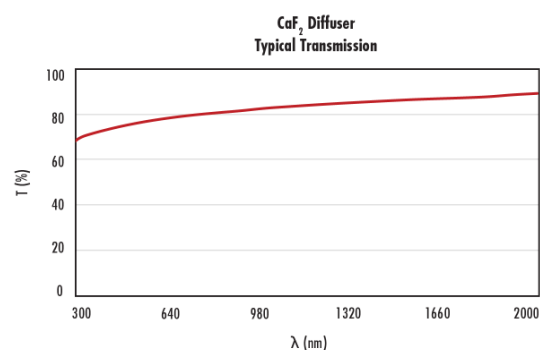

## Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools

