

**TECHSPEC® 25mm Dia x 25mm FL Acylinder Lens, MgF<sub>2</sub> Coated**



TECHSPEC Acylinder Lenses

Stock **#86-037** **3 In Stock**

1 MRP ₹98,065

Price inclusive of all taxes

**ADD TO CART**

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-5        | ₹98,065 each                  |
| Qty 6-25       | ₹78,190 each                  |
| Qty 26-49      | ₹72,137 each                  |
| Need More?     | <a href="#">Request Quote</a> |

Product Downloads

**General**

Acylinder Lens **Type:**

**Physical & Mechanical Properties**

25.00 +0.0/-0.1 **Diameter (mm):**

**Center Thickness CT (mm):**

8.00

Center Thickness Tolerance (mm):

±0.1

Clear Aperture (%):

90.00

Edge Thickness ET (mm):

3.1

### Optical Properties

Effective Focal Length EFL (mm):

25.00

Substrate:

N-SF5

f#:

1.00

Numerical Aperture NA:

0.50

Coating:

MgF<sub>2</sub> (400-700nm)

Wavelength Range (nm):

400 - 700

Back Focal Length BFL (mm):

20.2

Coating Specification:

R<sub>avg</sub> ≤ 1.75% @ 400 - 700nm

Focal Length Specification Wavelength (nm):

587.6

Surface Accuracy, RMS (µm):

1.0

Surface Quality:

60-40

### Regulatory Compliance

RoHS 2015:

Compliant

Certificate of Conformance:

[View](#)

Reach 235:

Compliant

Country of Origin:

United States


Imported By:

Edmund Optics India Private Limited  
267, Greystone Building, Second Floor,  
6th Cross Rd, Binnamangala,  
Stage 1, Indiranagar, Bengaluru,  
Karnataka, India 560038  
Phone: +91- 80-6845 0000

## Product Details

- Diffraction Limited Design
- Ideal for Creating Thin Line Profiles of Monochromatic Light Sources
- Focus Light in Single Dimension

TECHSPEC® Acylinder Lenses are similar to aspheric lenses in that they provide diffraction-limited focusing performance in only one dimension. By reducing spherical aberration along the focusing axis, TECHSPEC® Acylinder Lenses are ideal for creating thin line profiles. Compared to standard cylinder lenses, TECHSPEC® Acylinder Lenses also dramatically reduce the spot size of monochromatic light sources to provide sharp, thin lines.

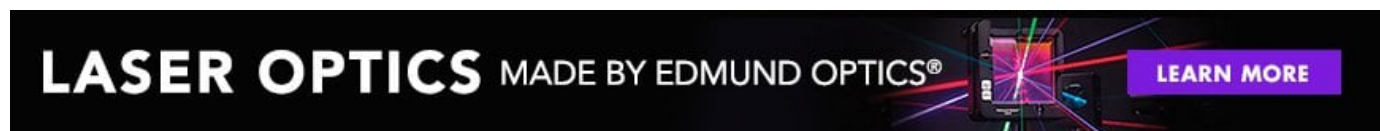

## Technical Information



## Coating Curves