


[See all 9 Products in Family](#)

TECHSPEC® 25mm Dia x 50mm FL BBAR (1650-3000nm) Coated, Si Aspheric Lens

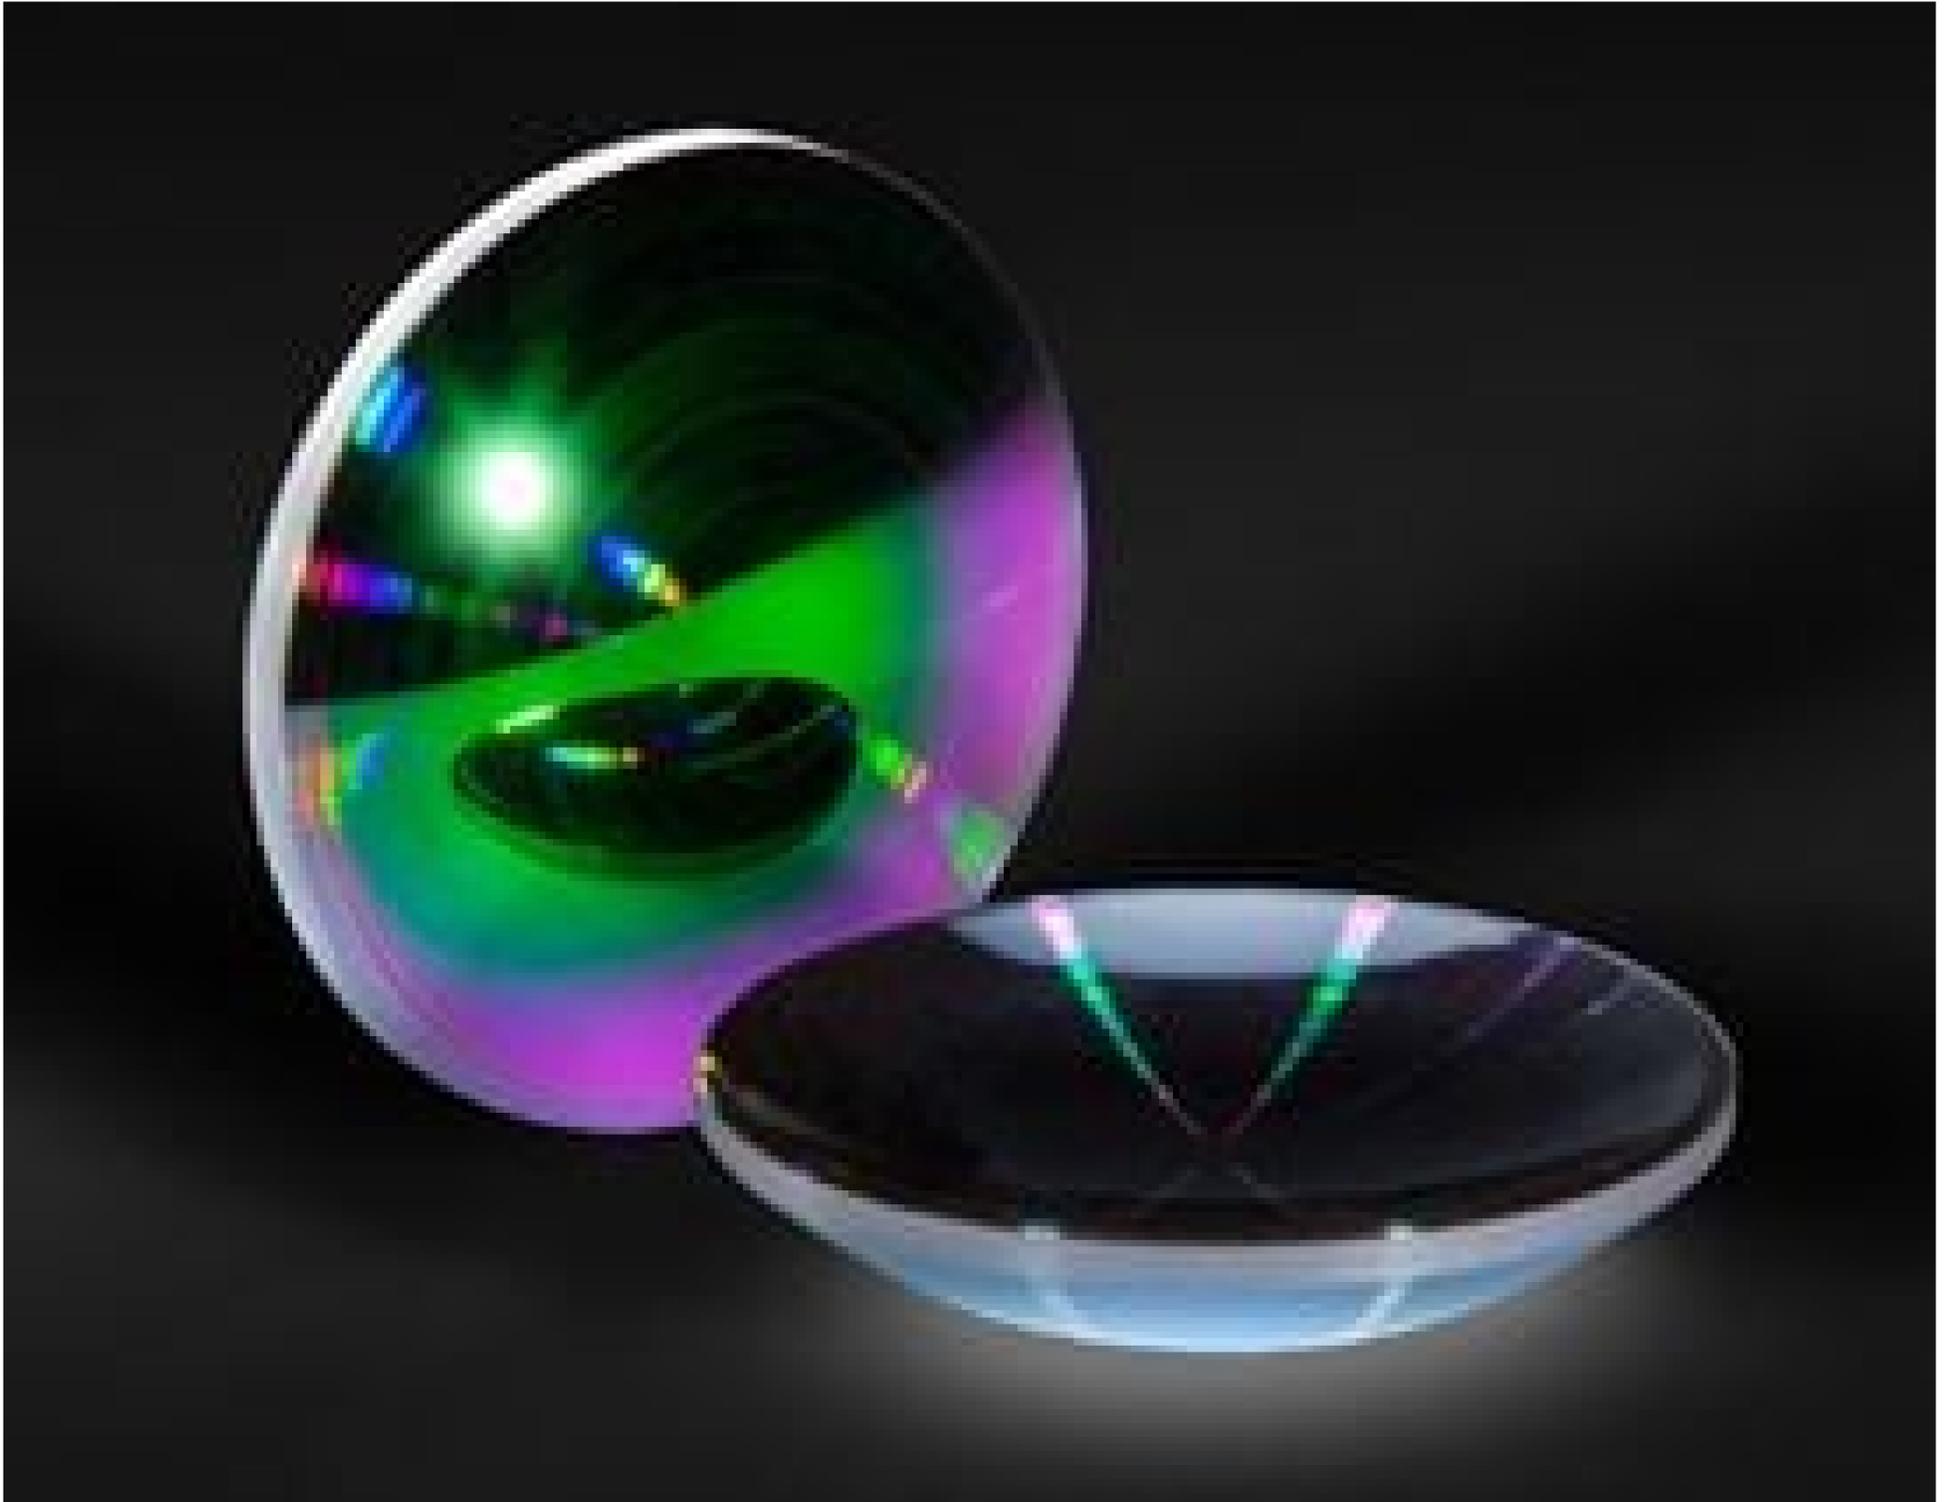

Stock #24-290 **5 In Stock**

⊖ 1 ⊕ ₹50,603

ADD TO CART

Volume Pricing	
Qty 1-5	₹50,603 each
Qty 6+	₹40,482 each
Need More?	Request Quote

Product Downloads

Physical & Mechanical Properties

25.00 +0.00/-0.10 **Diameter (mm):**

≤10 **Centering (arcmin):**

<21.8 **Centering, ETD (μm):**

22.5 **Clear Aperture CA (mm):**

Edge Thickness ET (mm):

2.3

Center Thickness CT (mm):
3.00 ±0.10

Bevel:
Protective as needed

Edges:
Diamond Turned

Shape of Back Surface:
Concave

Optical Properties

Effective Focal Length EFL (mm):
50.00 @4000nm

Numerical Aperture NA:
0.25

Back Focal Length BFL (mm):
47.78

Substrate:
Silicon (Si)

Asphere Figure Error, RMS @ 632.8nm:
λ/6

Coating:
BBAR (1650-3000nm)

Coating Specification:
R_{avg} <1% @ 1650 - 3000nm
R_{abs} <2% @ 1650 - 3000nm

Surface Accuracy, P-V (μm):
<0.3

Surface Quality:
60-40

f#:
2.00

Radius R₂ (mm):
75.698

Wavelength Range (nm):
1650 - 3000

Conjugate Distance:
Infinite

Regulatory Compliance

RoHS 2015:
[Compliant](#)

Certificate of Conformance:
[View](#)

Reach 235:
[Compliant](#)

Country of Origin:
United States

Imported By:
Edmund Optics India Private Limited

Product Details

- Diffraction-Limited Performance
- Low Density and Dispersion
- Ideal for Weight Sensitive IR Applications
- Available with BBAR (1650-3000nm) or Mid-Wave Infrared (3000-5000nm) AR Coatings

TECHSPEC® Silicon Aspheric Lenses are high performance, lightweight solutions for BBAR and Mid-Wave Infrared (MMIR) applications and are ideal alternatives for costly ZnSe lenses and brittle Germanium lenses. These lenses are available with efficient broadband AR coatings for the BBAR (1650-3000nm) or MMIR (3000-5000nm) spectral regions. TECHSPEC Silicon Aspheric Lenses feature the mechanical and thermal properties required to withstand many of the effects of harsh environments including fluctuations in temperature and pressure. Because silicon is a low density material, these lenses are also ideal for weight-sensitive systems, such as those found in many defense applications.