


[See all 7 Products in Family](#)

3" x 3" Negative, USAF 1951 Target

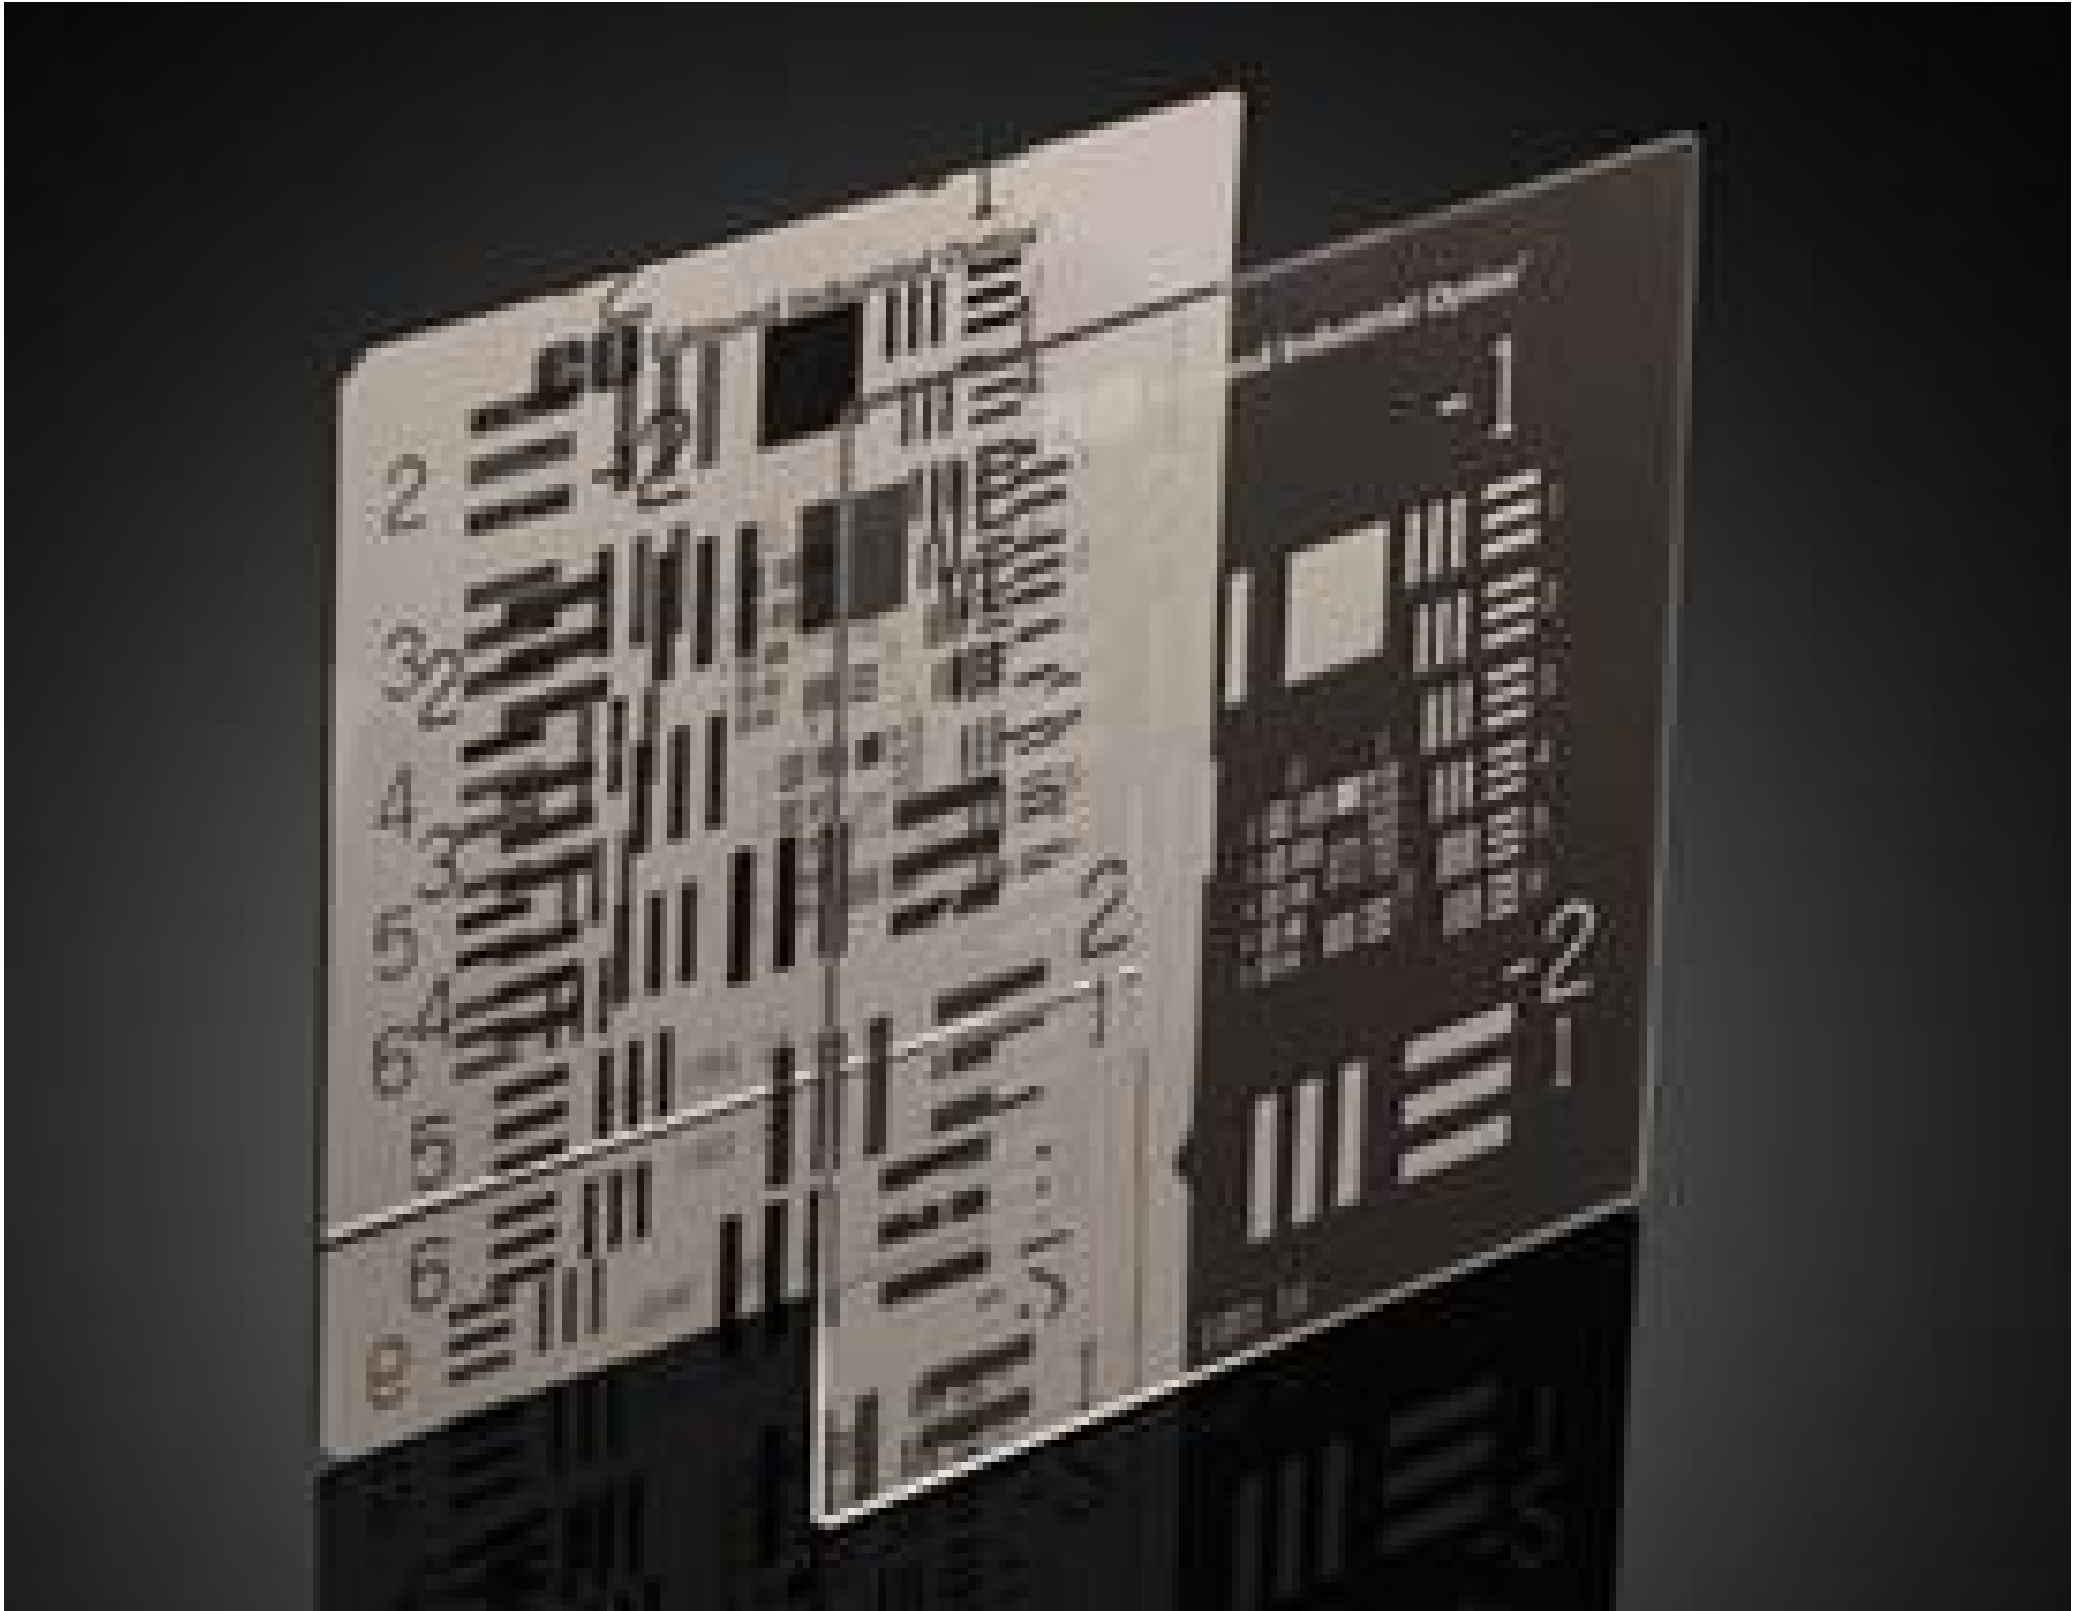

UV Fused Silica and Fluorescent USAF 1951 Resolution Targets

Stock #57-897 CLEARANCE 2 In Stock

MRP ₹48,533

📌 Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-4	₹48,533 each
Qty 5+	₹46,197 each
Need More?	Request Quote

Product Downloads

General

Negative Target **Type:**

Physical & Mechanical Properties

3x3 **Dimensions (inches):**

1.00 **Thickness (mm):**

Optical Properties

Coating:
Vacuum Deposited Durable Chromium

Substrate:
[UV Fused Silica](#) (Coming 7980)

Optical Density OD (Average):
>3.0

Resolution:
Minimum: Group -2, Element 1, Maximum: Group 7, Element 6

Surface Quality:
20-10

Surface Flatness (P-V):
2λ

Regulatory Compliance

RoHS 2015:
[Compliant](#)

Certificate of Conformance:
[View](#)

Reach 240:
[Compliant](#)

Country of Origin:
United States

Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91-80-6845 0000

Product Details


- Designed for Calibration of UV or Fluorescence Microscopes
- Fluorescent Targets have 365nm Excitation Wavelength, 550nm Emission Wavelength
- Negative and Positive Targets Available

The Fused Silica Positive Target (chrome pattern, clear background) has the chrome pattern deposited on the top surface of the target, as does the Fused Silica Negative Target (clear pattern, chrome background).

The Fluorescent Fused Silica Targets are ideal for applications involving fluorescence and confocal microscopy, nanotechnology, photolithography, and other UV-based imaging systems. The Fluorescent Fused Silica Positive Target (chrome pattern, clear background) has a fluorescent material on the top surface of the target. The Fluorescent Fused Silica Negative Target (clear pattern, chrome background) has a fluorescent material on the bottom surface.

Note: Chrome coated top surface will reflect UV radiation. Avoid direct skin contact and eye exposure to UV energy. [UV protective eyewear](#) sold separately. Fluorescent material adds 0.1 - 0.2mm to thickness of fluorescent targets.

Technical Information

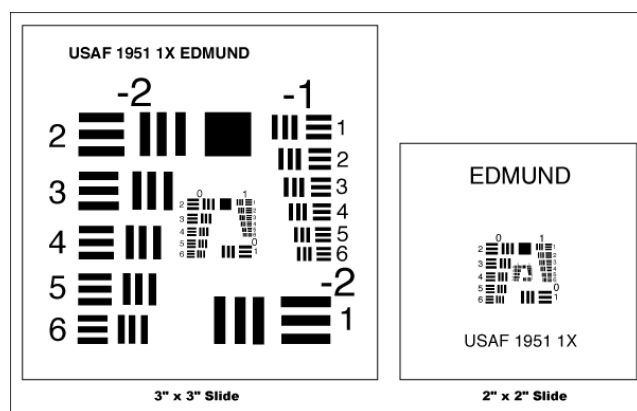

Element	Group Number										For High Res only	
	-2	-1	0	1	2	3	4	5	6	7	8	9
1	0.250	0.500	1.00	2.00	4.00	8.00	16.00	32.0	64.0	128.0	256.0	512.0
2	0.280	0.561	1.12	2.24	4.49	8.98	17.95	36.0	71.8	144.0	287.0	575.0
3	0.315	0.630	1.26	2.52	5.04	10.10	20.16	40.3	80.6	161.0	323.0	645.0
4	0.353	0.707	1.41	2.83	5.66	11.30	22.62	45.3	90.5	181.0	362.0	—
5	0.397	0.793	1.59	3.17	6.35	12.70	25.39	50.8	102.0	203.0	406.0	—
6	0.445	0.891	1.78	3.56	7.13	14.30	28.50	57.0	114.0	228.0	456.0	—