


## 35µm Aperture Diameter, Molybdenum Aperture

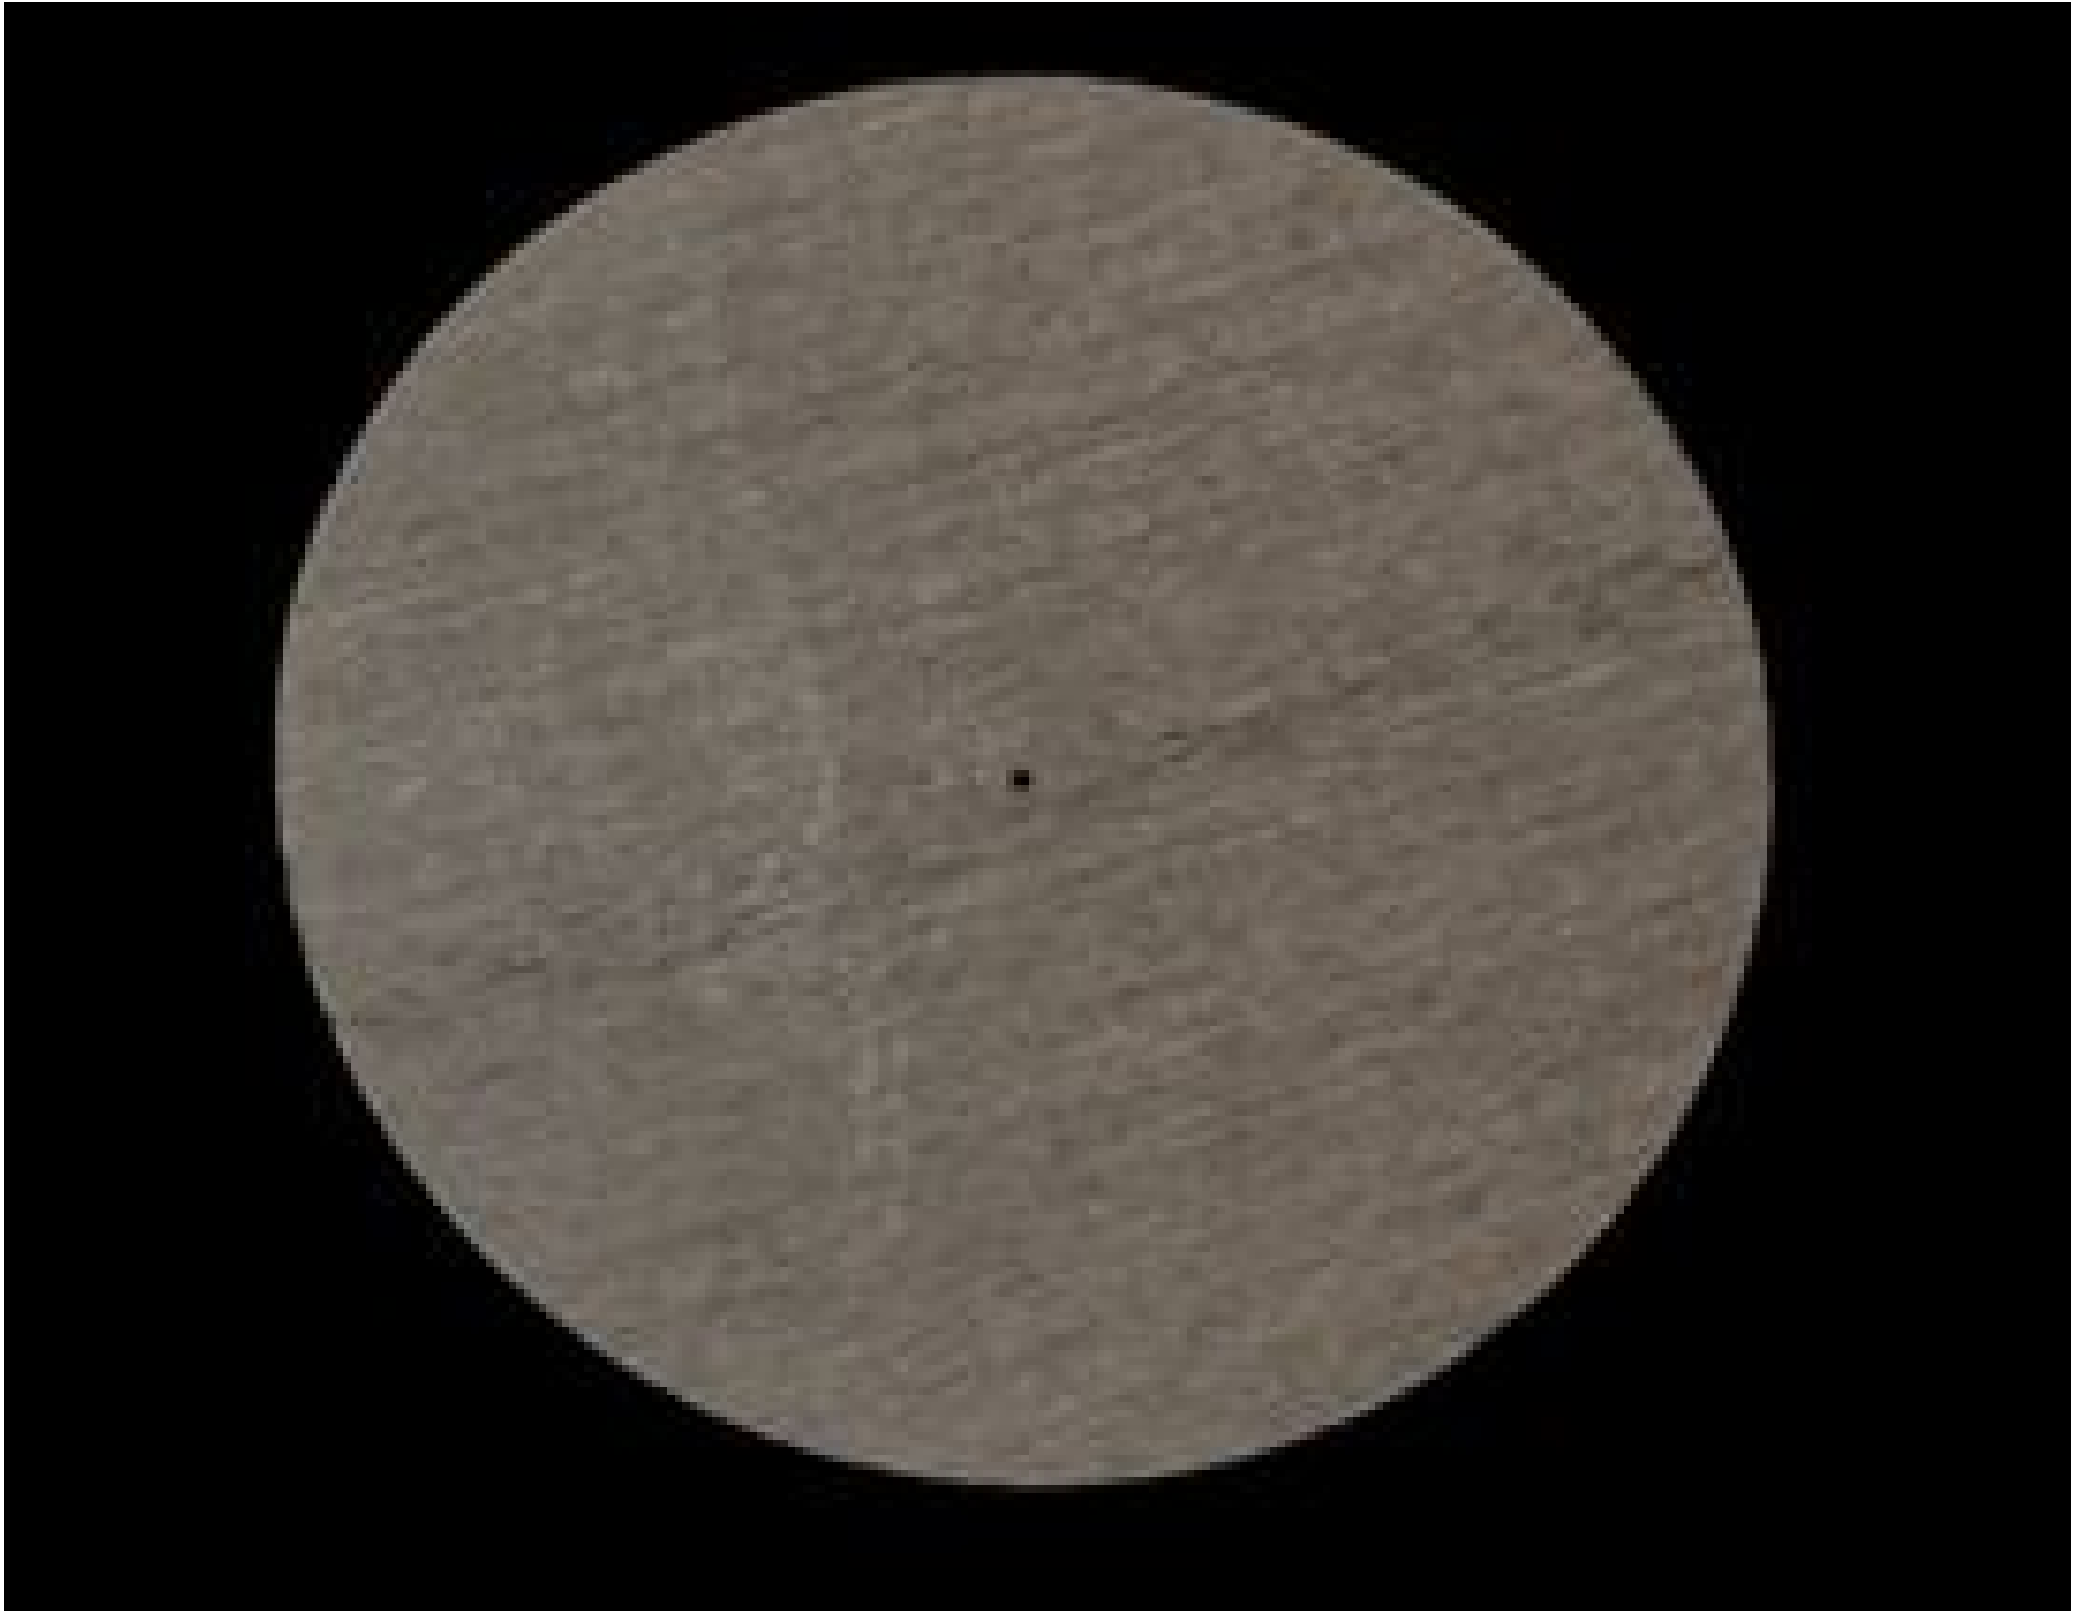

Molybdenum Aperture

Stock #59-256 **14 In Stock**

MRP ₹13,217

Price inclusive of all taxes

**ADD TO CART**

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-5        | ₹13,217 each                  |
| Qty 6-10       | ₹11,693 each                  |
| Qty 11+        | ₹10,805 each                  |
| Need More?     | <a href="#">Request Quote</a> |

Product Downloads

### Physical & Mechanical Properties

Outer Diameter (mm):  
9.5

Construction:  
Molybdenum

Fixed Aperture Diameter (µm):  
35.00

Thickness (mm):

0.05 Nominal

**Aperture Tolerance (%):**

±6

**Aperture Centration (µm):**

±125

## Regulatory Compliance

**RoHS 2015:**

[Compliant](#)

**Certificate of Conformance:**

[View](#)

**REACH 241:**

[Compliant](#)

**Country of Origin:**

United States

**Imported By:**  
Edmund Optics India Private Limited  
267, Greystone Building, Second Floor,  
6th Cross Rd, Binnamangala,  
Stage 1, Indiranagar, Bengaluru,  
Karnataka, India 560038  
Phone: +91- 80-6845 0000

## Product Details

- Ceramic, Copper, Gold-Plated Copper, Molybdenum, or Tungsten Substrates
- Withstand High Power Densities up to 130MW/cm<sup>2</sup> (For Mo and W Substrates)
- Ideal for Spatial Filtering and Laser Aperturing

High Power Apertures are available in an assortment of available substrates, making them a versatile option for a variety of laser applications. These products are ideal for spatial filtering and as a general aperture. The apertures have an outer diameter of 3/8" (9.5mm). High Power Apertures have one shiny side for high reflectivity while the other is blackened for absorption. The ceramic apertures are white on both sides. The aperture's thickness and the materials' high reflectivity enable them to withstand and quickly dissipate increased irradiation from high-energy lasers. Densities as high as 100MW/cm<sup>2</sup> (130MW/cm<sup>2</sup> for molybdenum and Tungsten substrates) have been used without damage to the apertures.

;