

[See all 24 Products in Family](#)

5.1µm Flat Top Beam Shaper | πShaper 12_12_5.1

See More by [AdlOptica](#)



#25-840: 5.1µm Flat Top Beam Shaper | πShaper 12_12_5.1

Stock **#25-840** CLEARANCE **1 In Stock**

MRP ₹9,33,877

1 Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-4	₹9,33,877 each
Qty 5+	₹8,31,599 each
Need More?	Request Quote

Product Downloads

General

πShaper 12_12_5.1	Model Number:
Beam Shaper	Type:
Flat Top	Style:

Physical & Mechanical Properties

271.00	Length (mm):
<300	Weight (g):
49.00	Diameter (mm):

Optical Properties

12	Entrance Beam Diameter, 1/e² (mm):
5100	Design Wavelength DWL (nm):
5000 - 5500	Wavelength Range (nm):
20m J/cm ² @ 5ns (typical)	Damage Threshold, By Design: <input type="checkbox"/>
12.0	Output Diameter, FWHM (mm):
20m J/cm ² @ 5ns (typical)	Damage Threshold, Pulsed:

Threading & Mounting

Input: M27 x 1 Output: M33 x 2	Mounting Threads:
-----------------------------------	--------------------------

Regulatory Compliance


Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 250:
Germany	Country of Origin:
Edmund Optics India Private Limited 267, Greystone Building, Second Floor, 6th Cross Rd, Binnamangala, Stage 1, Indiranagar, Bengaluru, Karnataka, India 560038 Phone: +91- 80-6845 0000	Imported By:

Product Details

- Convert Gaussian Beam Profile to Flat Top Profile
- Near 100% Efficiency
- No Internal Focusing Enables High Power Laser Input
- [AdlOptica Focal-πShaper Q Flat Top Beam Shapers](#) Also Available

AdlOptica πShaper (piShaper) Flat Top Beam Shapers are refractive field mapping optical systems that convert collimated Gaussian input beams into collimated flat top beams with a uniform intensity distribution and flat phase front. Due to the field mapping optical design, the even intensity distribution of the converted beam is stable over great distances making it ideally suitable for holography, microscopy, and system integration. With no internal focusing, they are also the perfect solution in applications such as material micromachining, welding, and engraving that require high power lasers. These AdlOptica πShaper Flat Top Beam Shapers are offered in common YAG, fiber laser, and CO2 laser sources, operating over a defined wavelength range for laser tuning. Achromatic versions are designed to be used with multiple laser sources.

Note: Focusing a flat-top beam after a πShaper results in loss of the flat top profile. [AdlOptica Focal-πShaper Q Flat Top Beam Shapers](#) are available for applications that require a focused flat top spot.

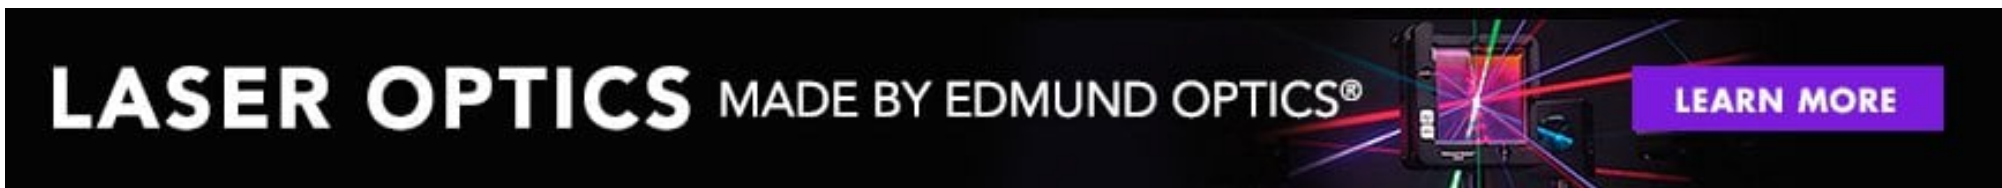

Technical Information

Example of beam shaping for TEM₀₀ Laser

