

TECHSPEC® 5mm 532nm, Laser Line Non-Polarizing Cube Beamsplitter



Laser Line Non-Polarizing Cube Beamsplitters



Stock #35-958 **5 In Stock**

⊖ 1 ⊕ MRP ₹26,635

● Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-5	₹26,635 each
Qty 6-25	₹21,389 each
Qty 26-99	₹19,674 each
Need More?	Request Quote

Product Downloads

General

Non-Polarizing Beamsplitter **Type:**

Physical & Mechanical Properties

Bevel:

Protective as needed

90 **Clear Aperture (%):**

Cube **Construction:**

5.0 x 5.0 x 5.0 ± 0.1 **Dimensions (mm):**

Optical Properties

±2 **Beam Deviation (arcmin):**

<0.25% Reflection on Entrance and Exit Faces **Coating Specification:**

532 **Design Wavelength DWL (nm):**

±5 **Reflection/Transmission Tolerance (%):**

N-BK7 **Substrate:**

40-20 **Surface Quality:**

<45% ±5% @ DWL **Transmission (%):**

<3% @ DWL **|Ts-Tp|:**

1.50 **Power (fringes) @ 632.8nm:**

0.25 **Irregularity (fringes) @ 632.8nm:**

Regulatory Compliance

Compliant **RoHS 2015:**

Compliant **Reach 219:**

View **Certificate of Conformance:**


Singapore **Country of Origin:**

Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91- 80-6845 0000

Product Details


- <3% Transmission Difference for S and P Polarization States
- AR Coated <0.25% on Entrance and Exit Faces
- Nd:YAG and HeNe Options

TECHSPEC® Laser Line Non-Polarizing Cube Beamsplitters offer users the ability to split light evenly into orthogonal paths regardless of the incoming polarization state. These cubes are designed with a metallic-dielectric hybrid coating that yields less than a 3% difference in transmission for S-polarized and P-polarized light. These cubes are compatible with common Nd:YAG and HeNe lasers and are available with three beamsplitter coating options at 1064nm, 632nm, and 532nm. Efficiency is enhanced with AR coatings on the entrance and exit faces featuring <0.25% reflection per surface. TECHSPEC® Laser Line Non-Polarizing Cube Beamsplitters will displace a beam by less than 2 arcmin, making them easy to integrate into alignment sensitive applications.

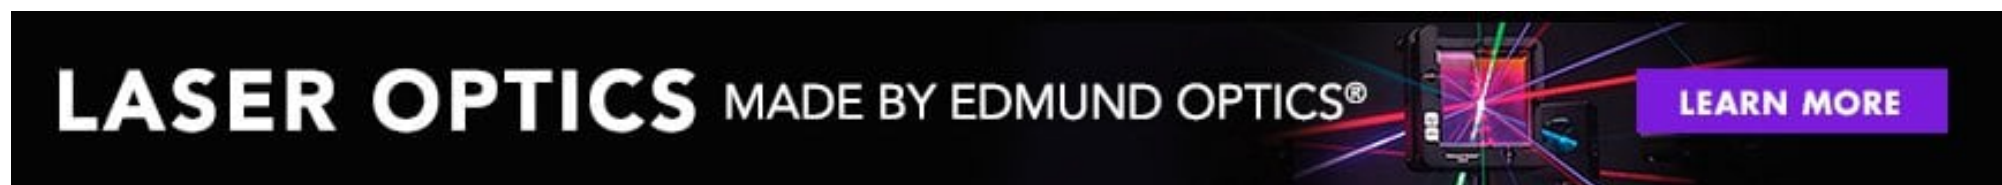


Technical Information

532nm

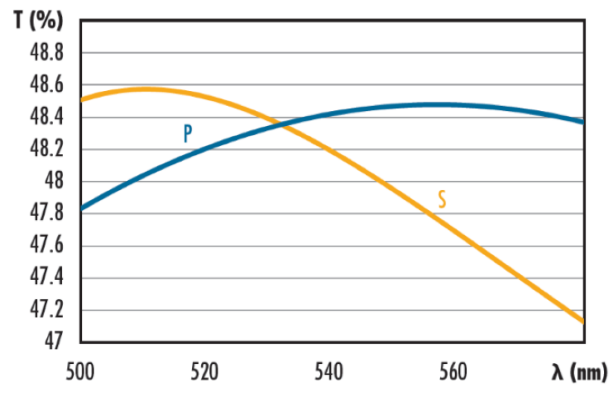

632.8nm

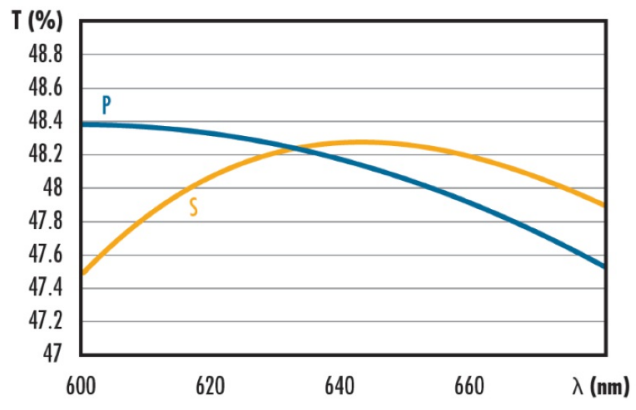

1064nm

