

[See all 20 Products in Family](#)

TECHSPEC® 5mm Dia. 355nm Laser V-Coat, $\lambda/20$ Fused Silica Window



Uncoated $\lambda/20$ Fused Silica Window

Stock #65-852 [CONTACT US](#)

1 MRP ₹15,335

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-5	₹15,335 each
Qty 6-25	₹13,721 each
Qty 26-49	₹12,107 each
Need More?	Request Quote

Product Downloads

General

Laser Line Window **Type:**

Glass **Type of Window:**

Physical & Mechanical Properties

Clear Aperture CA (mm):

4.50	Diameter (mm):
5.00 +0.00/-0.10	
	Thickness (mm):
3.00 ±0.10	
	Bevel:
Protective as needed	
	Clear Aperture (%):
90	
	Edges:
Fine Ground	
	Parallelism (arcsec):
≤5	
	Poisson's Ratio:
0.16	
	Young's Modulus (GPa):
73	
	Knoop Hardness (kg/mm²):
522.00	

Optical Properties

	Angle of Incidence (°):
0	
	Coating:
Laser V-Coat (355nm)	
	Design Wavelength DWL (nm):
355	
	Substrate: <input type="checkbox"/>
Fused Silica Excimer Grade (Corning 7980 KrF)	
	Index of Refraction (n_d):
1.458	
	Surface Quality:
10-5	
	Transmitted Wavefront, P-V:
λ/20	
	Abbe Number (v_d):
67.8	
	Coating Specification:
R _{abs} <0.25% @ 355nm	
	Damage Threshold, By Design: <input type="checkbox"/>
4 J/cm ² @ 10ns	

Material Properties

	Density (g/cm³):
2.20	
	Coefficient of Thermal Expansion CTE (10⁻⁶/°C):
0.52 (+5 to +35°C)	
0.57 (0 to +200°C)	
0.48 (-100 to +200°C)	
	Fused Silica Grade:
7980 KrF 0A	

Regulatory Compliance

	RoHS 2015:
Compliant	
	REACH 201:
Compliant	
	Certificate of Conformance:
View	
	Country of Origin:
United States	
	Imported By:
Edmund Optics India Private Limited 267, Greystone Building, Second Floor, 6th Cross Rd, Binnamangala, Stage 1, Indiranagar, Bengaluru, Karnataka, India 560038 Phone: +91- 80-6845 0000	

Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more


- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).


Product Details

- $R < 0.25\%$ for 266nm, 355nm, 532nm or 1064nm
- Low Auto-Fluorescence
- Damage Thresholds up to $10 \text{ J/cm}^2 @ 10\text{ns}$ @ 1064nm

TECHSPEC® X20 High Power Laser Line Windows features a high efficiency, high damage threshold V-coating to maximize transmission at the design wavelength. Damage thresholds ranging from 2 - 10 J/cm^2 allow easy integration into most Nd:YAG laser systems. The coating is deposited on a precision excimer grade UV grade fused silica substrate for excellent thermal stability, low wavefront distortion, and ultra-low auto-fluorescence. TECHSPEC® X20 High Power Laser Line Windows are available in diameters ranging from 5 to 50mm. For custom options or wedged versions, please contact our [Sales Department](#).

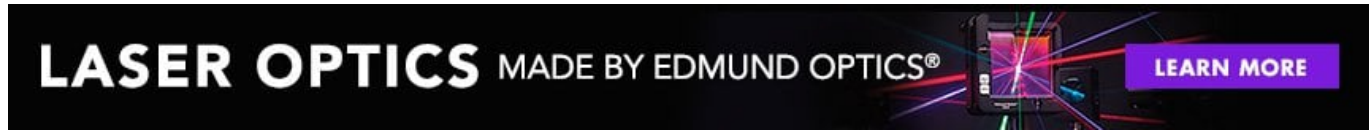

Technical Information

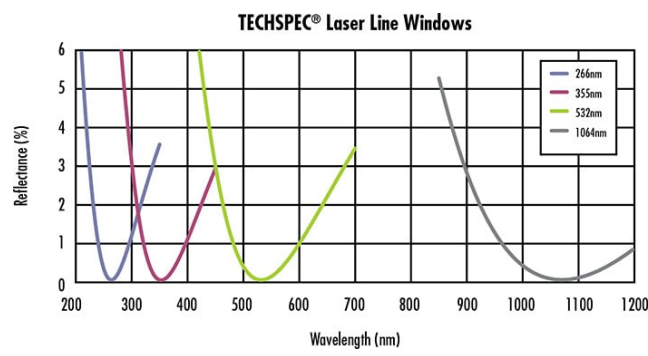

Compatible Mounts