

[See all 10 Products in Family](#)

5mm FL, f/2.8, Low Distortion M12 Lens



5mm FL, Low Distortion M12 Lens

Stock **#75-214** NEW [CONTACT US](#)

1 MRP ₹25,564

Price inclusive of all taxes

[ADD TO CART](#)

Volume Pricing

Qty 1+	₹25,564 each
Need More?	Request Quote

Product Downloads

General

Product Family:
Ultra Low Distortion Wide Angle Lenses

Imaging Lens Type:
M12 Imaging Lens

Physical & Mechanical Properties

Iris Option:
Fixed

Length (mm):
29.90

21.5	Maximum Diameter (mm):
21.5	Outer Diameter (mm):
12	Weight (g):
29.90	Maximum Length (mm):

Optical Properties

59.8°	Horizontal Field of View @ Max Sensor Format:
Horizontal: 59.8° Vertical: 46.2° Diagonal: 71.8°	Field of View at Max Sensor Format:
9.00	Maximum Image Circle (mm):
5.00	Focal Length FL (mm):
100 - ∞	Working Distance (mm):
f/2.8	Aperture (f/#):
-0.51	Maximum Distortion (%):
-25.4	Exit Pupil Position (mm):
VIS	Lens Wavelength Range:

Sensor

1/1.8"	Optimized Sensor Format:
1/1.8"	Maximum Sensor Format:

Threading & Mounting

S-Mount (M12 x0.5)	Mount:
--------------------	---------------

Environmental & Durability Factors

-20 to +60	Storage Temperature (°C):
------------	----------------------------------

Regulatory Compliance


View	Certificate of Conformance:
Japan	Country of Origin:
Edmund Optics India Private Limited 267, Greystone Building, Second Floor, 6th Cross Rd, Binnamangala, Stage 1, Indiranagar, Bengaluru, Karnataka, India 560038 Phone: +91- 80-6845 0000	Imported By:

Product Details


- Distortion as low as -0.02%
- Up to 1/1.8", S-Mount Options
- 1.7mm - 5mm Focal Lengths

Ultra Low Distortion Wide Angle Lenses are designed to achieve less than -0.02% distortion over a 76.9° field of view, less than -0.32% distortion over a 109.1° field of view, or less than -0.51% distortion over a 59.8° field of view. The ultra-low distortion values of these lenses ensure imaging with straight lines and natural object shapes, helping to reduce post-processing requirements. These lenses offer high transmission from the VIS to NIR and are available in focal lengths of 1.70, 3.00, and 5.00mm. Ultra Low Distortion Wide Angle Lenses' low focal lengths allow for capturing more of the scene in a single frame. These lenses are ideal for surveillance, security, robotics, drive assistance systems, and [factory automation applications](#).


Technical Information

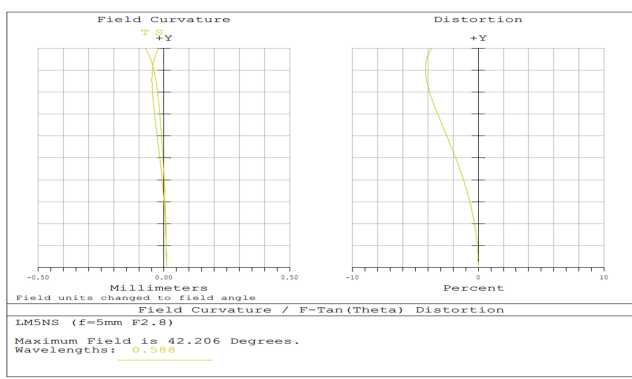


5mm FL, f/2.8, Low Distortion M12 Lens, Distribution Plot

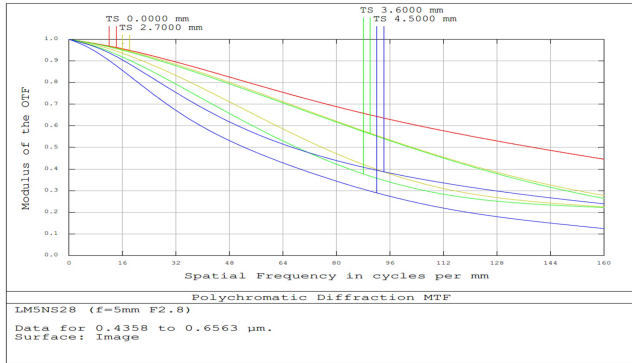

5mm FL, f/2.8, Low Distortion M12 Lens, MTF Plot

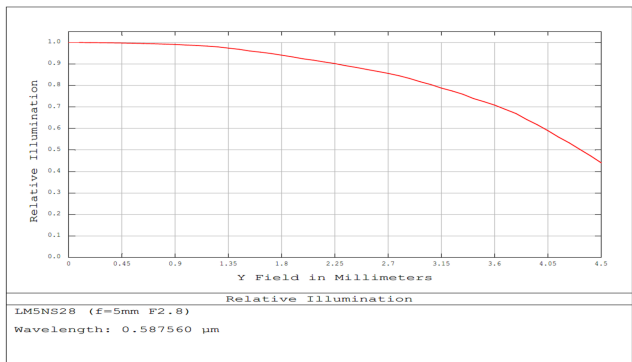

5mm FL, f/2.8, Low Distortion M12 Lens, Relative Illumination Plot

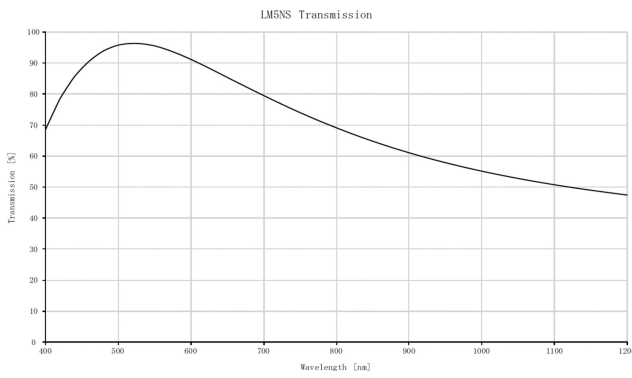

5mm FL, f/2.8, Low Distortion M12 Lens, Transmission Plot