

[See all 13 Products in Family](#)

**TECHSPEC® 6mm Dia. x -9mm FL, MgF<sub>2</sub> Coated, Double-Concave Lens**



Stock **#48-935** **20+ In Stock**

[Other Coating Options](#)

1  MRP ₹3,860

Price inclusive of all taxes

**ADD TO CART**

Volume Pricing	
Qty 1-9	₹3,860 each
Qty 10-25	₹3,481 each
Qty 26-49	₹3,077 each
Need More?	<a href="#">Request Quote</a>

Product Downloads

**General**

Double-Concave Lens **Type:**

**Physical & Mechanical Properties**

**Diameter (mm):**

6.00 +0.0/-0.025

Bevel:

Protective as needed

Center Thickness CT (mm):

1.00

Center Thickness Tolerance (mm):

±0.05

Centering (arcmin):

<3

Clear Aperture CA (mm):

5.4

Edge Thickness ET (mm):

1.79

## Optical Properties

Effective Focal Length EFL (mm):

-9.00

Substrate:

N-BK7

f#:

1.5

Numerical Aperture NA:

0.33

Coating:

MgF<sub>2</sub> (400-700nm)

Wavelength Range (nm):

400 - 700

Back Focal Length BFL (mm):

-9.32

Coating Specification:

R<sub>avg</sub> ≤ 1.75% @ 400 - 700nm

Focal Length Specification Wavelength (nm):

587.6

Focal Length Tolerance (%):

±1

Radius R<sub>1</sub>=R<sub>2</sub> (mm):

-9.47

Surface Quality:

40-20

Damage Threshold, By Design:

10 J/cm<sup>2</sup> @ 532nm, 10ns

Power (P-V) @ 632.8nm:

1.5λ

Irregularity (P-V) @ 632.8nm:

λ/4

## Regulatory Compliance

RoHS 2015:

Compliant

Certificate of Conformance:

[View](#)

Reach 235:

Compliant

Country of Origin:

Japan

Imported By:

Edmund Optics India Private Limited  
267, Greystone Building, Second Floor,  
6th Cross Rd, Binnamangala,  
Stage 1, Indiranagar, Bengaluru,  
Karnataka, India 560038  
Phone: +91- 80-6845 0000

## Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume



Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

## Product Details

- AR Coated to Provide  $<1.75\%$  Reflectance per Surface for 400 - 700nm
- Designed for  $0^\circ$  Angle of Incidence
- Various Coating Options: [Uncoated](#), [VIS-EXT](#), [VIS  \$0^\circ\$](#) , [VIS-NIR](#), [NIR I](#), and [NIR II](#)

TECHSPEC® MgF<sub>2</sub> Coated Double-Concave (DCV) Lenses are designed to have two inward curved surfaces and a negative focal length similar to Plano-Concave (PCV) lenses. These lenses can be used for balancing aberrations created by other lenses within a system due to their negative spherical aberration. Double-Concave (DCV) lenses are commonly used in a variety of applications including image reduction, beam expansion and telescopes. TECHSPEC® MgF<sub>2</sub> Coated Double-Concave (DCV) Lenses are ideal for broadband applications. These lenses are also available in [Uncoated](#), [VIS-EXT](#), [VIS  \$0^\circ\$](#) , [VIS-NIR](#), [NIR I](#), or with [NIR II](#) AR coating options.

## Technical Information

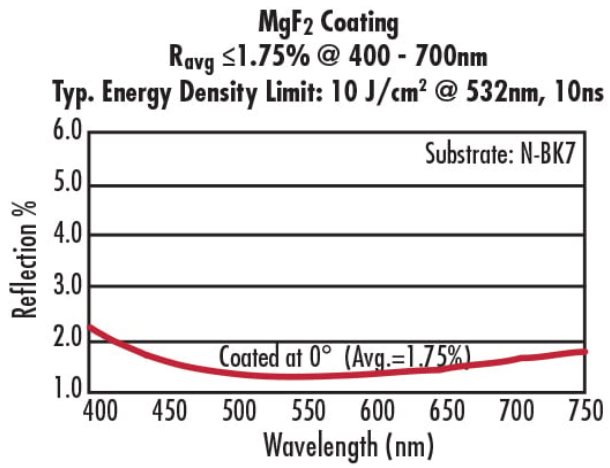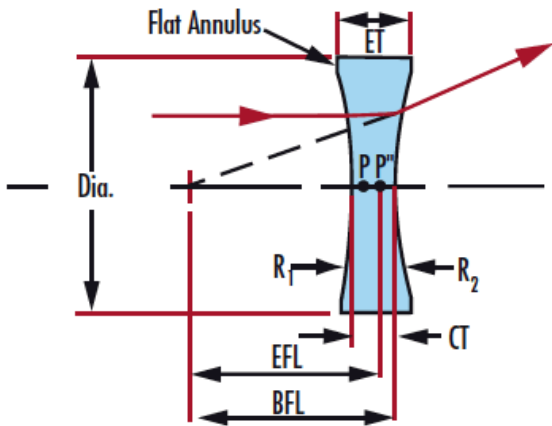

## Coating Curves

## Compatible Mounts