

[See all 22 Products in Family](#)

TECHSPEC® 980nm CWL, 12.5mm Dia, 3.7nm Bandwidth, OD 6 Laser Line Bandpass Filter



Stock **#68-952** **10 In Stock**

[Additional Bandwidths](#)

⊖ 1 ⊕ MRP ₹36,825

● Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-5	₹36,825 each
Qty 6-25	₹29,460 each
Need More?	Request Quote

Product Downloads

General

Bandpass Filter **Type:**

Physical & Mechanical Properties

12.50 **Diameter (mm):**

8.5 **Clear Aperture CA (mm):**

Optical Properties

0 ±2 **Angle of Incidence (°):**

3.7 **Bandwidth (nm):**

OD 5 Blocking Wavelength Range (nm) :
724.4 - 970.2 & 989.8 - 1332.6

OD 6 Blocking Wavelength Range (nm):
901.6 - 965.3 & 994.7 - 1078

≥6.0 **Optical Density OD (Average):**

980.00 **Center Wavelength CWL (nm):**

980 **Design Wavelength DWL (nm):**

6.90 **Full Width-Half Max FWHM (nm):**

Substrate:
Fused Silica (Coming 7980)

Coating:
Hard Coated

60-40 **Surface Quality:**

≥90 **Transmission (%):**

Transmitted Wavefront, RMS:
λ/4 @ 633nm

Threading & Mounting

3.5 **Mount Thickness (mm):**

Environmental & Durability Factors

Durability:
Environmental: ML-STD-810F, sect. 507.4
Durability: ML-C-48497A, sect. 3.4.1

Regulatory Compliance

RoHS 2015:
Compliant

Certificate of Conformance:
View

Reach 247:
Compliant

Country of Origin:
United States

Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91- 80-6845 0000

Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).


Product Details

- Over 90% Transmission at Design Wavelength
- Hard Coated Design
- Designed for Laser Applications


Available for use with common gas and solid state lasers, TECHSPEC OD 6 Laser Line Clean-Up Filters are designed to offer maximum transmission of stimulated emission, while eliminating noisy spontaneous emission. TECHSPEC OD 6 Laser Line Clean-Up Filters are ideal for laser-based fluorescence instrumentation, Raman spectroscopy, or for analytical or medical laser systems. Due to their steep edges, TECHSPEC Laser Line Clean-Up Filters are excellent complements to [TECHSPEC Notch Filters](#) or [TECHSPEC Raman Longpass Edge Filters](#).

Technical Information


532nm Laser Line Bandpass Filter

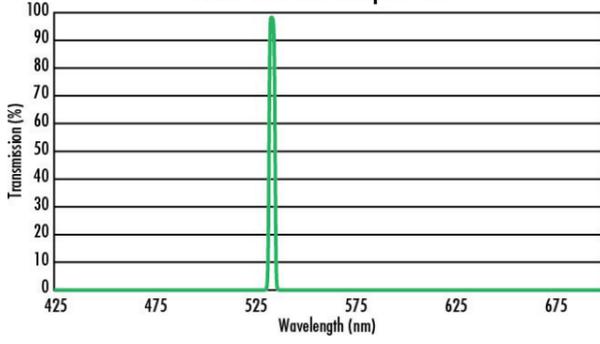

1064nm Laser Line Bandpass Filter

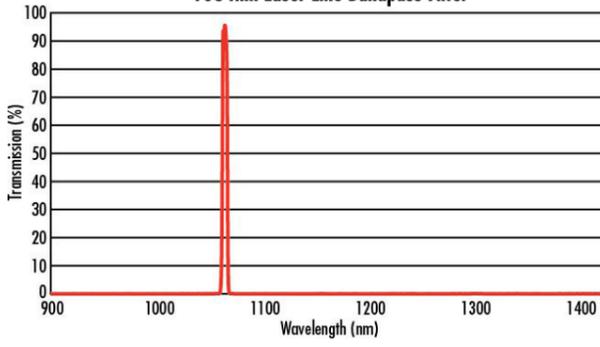

785nm Laser Line Bandpass Filter

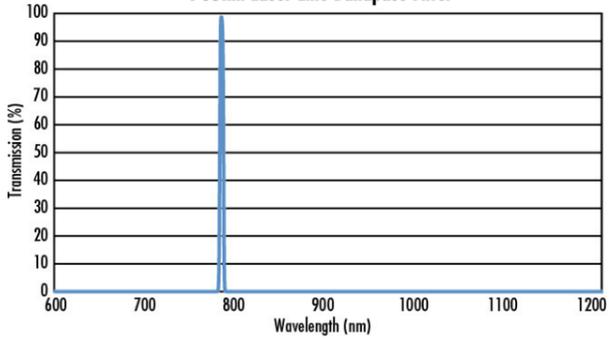

Compatible Mounts