

TECHSPEC[®] 9mm Dia. x 18mm FL VIS-EXT Coated, Double-Convex Lens



Stock **#89-138** 17 In Stock

☐ [Other Coating Options](#)

-

1

+

₹4,088

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-9	₹4,088 each
Qty 10-24	₹3,675 each
Qty 25-99	₹3,284 each
Need More?	Request Quote

Product Downloads

General

Type:
Double-Convex Lens

Physical & Mechanical Properties

Diameter (mm):

9.00 +0.000/-0.025	
Centering (arcmin):	<1
Bevel:	Protective as needed
Center Thickness CT (mm):	2.60
Center Thickness Tolerance (mm):	±0.05
Edge Thickness ET (mm):	1.47
Clear Aperture CA (mm):	8.1

Optical Properties	
Back Focal Length BFL (mm):	17.12
Effective Focal Length EFL (mm):	18.00
Coating:	VIS-EXT (350-700nm)
Coating Specification:	R _{avg} <0.5% @ 350 - 700nm
Substrate: 	N-BK7
Surface Quality:	40-20
Power (P-V) @ 632.8nm:	1.5λ
Irregularity (P-V) @ 632.8nm:	λ/4
Radius R ₁ =R ₂ (mm):	18.15
f#:	2.00
Focal Length Specification Wavelength (nm):	587.6
Focal Length Tolerance (%):	±1
Numerical Aperture NA:	0.25
Wavelength Range (nm):	350 - 700

Regulatory Compliance	
RoHS 2015:	Compliant
Certificate of Conformance:	View
Reach 235:	Compliant
Country of Origin:	Japan
Imported By:	Edmund Optics India Private Limited

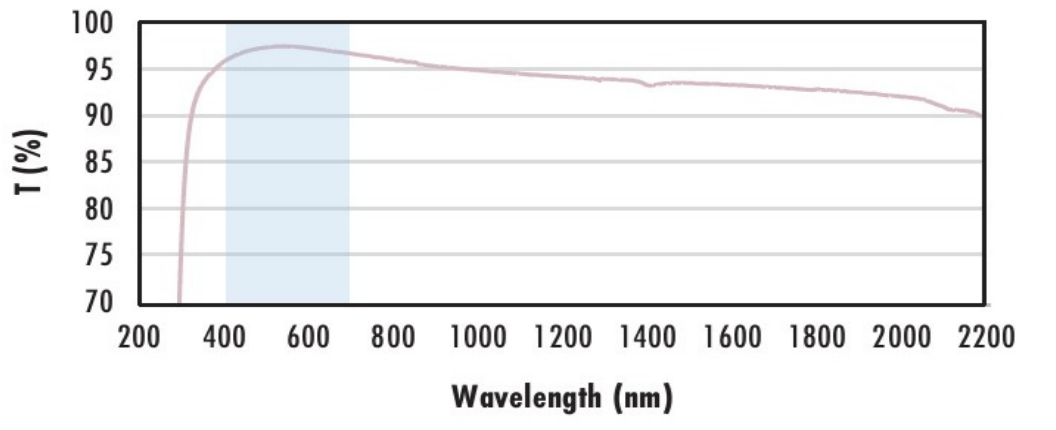
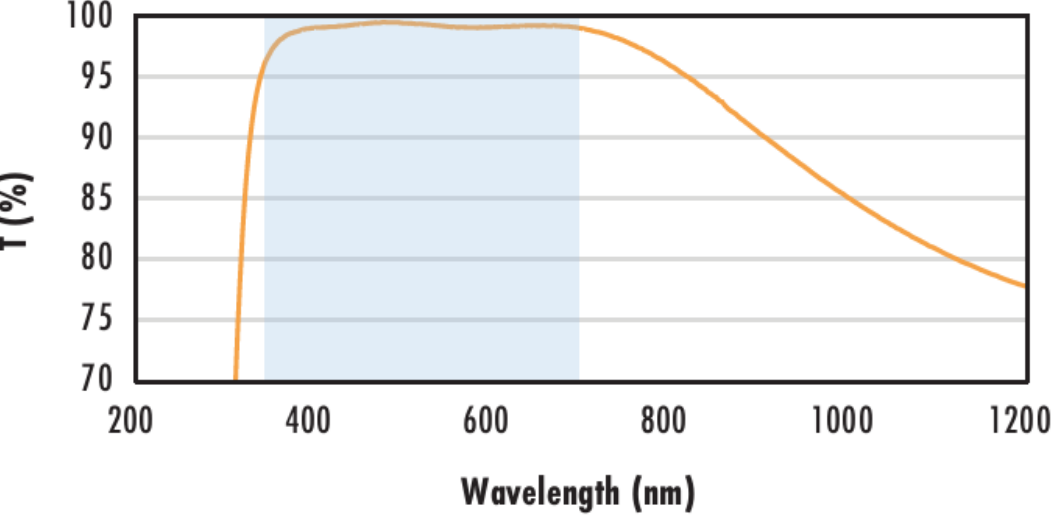
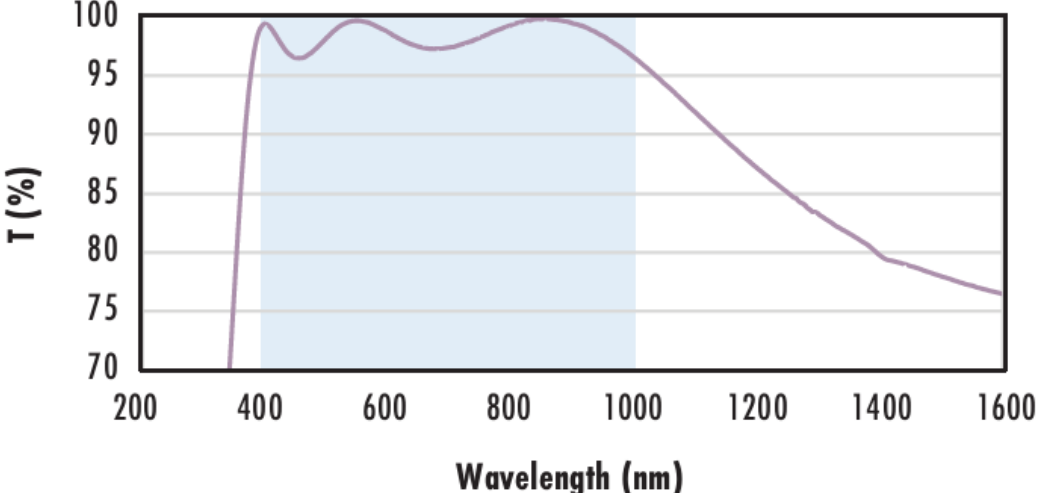
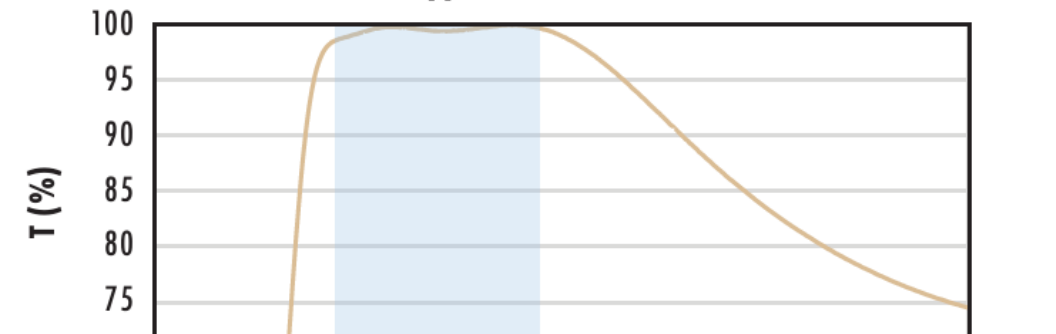
Product Details

- AR Coated to Provide <0.5% Reflectance per Surface for 350 - 700nm
- Mnimize Aberrations Including Spherical and Coma
- UV Fused Silica DCX Lenses Available
- Other Coating Options Available: Uncoated, MgF₂, VIS 0°, NIR I, NIR II, VIS-NIR, and YAG-BBAR

TECHSPEC® VIS-EXT Coated Double-Convex (DCX) Lenses, also referred to as bi-convex lenses, have two positive, symmetrical faces with equal radii on both sides. These lenses are generally recommended for finite imaging applications with a conjugate ratio (ratio between object distance and image distance) between 0.2 and 5. At a conjugate ratio of 1, aberrations such as spherical aberration, chromatic aberration, coma, and distortion are minimized or cancelled due to the symmetric lens design. TECHSPEC VIS-EXT Coated Double-Convex Lenses are available in a variety of substrates and coating options for the visible and NIR spectra.

Technical Information

N-BK7

Uncoated N-BK7 Typical Transmission 	Typical transmission of a 3mm thick, uncoated N-BK7 window across the UV - NIR spectra. Click Here to Download Data
N-BK7 with MgF₂ Coating Typical Transmission 	Typical transmission of a 3mm thick N-BK7 window with MgF₂ (400-700nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 1.75\% @ 400 - 700\text{nm}$ (N-BK7) Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
N-BK7 with VIS-EXT Coating Typical Transmission 	Typical transmission of a 3mm thick N-BK7 window with VIS-EXT (350-700nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 0.5\% @ 350 - 700\text{nm}$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
N-BK7 with VIS-NIR Coating Typical Transmission 	Typical transmission of a 3mm thick N-BK7 window with VIS-NIR (400-1000nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 0.25\% @ 880\text{nm}$ $R_{avg} \leq 1.25\% @ 400 - 870\text{nm}$ $R_{avg} \leq 1.25\% @ 890 - 1000\text{nm}$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
N-BK7 with VIS 0° Coating Typical Transmission 	Typical transmission of a 3mm thick N-BK7 window with VIS 0° (425-675nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 0.4\% @ 425 - 675\text{nm}$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data

100 20040060080010001200 Wavelength (nm)	
N-BK7 with YAG-BBAR Coating Typical Transmission T (%) 100 95 90 85 80 75 70 200 400 600 800 1000 1200 1400 1600 Wavelength (nm)	Typical transmission of a 3mm thick N-BK7 window with YAG-BBAR (500-1100nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 0.25\%$ @ 532nm $R_{abs} \leq 0.25\%$ @ 1064nm $R_{avg} \leq 1.0\%$ @ 500 - 1100nm Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
N-BK7 with NIR I Coating Typical Transmission T (%) 100 95 90 85 80 75 70 200 400 600 800 1000 1200 1400 1600 Wavelength (nm)	Typical transmission of a 3mm thick N-BK7 window with NIR I (600 - 1050nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 0.5\%$ @ 600 - 1050nm Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
N-BK7 with NIR II Coating Typical Transmission T (%) 100 95 90 85 80 75 70 200 400 600 800 1000 1200 1400 1600 1800 2000 Wavelength (nm)	Typical transmission of a 3mm thick N-BK7 window with NIR II (750 - 1550nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 1.5\%$ @ 750 - 800nm $R_{abs} \leq 1.0\%$ @ 800 - 1550nm $R_{avg} \leq 0.7\%$ @ 750 - 1550nm Data outside this range is not guaranteed and is for reference only. Click Here to Download Data

Compatible Mounts