


[See all 6 Products in Family](#)

## Film-Format Achromatic Polymer Retarder $\lambda/4$ 12.7mm Dia AR

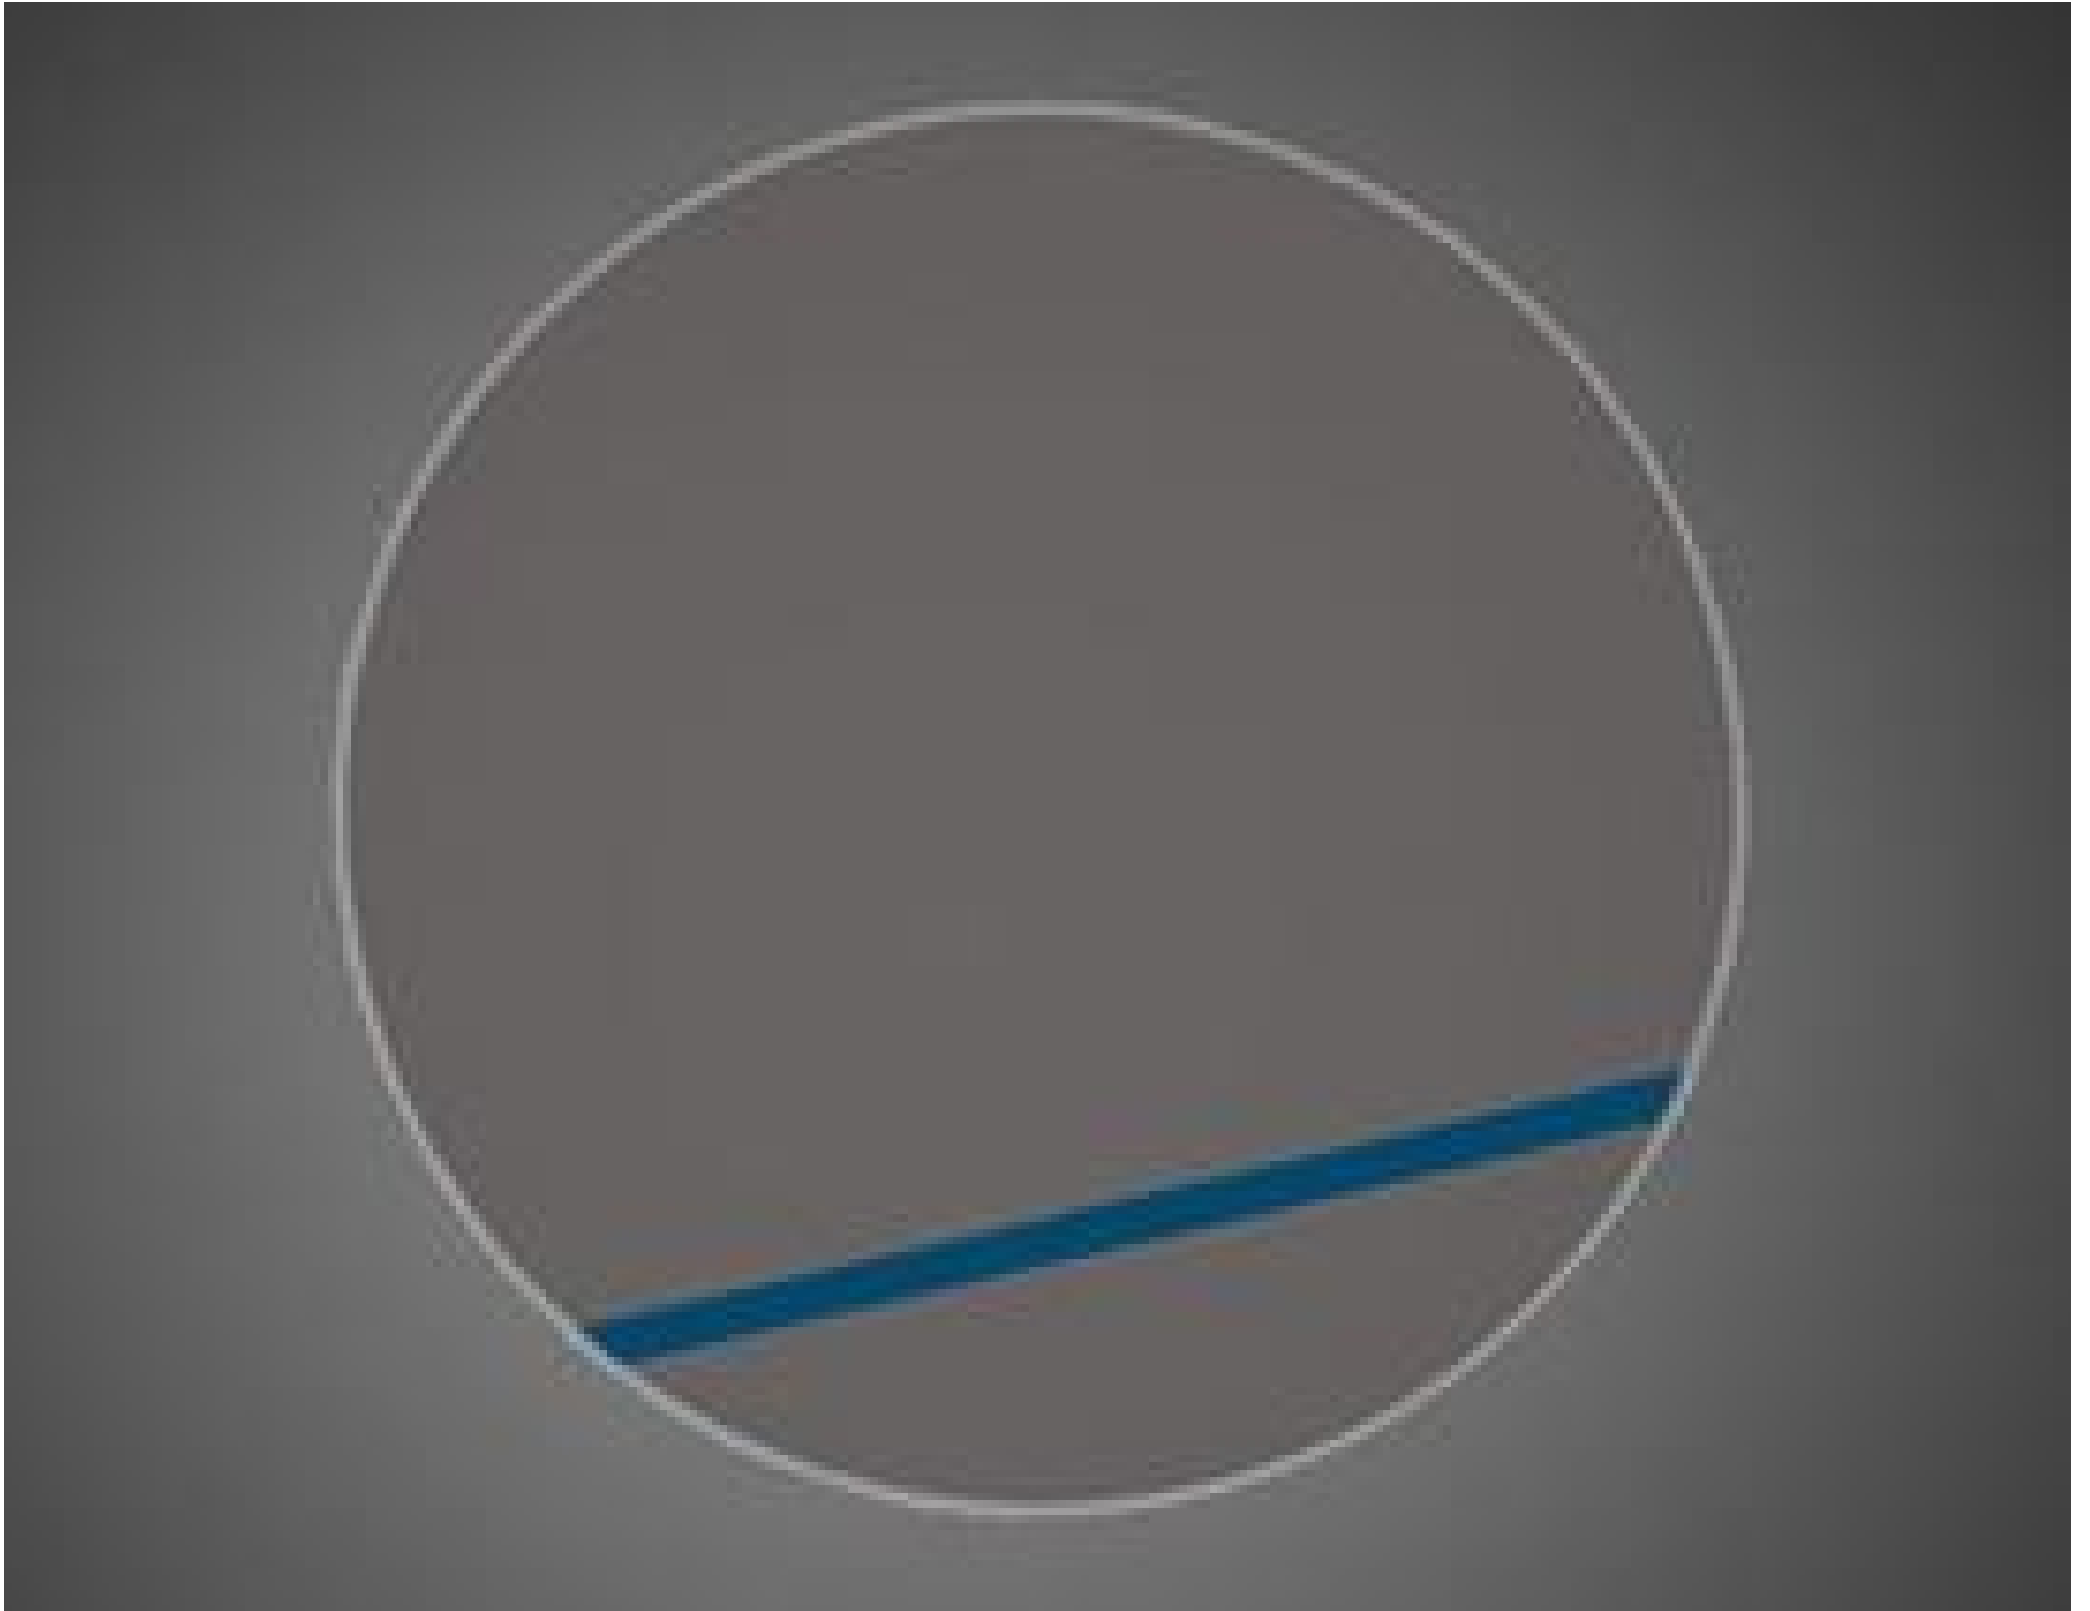

Stock #70-573 **5 In Stock**

MRP ₹50,065

**i** Price inclusive of all taxes

**ADD TO CART**

Volume Pricing	
Qty 1-10	₹50,065 each
Qty 11-25	₹40,144 each
Qty 26+	₹35,092 each
Need More?	<a href="#">Request Quote</a>

### Product Downloads

### General

**Note:**  
Slow axis marked with blue dot on part and stripe on protective film

### Physical & Mechanical Properties

12.70 +/- 0.15      **Diameter (mm):**

**Thickness (mm):**

0.55 Nominal

## Optical Properties

**Angle of Incidence (°):**

±10

**Substrate:**

Polymer Stack

**Retardance:**

$\lambda/4 \pm \lambda/100$

**Surface Quality:**

60-40

**Coating Specification:**

BBAR:  $R \leq 0.75\%$  @ 700-1100nm (per surface)

**Wavelength Range (nm):**

700 - 1100

**Damage Threshold, By Design:**

500 Watt/cm<sup>2</sup> CW, 3 J/cm<sup>2</sup> 10 nsec pulses @ 532nm, 2 J/cm<sup>2</sup> 20 nsec pulses @ 1064nm typical

**Coating Type:**

Anti-Reflection (both sides)

## Environmental & Durability Factors

**Operating Temperature (°C):**

-20 to +40

## Regulatory Compliance

**RoHS 2015:**

[Compliant](#)

**Certificate of Conformance:**

[View](#)

**Reach 250:**

[Compliant](#)

**Country of Origin:**

United States

**Imported By:**

Edmund Optics India Private Limited  
267, Greystone Building, Second Floor,  
6th Cross Rd, Binnamangala,  
Stage 1, Indiranagar, Bengaluru,  
Karnataka, India 560038  
Phone: +91- 80-6845 0000

## Product Details

- Ultra-Thin  $\leq 0.55\text{mm}$  Substrates for OEM Integration
- Options For 700-1100nm and 700-1550nm
- Wide Acceptance Angle Tolerance of  $\pm 10^\circ$

Ultra-Thin NIR Achromatic Polymer Retarders feature an optically fused and adhesive-free construction, allowing for high temperature resistance, high transmission, and an ultra-thin format. These retarders are designed with a multi-layer polymer stack and feature a 0.35mm thickness for  $\lambda/2$  retarders and 0.55mm thickness for  $\lambda/4$  retarders. Available either uncoated or with an AR-Coating, these retarders offer a retardance tolerance of  $\lambda/100$  in the NIR range at a wide range of angles of incidence. Uncoated Ultra-Thin NIR Achromatic Polymer Retarders offer an increased retardance range of 700-1550nm while the coated options feature improved transmission from 700-1100nm. These waveplates are ideal for NIR imaging and analytical instrumentation, as well as OEM integration and other applications requiring a small form factor.