


[See all 12 Products in Family](#)

Red Fluorescent Filter (R7), 12.5mm Diameter



Stock #84-883 CLEARANCE **6 In Stock**

MRP ₹20,481

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-9	₹20,481 each
Qty 10-25	₹18,060 each
Qty 26-49	₹17,051 each
Need More?	Request Quote

Product Downloads

General

Color Filter Type:

Physical & Mechanical Properties

12.50 ±0.10 Diameter (mm):

3.00 ±0.10 Thickness (mm):

Optical Properties

R7 Glass/Filter Number:

Lumilass Substrate:

Uncoated Coating:

Red Color:

1.645 Index of Refraction (n_d):

610.00 Peak Emission Wavelength (nm):

200 - 420 Excitation Wavelength (nm):

365.00 Peak Excitation Wavelength (nm):

Performance

~1 μ W/cm² Minimum Sensitivity:

Material Properties

594.00 Transformation Temperature (°C):

Regulatory Compliance

Compliant RoHS 2015:

View Certificate of Conformance:

Compliant Reach 235:

Japan Country of Origin:

Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91- 80-6845 0000


Product Details

- Excite with UV Illumination
- Wide Range of Fluorescence Colors
- High Sensitivity and Durability

Fluorescent Glass Filters absorb UV energy (peak absorption at 365nm) and re-emit light into the visible spectrum. Appearing colorless when not exposed to UV light, these filters are available with red, orange, yellow, green, blue, and purple emission colors. Sensitivity as low as ~1 μ W/cm² allows for these filters to transform faint UV sources to detectable visible light. Fluorescent Glass Filters are ideal for use in fluorescence microscopy, excimer laser detection and characterization, and as a standard test material for fluorescence characteristics

These fluorescent glass filters are ideal for blocking excitation light while efficiently transmitting emission wavelengths in fluorescence imaging and spectroscopy. Manufactured from high-quality colored glass, they offer sharp spectral cutoffs and strong out-of-band blocking without the need for complex coating stacks. These durable glass filters are well-suited for use in research microscopes, fluorescence systems, and other light-sensitive optical setups requiring consistent and stable spectral performance.

Technical Information

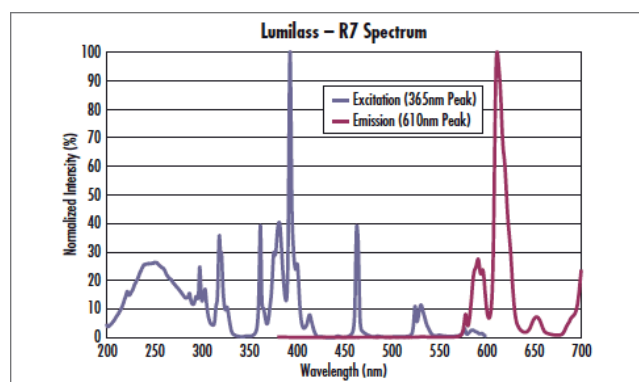

Compatible Mounts
