


[See all 3 Products in Family](#)

Transmitted Microslide (2 to 256 lp/mm), Sinusoidal Target

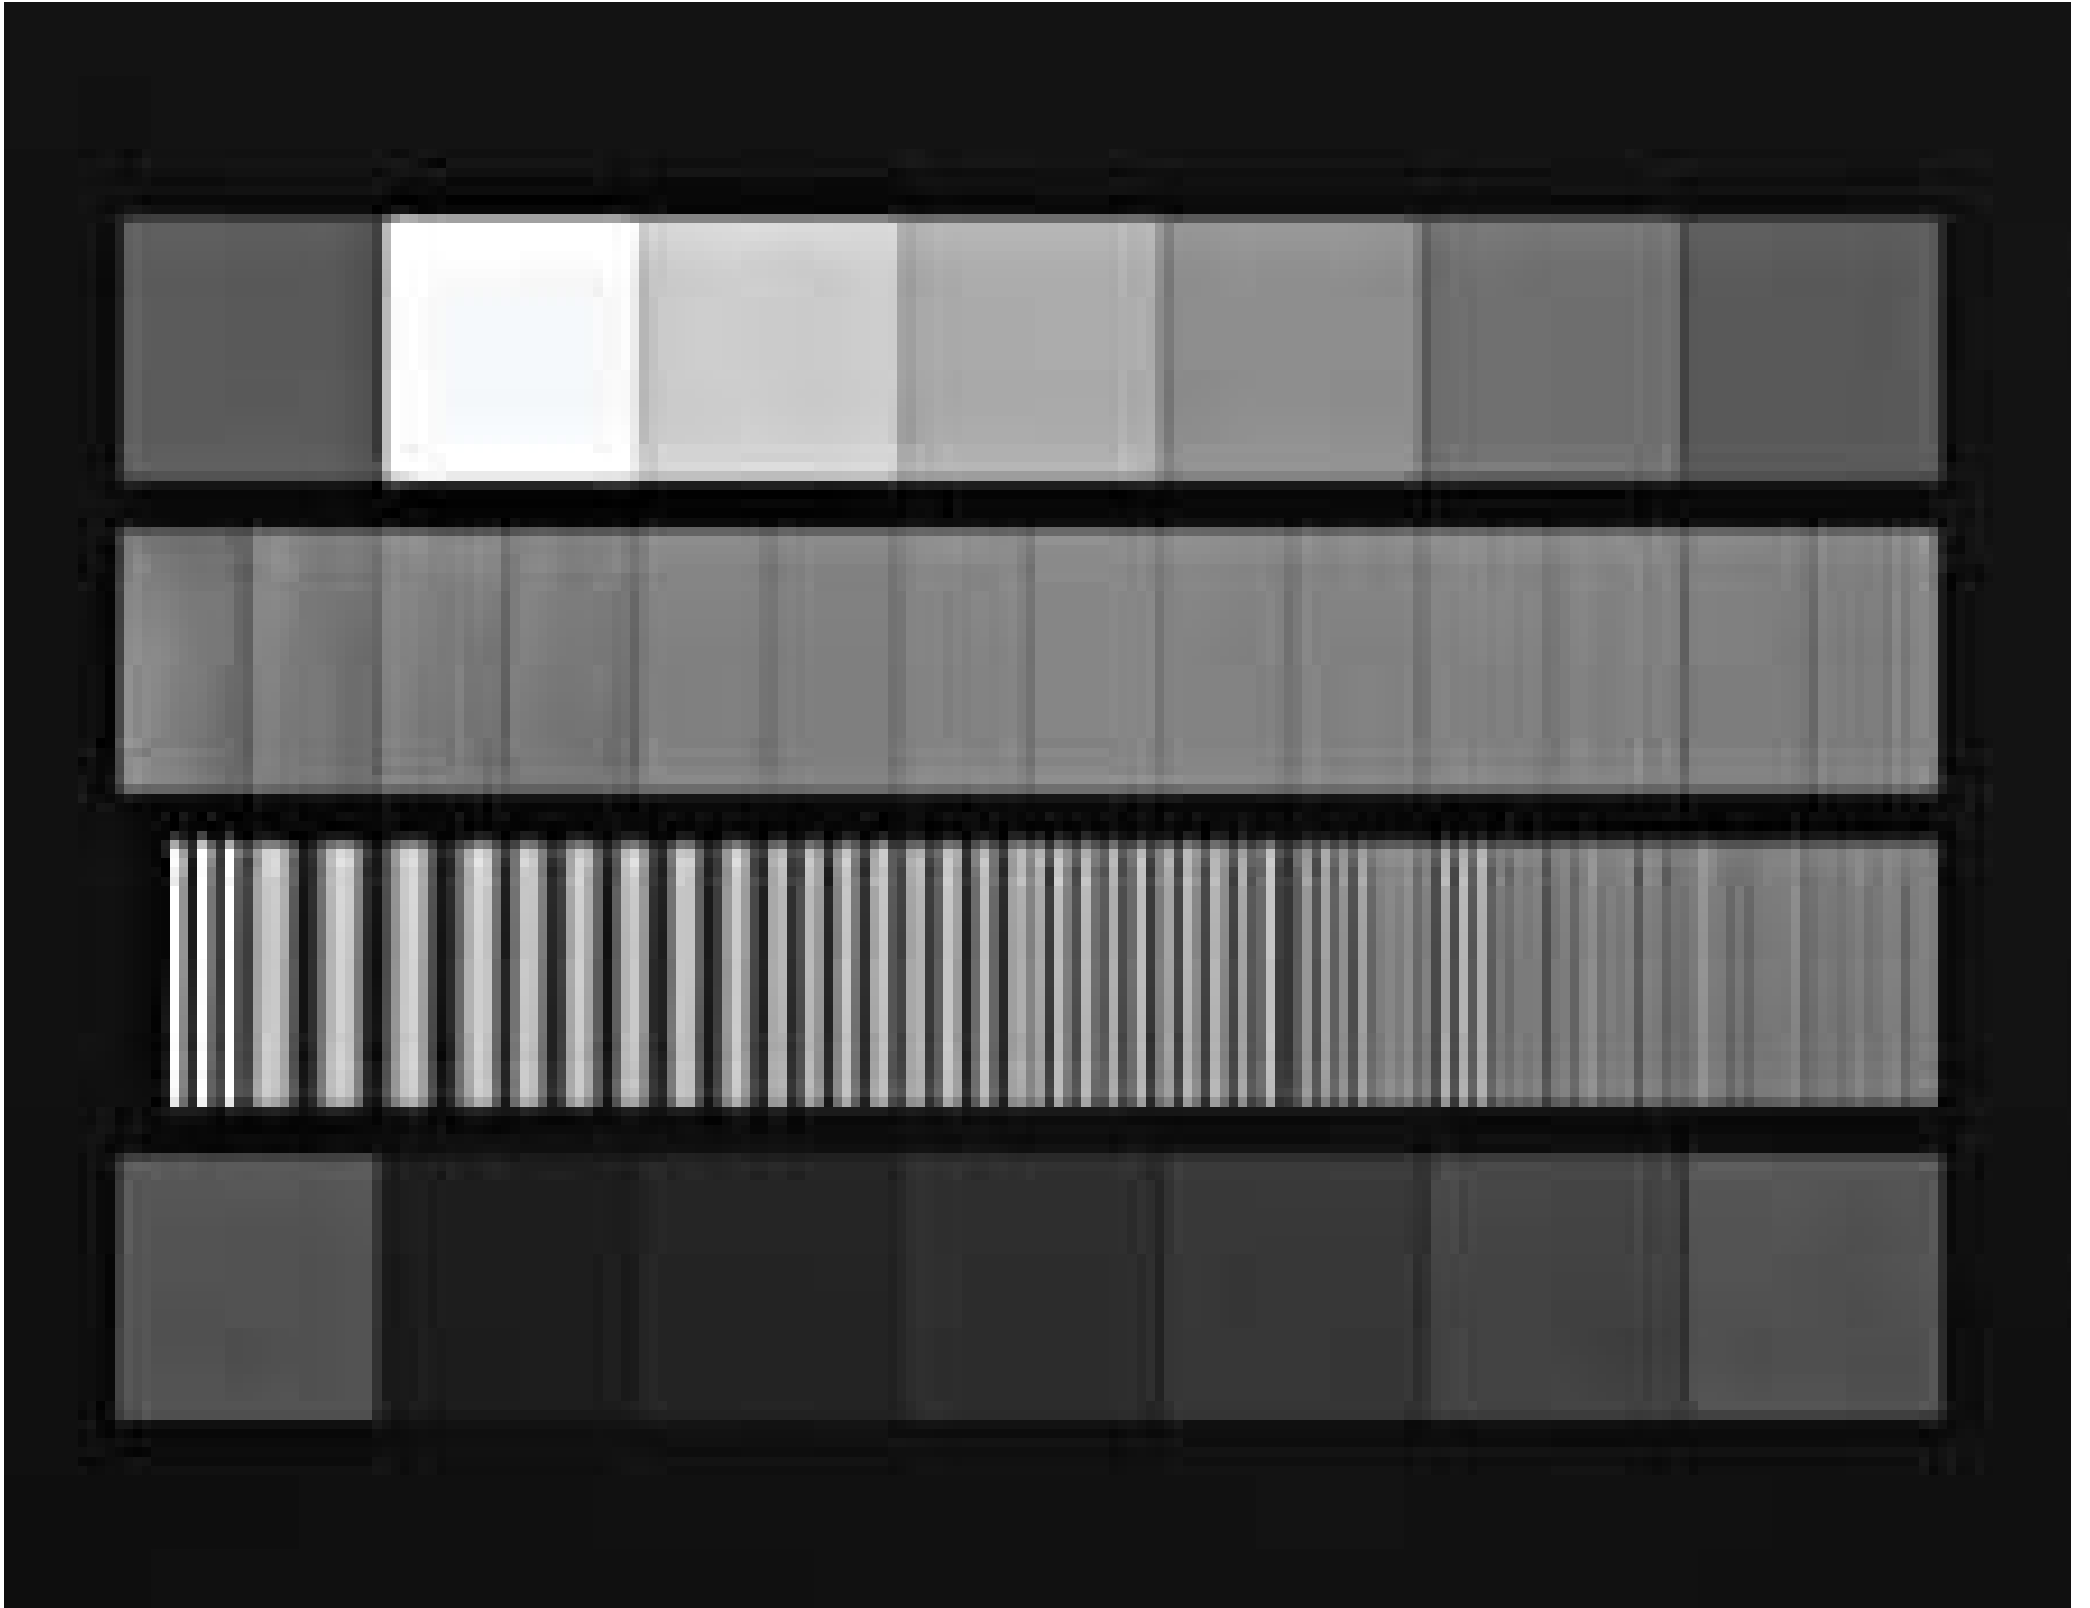

Stock #55-641 **1 In Stock**

- 1 + MRP ₹2,51,694

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-4	₹2,51,694 each
Qty 5+	₹2,39,152 each
Need More?	Request Quote

Product Downloads

General

Transmitted Microslide Sinusoidal **Type:**

No **NST Certification:**

Physical & Mechanical Properties

7.5x6.3 **Pattern Size (mm):**

Dimensions (mm):

25.4 x 76.2 ±nominal

Thickness (mm):
1.60 ±nominal

Construction:
High Resolution Film (0.175 mm) Sandwiched in
Float Glass

Optical Properties

Frequency (lp/mm):
2 - 256

Substrate:
Float Glass

Optical Density OD (Average):
Grayscale Pattern: 0.2 - 1.2, ±0.02

Surface Quality:
60-40

Harmonic Distortion (%):
<3

Electrical

Modulation:
80%

Regulatory Compliance

RoHS 2015:
[Compliant](#)

Certificate of Conformance:
[View](#)

Reach 235:
[Compliant](#)

Country of Origin:
United States


Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91-80-6845 0000

Product Details

- Designed for MTF Testing
- Determines Image Quality of Imaging Components

Sinusoidal patterns are designed specifically for evaluating the MTF of imaging lenses and other system components. This is accomplished by analyzing the ability of imaging components to reproduce the contrast of the sinusoidal target. MTF analysis is necessary when evaluating components to confirm that they meet design specifications and performance expectations. MTF evaluation is one of the best methods to determine overall image quality, not just absolute limitations. Implementation of MTF testing procedures can reduce costs by ensuring that neither under-specification nor over-specification occurs. The advantage of a sinusoidal target is that it relays image quality information over a full range of frequencies instead of only the maximum obtainable resolution. By using the different frequencies on the target, baselines can be established that directly relate to system requirements. The grayscales on the target are used as references for denoting the contrast levels of the sinusoidal frequencies.

Technical Information

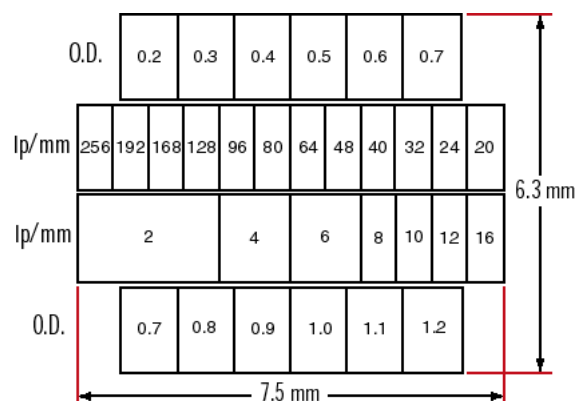

Transmitted Microslide #55-641