


[See all 4 Products in Family](#)

## (2+1)x1 Fiber Pump and PM Combiner

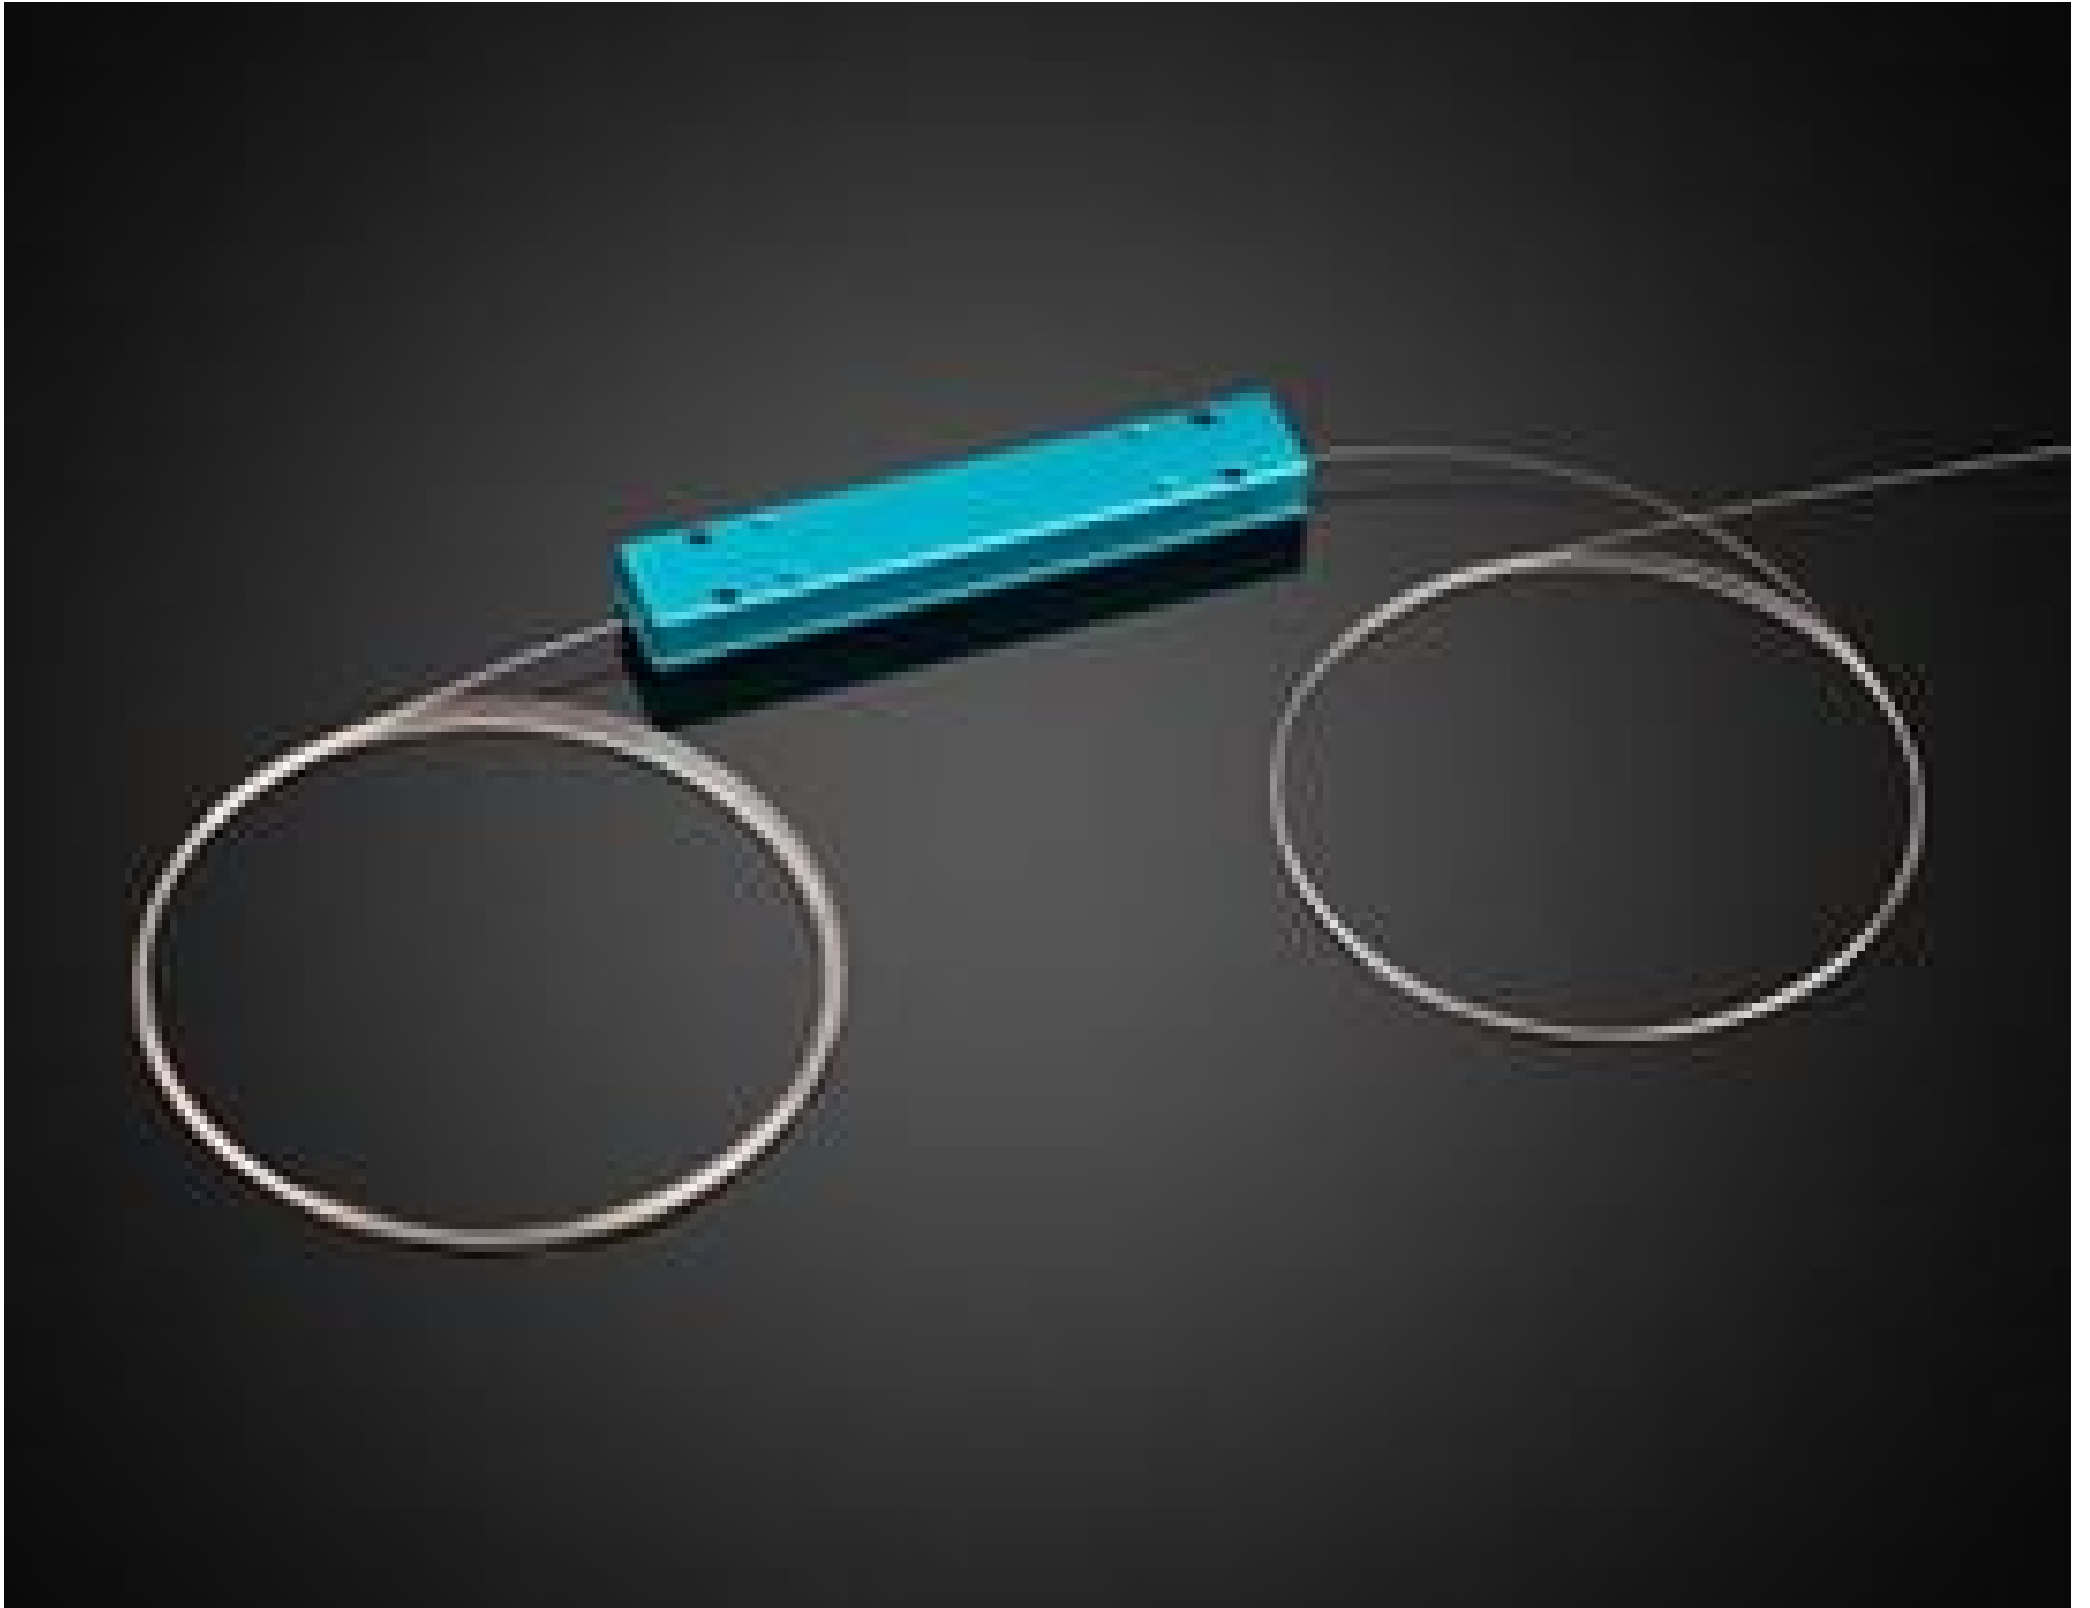

(2+1)x1 Multimode Pump and Signal Combiners

Stock #75-503 NEW **1 In Stock**

MRP ₹95,580

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-4	₹95,580 each
Qty 5-9	₹86,022 each
Need More?	<a href="#">Request Quote</a>

### Product Downloads

### General

**Fiber Cable Type:**  
 Signal Input/Output Fiber: 10/130 PM double cladding fiber  
 Pump Fiber (1) (2): 105/125 MM fiber

### Physical & Mechanical Properties

**Length of Fiber (m):**  
 1

### Optical Properties

Extinction Ratio:  
>25

Signal Wavelength Range (nm):  
1450 - 1600

Pump Wavelength Range (nm):  
800 - 1000

Return Loss (dB):  
>45

## Performance

Pump Transmission Efficiency (%):  
>92

Handling Power (Per Port):  
50

## Hardware & Interface Connectivity

Insertion Loss (dB):  
<0.2 (Typ)

## Environmental & Durability Factors

Operating Temperature (°C):  
-5 to +70

Storage Temperature (°C):  
-40 to +85

## Regulatory Compliance

Certificate of Conformance:  
[View](#)

Country of Origin:  
United States

Imported By:  
Edmund Optics India Private Limited  
267, Greystone Building, Second Floor,  
6th Cross Rd, Binnamangala,  
Stage 1, Indiranagar, Bengaluru,  
Karnataka, India 560038  
Phone: +91-80-6845 0000

## Product Details

- Combines Laser Pump Sources and One Signal into One Output Fiber
- Wavelength Insensitive with High Power Transfer Efficiency
- Preservation of Modal Content

Multimode Fiber Pump and Signal Combiners integrate high-power pump lasers and low-power signal lasers into a single optical fiber, ensuring efficient energy transfer, brightness preservation, and excellent optical performance. Designed for easy system integration, the combiners support compact packaging and seamless incorporation into fiber laser and amplifier systems. Multimode Fiber Pump and Signal Combiners include a heat sink package and a built-in port for temperature monitoring. These combiners are ideal for co- and counter-pump configurations and for fiber laser and laser power amplifier applications in industrial, military, medical, and telecommunications markets.

**Note:** [Contact us](#) for custom configuration options as these combiners can be tailored to support a wide range of power levels, input configurations, and fiber types.