

[See all 125 Products in Family](#)

## 76.2mm Dia. 532nm $\lambda/4$ Quartz Waveplate Zero Order



Stock **#85-059** [CONTACT US](#)

- 1 + MRP ₹2,74,926

**i** Price inclusive of all taxes

**ADD TO CART**

Volume Pricing	
Qty 1+	₹2,74,926 each
Need More?	<a href="#">Request Quote</a>

### Product Downloads

#### General

Crystalline Waveplate **Type:**

#### Physical & Mechanical Properties

46.00 **Clear Aperture CA (mm):**

76.20 +0.00/-0.25 **Diameter (mm):**


10.00 +0.00/-0.25 **Thickness (mm):**

Crystalline	<b>Construction:</b>
<3	<b>Parallelism (arcsec):</b>
<b>Optical Properties</b>	
Laser V-Coat (532nm)	<b>Coating:</b>
532	<b>Design Wavelength DWL (nm):</b>
Crystal Quartz	<b>Substrate:</b> □
$\lambda/4$	<b>Retardance:</b>
10-5	<b>Surface Quality:</b>
$\lambda/8$ for central 80% of clear aperture	<b>Transmitted Wavefront, P-V:</b>
$\pm\lambda/200$	<b>Retardance Tolerance:</b>
0.0001	<b>Temperature Coefficient (<math>\lambda/^\circ\text{C}</math>):</b>
0	<b>Retardance Order:</b>
<b>Regulatory Compliance</b>	
<a href="#">Compliant</a>	<b>RoHS 2015:</b>
<a href="#">View</a>	<b>Certificate of Conformance:</b>
<a href="#">Compliant</a>	<b>Reach 240:</b>
United States	<b>Country of Origin:</b>
Edmund Optics India Private Limited 267, Greystone Building, Second Floor, 6th Cross Rd, Binnamangala, Stage 1, Indiranagar, Bengaluru, Karnataka, India 560038 Phone: +91- 80-6845 0000	<b>Imported By:</b>

## Product Details

- Zero Order and Multiple Order Waveplates
- $\lambda/4$  and  $\lambda/2$  Retardance
- Mounted in Black Anodized Aluminum Frame
- [Zero Order Polymer Waveplates](#) Also Available

Quartz Waveplates (Retarders) are available in multiple order and zero order. These waveplates are ideal for a range of applications. Multiple order waveplates are ideal for applications where the wavelength deviates less than  $\pm 1\%$  from the design wavelength of the waveplate. For applications with a greater than  $\pm 1\%$  deviation, zero order waveplates are recommended due to their increased bandwidth and lower sensitivity to temperature change. Quartz Waveplates (Retarders) have the fast axis marked on the edge of the mount to ease system integration.

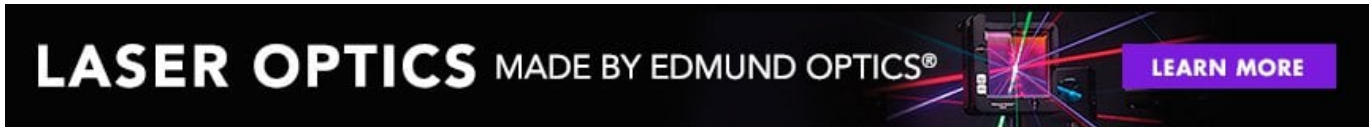

## Technical Information

