

[See all 76 Products in Family](#)

LightPath 355561 | 15mm Dia., 0.60 NA, BBAR (600-1050nm), Molded Aspheric Lens

See More by [Lightpath®](#)



Precision Molded Aspheric Lenses

Stock **#37-106** [CONTACT US](#)

[Other Coating Options](#)

- 1 + MRP ₹8,576

i Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-10	₹8,576 each
Qty 11-49	₹7,718 each
Need More?	Request Quote

Product Downloads

General

355561 **Lightpath Lens Code:**

Aspheric Lens **Type:**

Collimate or Focus Laser Light **Typical Applications:**

Physical & Mechanical Properties

15.00 ±0.015 **Diameter (mm):**

12.5 **Clear Aperture CA (mm):**

2.56 **Edge Thickness ET (mm):**

5.38 ±0.05 **Center Thickness CT (mm):**

Protective as needed **Bevel:**

Optical Properties

10.00 @ 850nm **Effective Focal Length EFL (mm):**

0.60 **Numerical Aperture NA:**

Substrate:
[D-ZLaF52LA](#)

±1 **Focal Length Tolerance (%):**

850 **Aspheric Design Wavelength (nm):**

BBAR (600-1050nm) **Coating:**

R_{abs} <1.0% @ 600 - 1050nm **Coating Specification:**

60-40 **Surface Quality:**

0.83 **f/#:**

40.79 **Abbe Number (v_d):**

1.806 **Index of Refraction (n_d):**

600 - 1050 **Wavelength Range (nm):**

7 **Working Distance (mm):**

Infinite **Conjugate Distance:**

850.00 **Focal Length Specification Wavelength (nm):**

<0.40 **Transmitted Wavefront Error (λ, RMS):**

Material Properties

6.9 **Coefficient of Thermal Expansion CTE (10⁻⁶/°C):**

Environmental & Durability Factors

≤200 **Operating Temperature (°C):**

Regulatory Compliance

[Compliant](#) **RoHS 2015:**

[View](#) **Certificate of Conformance:**

[Compliant](#) **Reach 247:**

China **Country of Origin:**

Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91- 80-6845 0000


Product Details

- Eliminate Spherical Aberration
- Multiple Coating Options Available
- Range of Numerical Apertures

LightPath® Geltech™ Molded Aspheric Lenses are used to eliminate spherical aberration and improve focusing and collimating accuracy in a variety of laser applications. Low NA aspheric lenses are designed to maintain beam shape, while high NA lenses gather all available light to maintain beam power over long distances. LightPath® Geltech™ Molded Aspheric Lenses are ideal for applications including sighting systems, bar code scanners, laser diode-to-fiber coupling, optical data storage, or biomedical lasers.



Technical Information

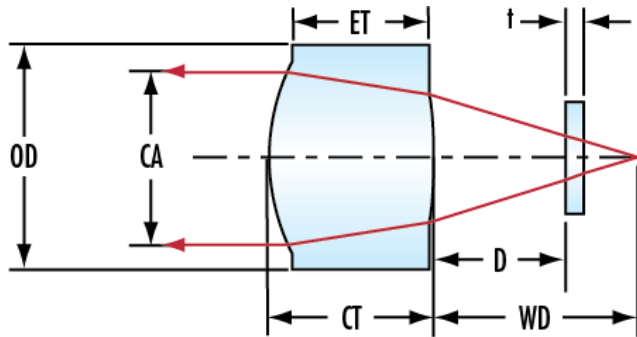

Compatible Mounts