

## 220mm Dia x 100mm FL Alum. Coated, Parabolic Reflector



Stock **#68-793** 1 In Stock

-

1

+

₹67,730

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-10       | ₹67,730 each                  |
| Qty 11-25      | ₹59,555 each                  |
| Qty 26-49      | ₹56,052 each                  |
| Need More?     | <a href="#">Request Quote</a> |

Product Downloads

General

Parabolic Mirror

Type:

Physical & Mechanical Properties

220.00 +0.0/-0.5

Diameter (mm):

No Center Hole

Center Hole Diameter (mm):

|                                    |                                     |
|------------------------------------|-------------------------------------|
| 33.0                               | Height (mm):                        |
| Optical Properties                 |                                     |
| BOROFLOAT®                         | Substrate: <input type="checkbox"/> |
| 100.00                             | Focal Length FL (mm):               |
| 0.455                              | Aperture (f/#):                     |
| Protected Aluminum (400-700nm)     | Coating:                            |
| R <sub>avg</sub> >85% @400 - 700nm | Coating Specification:              |
| Metal                              | Coating Type:                       |
| 400 - 700                          | Wavelength Range (nm):              |

|                                     |                             |
|-------------------------------------|-----------------------------|
| Regulatory Compliance               |                             |
| View                                | Certificate of Conformance: |
| Japan                               | Country of Origin:          |
| Edmund Optics India Private Limited | Imported By:                |

Product Details

• Precision Polished Substrate

• Protected Aluminum and Cold Mirror Coating Options


• Ideal for Highly Divergent Light Sources

• [Precision Ellipsoidal Reflectors](#) Also Available

Precision Parabolic Reflectors are ideal for collimating a light source placed at the focal point of the mirror. The parabolic profile eliminates spherical aberration, allowing the light source to maintain its wavefront characteristics. These Precision Parabolic Reflectors feature very low f/#s, making them ideal for highly divergent light sources. The protected aluminum coating features broadband high reflection through the visible and IR spectra. The cold mirror coating reflects visible light while transmitting NIR, making it ideal for cold condensing applications.

Precision Parabolic Reflectors are precision polished, yielding exact aspheric profiles. These mirrors offer improved thermal stability and superior focusing efficiency versus commercially available press-molded reflectors. Typical applications include use as steppers for PCB, LCD, or PDP production, solar simulators, fiber optic illuminators, and projectors.

Technical Information

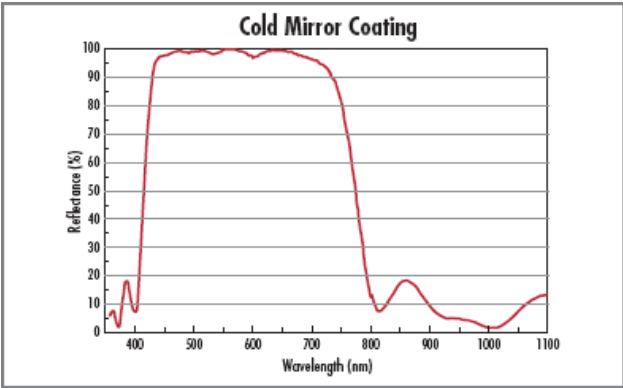

| Diameter | Focal Length f | Center Hole Diameter d | Height H | Stock No. |
|----------|----------------|------------------------|----------|-----------|
| 100mm    | 12.5mm         | —                      | 45mm     | #90-964   |
|          |                |                        |          | #90-967   |
|          | 19mm           | 30mm                   | 32mm     | #68-791   |
|          |                |                        |          | #68-795   |
| 152mm    | 17mm           | 30mm                   | 79mm     | #68-792   |
|          | 30mm           | 35mm                   | 47mm     | #90-965   |
| 220mm    | 100mm          | —                      | 33mm     | #68-793   |
| 300mm    | 42mm           | —                      | 130mm    | #90-966   |

