
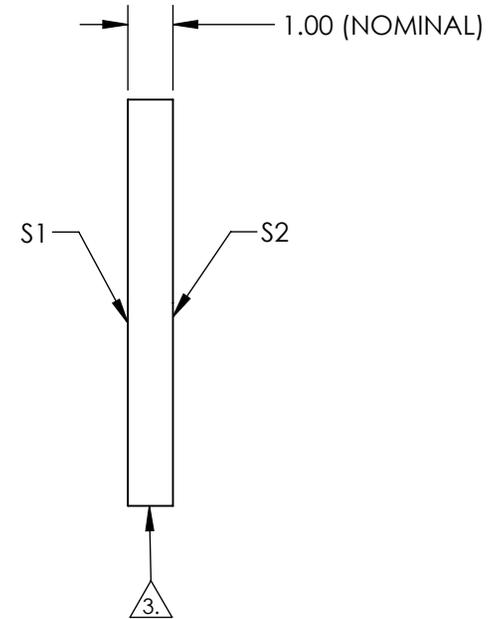


NOTES:

1. SUBSTRATE: Float Glass
2. COATING (APPLY ACROSS CLEAR APERTURE)
 - S1: Protected Aluminum (400-700nm)
 - R(AVG) >85% @ 400 - 700nm @ 45°
 - S2: NONE
3.  GROUND EDGES
4. RoHS COMPLIANT

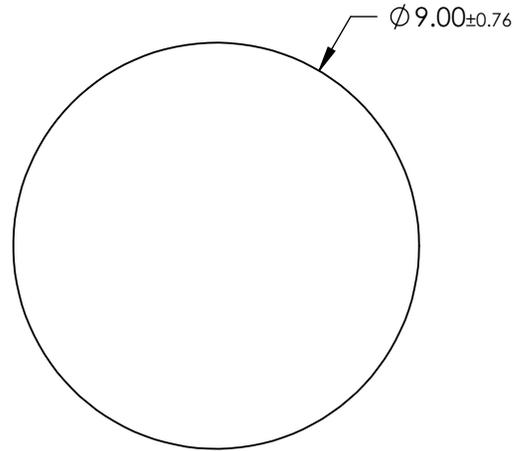

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	80-50	N/A
SURFACE FLATNESS	4 - 6λ	N/A
CLEAR APERTURE	ϕ8.10	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 **Edmund Optics®**

TITLE: 9mm Diameter, 4-6λ Mirror

DWG NO: 46647

SHEET 1 OF 1