


NOTES:

1. SUBSTRATE:
N-BK7
2. CENTERING TOLERANCE (AT 587.6nm):
BEAM DEVIATION: ± 3 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE):
S1, S2, S3, & S4: R(ABS) $< 0.25\%$ @ 980nm
S5: MULTILAYER DIELECTRIC

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING


4. FINE GROUND SURFACE
5. ELEMENTS TO BE CEMENTED WITH NORLAND OPTICAL ADHESIVE NOA 61
6. MARK IDENTIFIES BEAMSPLITTED COATED RIGHT ANGLE PRISM

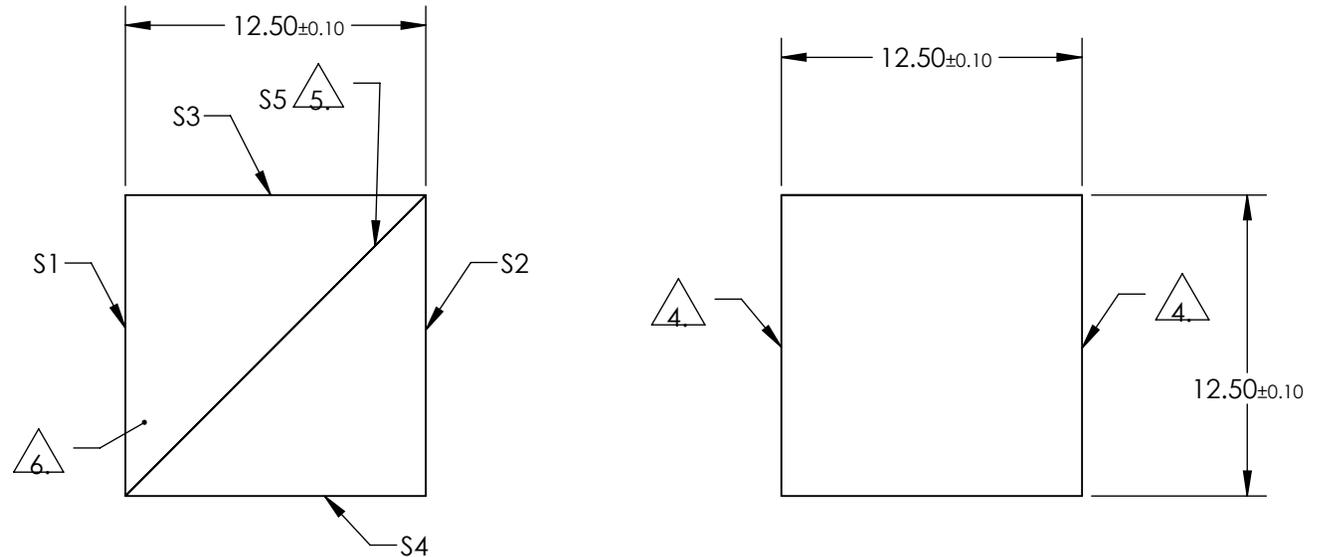

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

	S1	S2
SHAPE	PLANO	PLANO
SURFACE ACCURACY	$\lambda/4$	$\lambda/4$
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	90%	90%

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

TITLE	DWG NO	SHEET 1 OF 1
12.5mm 980nm, Laser Line Polarizing Cube Beamsplitter	48881	