


NOTES:


1. SUBSTRATE:  
PMMA, PERMANENTLY LAMINATED TO PET FILM WITH HARD MICROSTRUCTURED POLYMER COATING
2. TYPE OF DIFFUSER: High Efficiency Diffuser
3. DIFFUSING ANGLE (°): 80
4. OPERATING TEMPERATURE (°C): -34 to +70

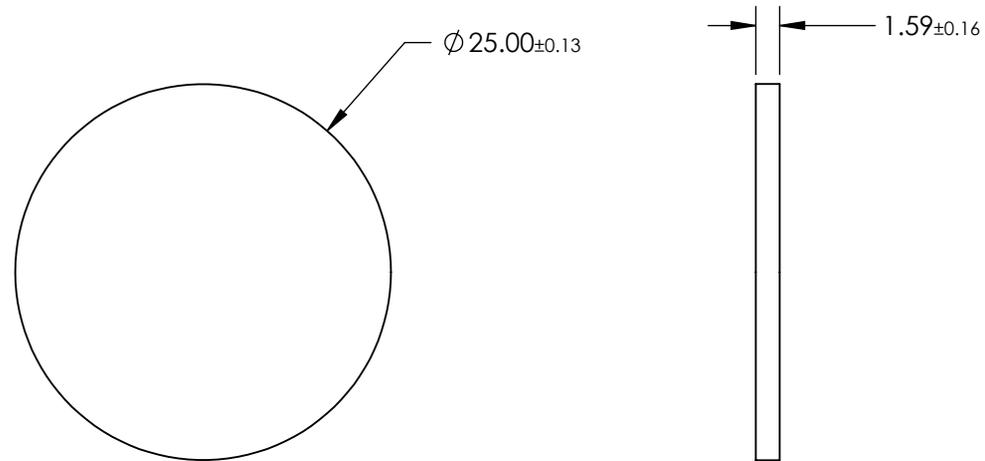

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

**EO**® Edmund Optics®

THIRD ANGLE PROJECTION 		TITLE	25mm Dia., 80° Diffusion Angle, High Efficiency Diffuser	
ALL DIMS IN	mm	DWG NO	28924	SHEET 1 OF 1