


[See all 76 Products in Family](#)

LightPath 355485 | 1 x 1mm, 0.50 NA, BBAR (600-1050nm), Molded Aspheric Lens

See More by [Lightpath®](#)

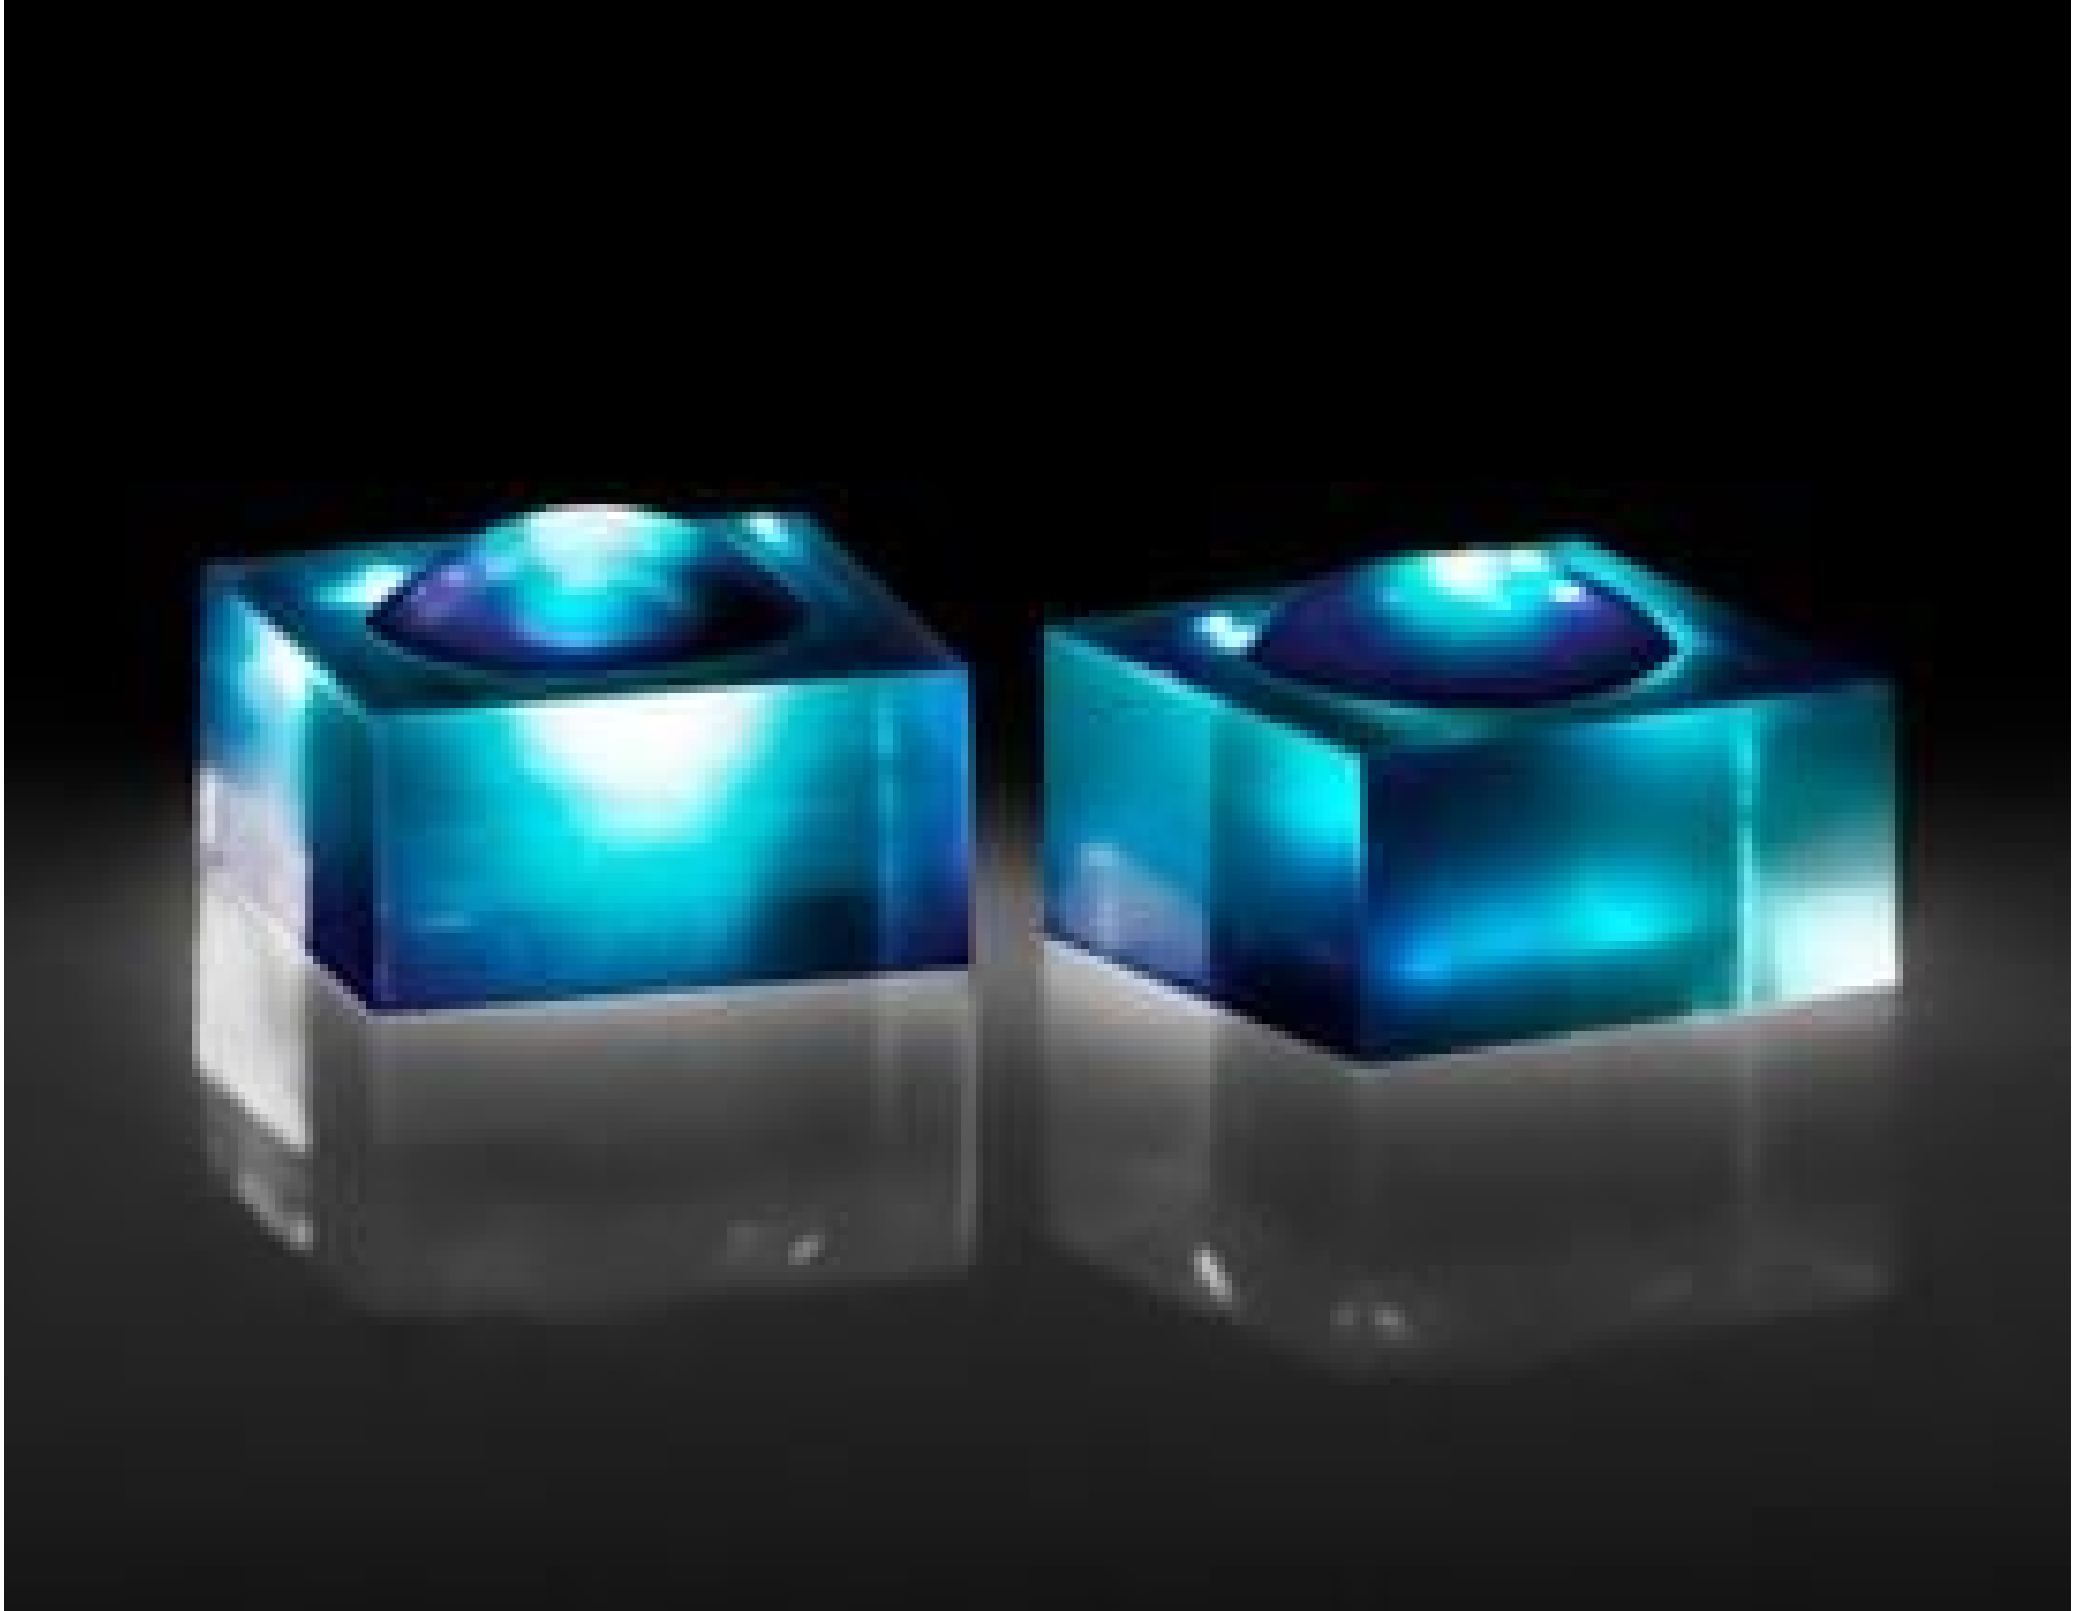

Stock #37-113 CLEARANCE **1 In Stock**

MRP ₹8,980

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1+	₹8,980 each
Need More?	Request Quote

Product Downloads

General

355485 **Lightpath Lens Code:**

Aspheric Lens **Type:**

Finite Conjugate for Magnification **Typical Applications:**

NA, Image (mm): 0.10
WD, Image (mm): 3.03
WD, Object (mm): 0.3 **Note:**

Physical & Mechanical Properties

1.0x1.0±0.015 **Dimensions (mm):**

0.35 **Clear Aperture CA (mm):**

0.51 **Edge Thickness ET (mm):**

0.66 ±0.05 **Center Thickness CT (mm):**

Protective as needed **Bevel:**

Optical Properties

0.55 @ 1550nm **Effective Focal Length EFL (mm):**

0.50 **Numerical Aperture NA:**

Substrate:
[D-ZLaF52LA](#)

±1 **Focal Length Tolerance (%):**

1550 **Aspheric Design Wavelength (nm):**

BBAR (600-1050nm) **Coating:**

Coating Specification:
R_{abs} <1.0% @ 600 - 1050nm

40-20 **Surface Quality:**

1.00 **f#:**

40.79 **Abbe Number (v_d):**

1.806 **Index of Refraction (n_d):**

600 - 1050 **Wavelength Range (nm):**

0.3 **Working Distance (mm):**

Finite **Conjugate Distance:**

1550.00 **Focal Length Specification Wavelength (nm):**

<0.040 **Transmitted Wavefront Error (λ, RMS):**

Material Properties

6.9 **Coefficient of Thermal Expansion CTE (10⁻⁶/°C):**

Environmental & Durability Factors

≤200 **Operating Temperature (°C):**

Regulatory Compliance

[Compliant](#) **RoHS 2015:**

[View](#) **Certificate of Conformance:**

[Compliant](#) **Reach 233:**

China **Country of Origin:**

Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91- 80-6845 0000

Product Details

- Eliminate Spherical Aberration
- Multiple Coating Options Available
- Range of Numerical Apertures

LightPath® Geltech™ Molded Aspheric Lenses are used to eliminate spherical aberration and improve focusing and collimating accuracy in a variety of laser applications. Low NA aspheric lenses are designed to maintain beam shape, while high NA lenses gather all available light to maintain beam power over long distances. LightPath® Geltech™ Molded Aspheric Lenses are ideal for applications including sighting systems, bar code scanners, laser diode-to-fiber coupling, optical data storage, or biomedical lasers.



Technical Information

