

0.6 OD 100 x 300mm, Neutral Density Filter



Stock **#84-001** 13 In Stock

-

1

+

MRP ₹46,851

 Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-10	₹46,851 each
Qty 11-49	₹39,869 each
Need More?	Request Quote

Product Downloads

General

Type:

Neutral Density Filter

Physical & Mechanical Properties

Dimensions (mm):

100.0 x 300.0 (Nominal)

Length (mm):

300.00

Width (mm):

100.00	
Optical Properties	
Optical Density OD (Average):	
0.6	
Substrate: □	
Wratten 2	
Coating:	
Uncoated	
Transmission (%):	
25.00	
Blocking Wavelength Range (nm):	
400 - 700	
Regulatory Compliance	
RoHS 2015:	
Compliant	
Reach 223:	
Compliant	
Certificate of Conformance:	
View	
Country of Origin:	
United States	
Imported By:	
Edmund Optics India Private Limited 267, Greystone Building, Second Floor, 6th Cross Rd, Binnamangala, Stage 1, Indiranagar, Bengaluru, Karnataka, India 560038 Phone: +91- 80-6845 0000	

Product Details


Storage in humid environments can cause the filters to cloud and temperatures should not exceed 50°C for extended periods. Every 0.3 density increment equals one f-stop.

- Available in Large Sizes
- Easily Cut for Custom Sizing
- Kodak Filter No. 96

Kodak Wratten 2 Neutral Density Filters are used in image forming optical systems to reduce light intensity across the visible spectrum without altering the spectral profile. These ND filters feature tolerances of ±10% of the nominal diffuse density. Although the filters transmit the infrared spectrum, neutrality is controlled only in the visible spectrum. Kodak Wratten 2 Neutral Density Filters are uncoated and have a blocking wavelength range of 400-700nm. All ND filters are 0.1mm in thickness and can be cut for easy custom sizing.

Note: Storage in humid environments can cause the filters to cloud and temperatures should not exceed 50°C for extended periods. Every 0.3 density increment equals one f-stop.

Technical Information

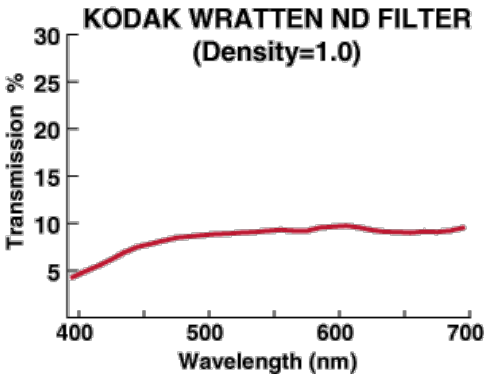

Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools