

[See all 28 Products in Family](#)

## 0.9 OD, 25mm Dia., Precision Anti-Reflection (AR) Coated Absorptive ND Filter



Precision Absorptive Neutral Density (ND) Filters

Stock **#16-063** **2 In Stock**

MRP ₹11,805

**Price inclusive of all taxes**

**ADD TO CART**

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-10       | ₹11,805 each                  |
| Qty 11-25      | ₹10,694 each                  |
| Qty 26-49      | ₹9,635 each                   |
| Need More?     | <a href="#">Request Quote</a> |

### Product Downloads

### General

Neutral Density Filter **Type:**

### Physical & Mechanical Properties

25.00 **Diameter (mm):**

**Thickness (mm):**

1.75 (nominal)

90 Clear Aperture (%):

<30 Parallelism (arcsec):

## Optical Properties

Optical Density OD (Average):  
0.9 ±10% @ 550nm

Glass/Filter Number:  
**SCHOTT NG4**

Substrate:   
ND Filter Glass

Coating:  
BBAR (450-700nm)

Index of Refraction ( $n_d$ ):  
1.51

Surface Quality:  
80-50

Transmission (%):  
12.59

Blocking Wavelength Range (nm):  
400 - 700

Transmitted Wavefront, P-V:  
 $\lambda/4$

Coating Specification:  
 $R_{avg} \leq 1.0\% @ 450 - 700nm @ 0^\circ$

## Material Properties

Transformation Temperature ( $^\circ C$ ):  
483

## Regulatory Compliance

RoHS 2015:  
**Compliant**

Certificate of Conformance:  
[View](#)

REACH 241:  
**Compliant**

Country of Origin:  
United States


Imported By:  
Edmund Optics India Private Limited  
267, Greystone Building, Second Floor,  
6th Cross Rd, Binnamangala,  
Stage 1, Indiranagar, Bengaluru,  
Karnataka, India 560038  
Phone: +91- 80-6845 0000

## Product Details

- $\lambda/4$  Transmitted Wavefront Distortion
- AR Coated for 450 - 700nm
- Optical Densities from 0.1 to 4.0 Available
- [Absorptive Neutral Density \(ND\) Filters](#) Also Available

Precision Anti-Reflection (AR) Coated Absorptive Neutral Density (ND) Filters feature SCHOTT NG Colored Glass substrates that are polished to achieve a transmitted wavefront distortion (TWFD) specification of  $\lambda/4$ . These filters are coated on both surfaces with an anti-reflection (AR) coating from 450 - 700nm, reducing back reflections and enabling filter stacking with less losses and artifacts. Precision Anti-Reflection (AR) Coated Absorptive Neutral Density (ND) Filters are available with optical densities from 0.1 to 4.0 and can be stacked together to achieve custom optical densities to meet application requirements. These neutral density filters are available in 25mm diameter or 50mm square sizes and are ideal for machine vision, imaging, or low power laser applications.

## Technical Information

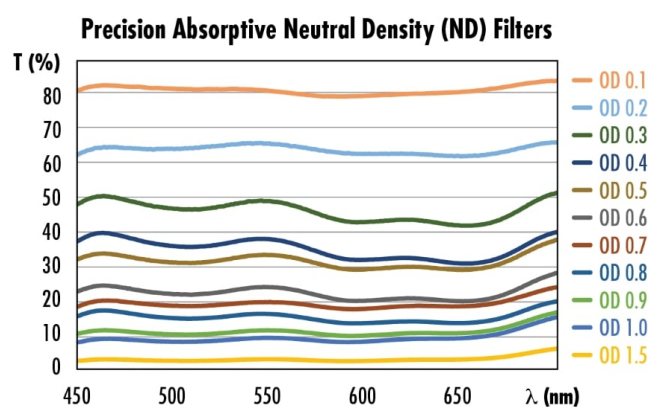



## Compatible Mounts

;