


[See all 12 Products in Family](#)

10mm Dia., 1.5mm Thick, Zinc Selenide (ZnSe) Diffuser

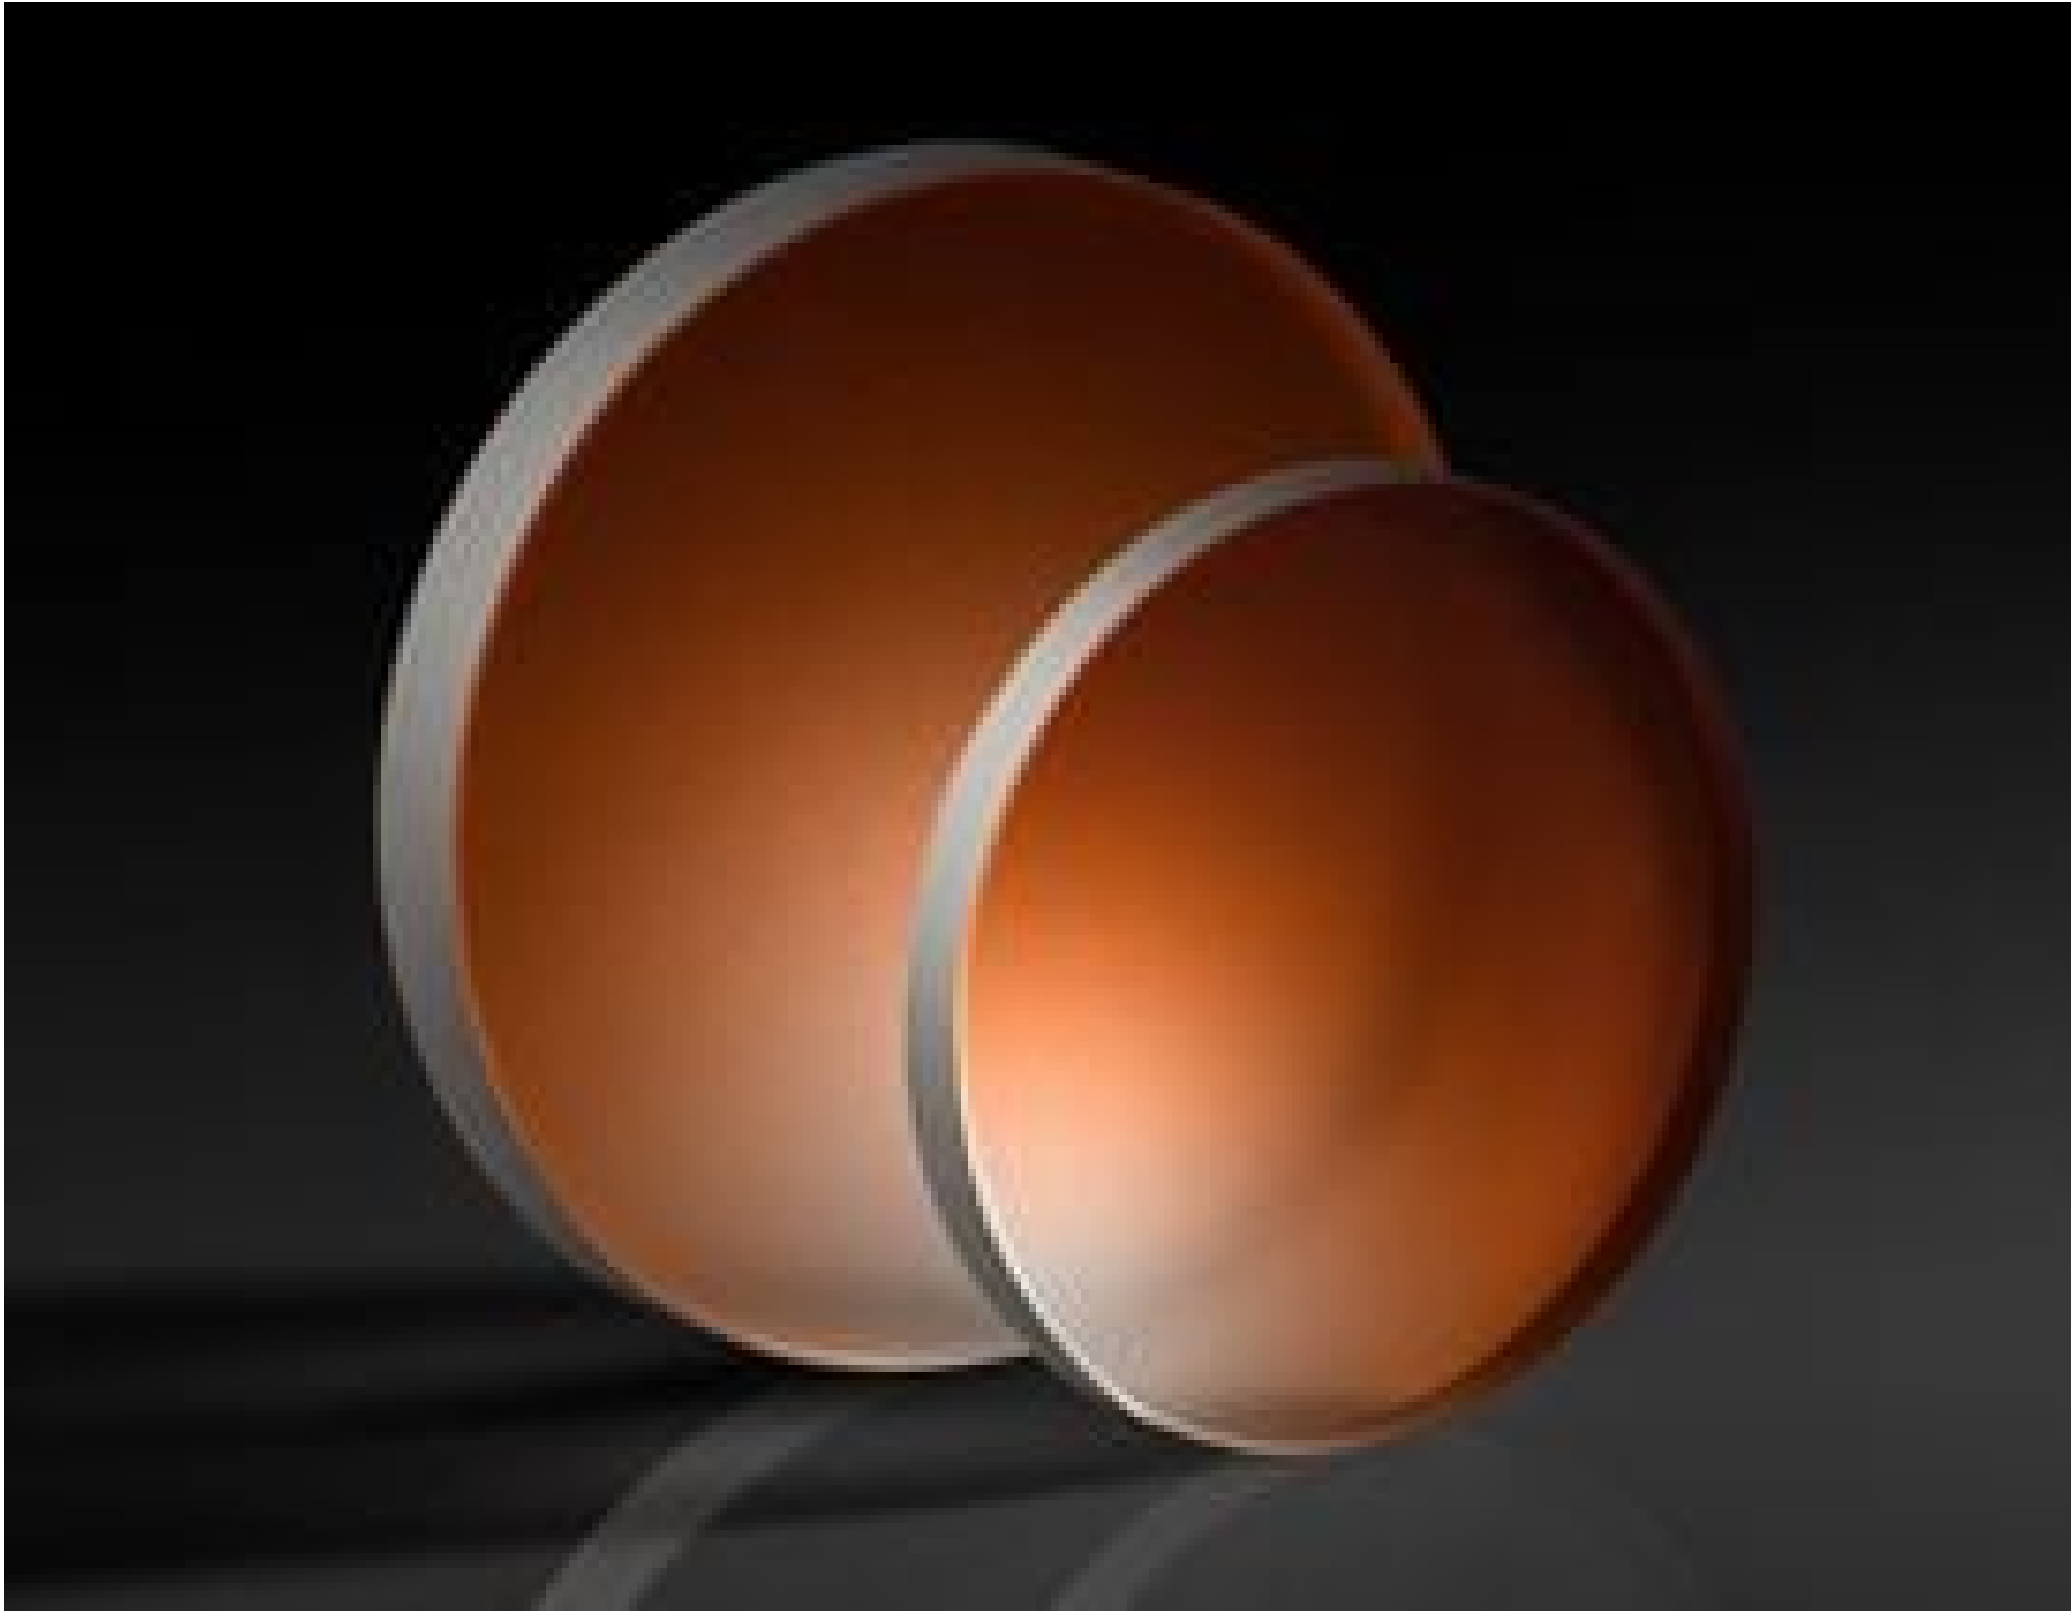

IR Calcium Fluoride (CaF2) Diffusers

Stock **#72-633** NEW **7 In Stock**

-

1

+

₹21,750

ADD TO CART

Volume Pricing	
Qty 1-5	₹21,750 each
Qty 6-25	₹17,400 each
Qty 26+	₹16,313 each
Need More?	Request Quote

Product Downloads

General	
IR Diffuser	Type:
Fine Grind S1 to 180 grit, Polished S2	Note:
Physical & Mechanical Properties	
9 Specified for S2	Clear Aperture CA (mm):

10.00 ±0.01	Diameter (mm):
Fine Ground	Edges:
1.50 ±0.10	Thickness (mm):
<1 arcmin	Parallelism (°):
Protective as needed	Bevel:

Optical Properties	
Uncoated	Coating:
ZnSe	Substrate: □
600 - 12000	Wavelength Range (nm):
80-50 Specified for S2	Surface Quality:
S1: N/A S2: λ/2	Surface Accuracy, P-V:


Regulatory Compliance	
View	Certificate of Conformance:
United States	Country of Origin:
Edmund Optics India Private Limited	Imported By:

Product Details

- Evenly Ground First Surface for Even Diffusion
- Low Index of Refraction Maximizes Throughput
- Broad Transmission Range

IR Diffusers feature an evenly fine ground first surface to produce even diffusion in the visible (VIS) and infrared (IR) spectra. Available in both ZnSe and CaF2 options with transmission ranges of 600nm-12000nm and 300nm-7000nm respectively, these diffusers can be used with a variety of coherent and incoherent light sources. The low index of refraction of calcium fluoride maximizes the throughput of these diffusers without use of an antireflection (AR) coating. IR Diffusers are ideal for use in laser calibration systems and general diffusion of VIS - IR light sources.

Technical Information

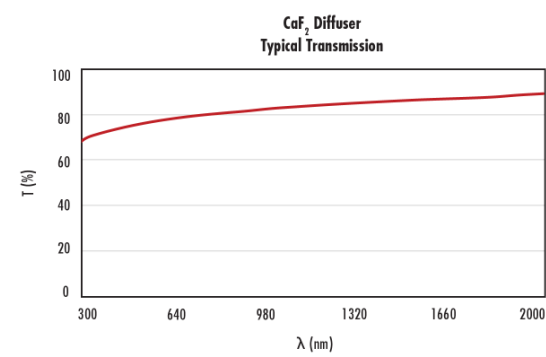

Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools