

TECHSPEC® 125mm Dia., Enhanced Aluminum, 4-6λ Mirror



Stock #18-928 **3 In Stock**

- 1 + MRP ₹8,324

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-5	₹8,324 each
Qty 6-25	₹6,457 each
Qty 26-49	₹5,953 each
Need More?	Request Quote

Product Downloads

General

Flat Mirror Type:

Physical & Mechanical Properties

125.00 +0.00/-0.25 Diameter (mm):

3.00 (nominal) Thickness (mm):

Clear Aperture CA (mm):
112.50

Edges:
Ground, 0.5mm Maximum Edge Chip

Optical Properties

Coating Type:
Metal

Coating:
Enhanced Aluminum (450-650nm)

Surface Flatness (P-V):
4 - 6λ

Wavelength Range (nm):
450 - 650

Substrate:
Float Glass

Coating Specification:
R_{avg} ≥95% @450 - 650nm @45°

Surface Quality:
60-40

Damage Threshold, By Design:
0.2 J/cm² @532nm, 10ns

Regulatory Compliance

RoHS 2015:
[Compliant](#)

Certificate of Conformance:
[View](#)

Reach 247:
[Compliant](#)

Country of Origin:
United States

Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91-80-6845 0000


Product Details

- Wide Variety of Shapes and Sizes Available
- Enhanced Aluminum, Protected Gold, and Protected Silver Coatings for high reflectivity from 450-10000nm
- [Contact Us](#) for Custom Sizes

TECHSPEC® First Surface Mirrors feature a high reflectivity coating deposited on the front surface of the glass substrate. The mirrors are available in enhanced aluminum, protected gold, and protected silver coatings for high reflectivity from 450-10000nm. The coated surface should be oriented to reflect incident light. TECHSPEC First Surface Mirrors are offered in circular, square, and rectangular dimensions. First surface mirrors are ideal for applications requiring the mirror to be mounted at 45° in order to produce a 90° bend in the light path. These first surface mirrors easily mount into a [range of optical mounts](#) to facilitate application integration.

Note: A range of mounts specifically compatible with individual TECHSPEC® First Surface Mirrors can be found on product web pages.

Technical Information

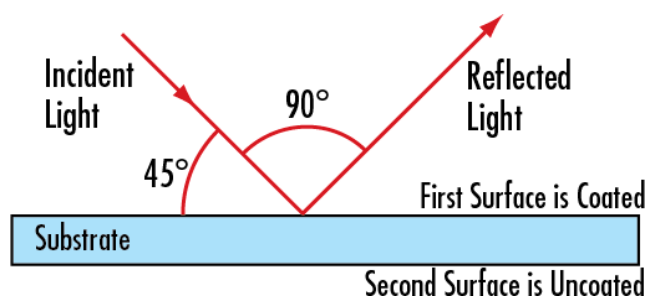

Coating Curves