See all 102 Products in Family

24.9mm Dia. x 17mm FL, Aspheric Condenser Lens

Stock **#19-516** CONTACT US

Other Coating Options

- 1 + **MRP** ₹4,339

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-10	**₹4,339** each
Qty 11-49	**₹3,834** each
Need More?	Request Quote

Product Downloads

General

Type:

Condenser Lens

Physical & Mechanical Properties

Diameter (mm):

24.90 +0.0/-0.2

Centering (arcmin):

≤30

Clear Aperture CA (mm):
22.41

Edge Thickness ET (mm):
1.90

Center Thickness CT (mm):
11.00 ±0.30

Bevel:
Protective as needed

Diameter of Asphere (mm):
24.9

Shape of Back Surface:
Plano

Optical Properties

Effective Focal Length EFL (mm):
17.00

Numerical Aperture NA:
0.73

Back Focal Length BFL (mm):
9.8

Substrate:
H-K51

Focal Length Tolerance (%):
±5

Coating:
Uncoated

Surface Quality:
80-50 (typical)

f/#:
0.68

Radius R_2 (mm):
∞

Wavelength Range (nm):
350 - 2000

Conjugate Distance:
Infinite

Regulatory Compliance

Certificate of Conformance:
View

Country of Origin:
China

Imported By:
Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91- 80-6845 0000

Product Details

- Molded Illumination Lenses
- Aspheric or Spherical Designs
- High Numerical Apertures

Condenser Lenses are molded lenses designed for illumination applications. Featuring large apertures and short focal lengths, Condenser Lenses are commonly used in emitter-detector applications, projection applications, or condensing illumination applications such as Koehler Illumination. The Aspheric Condenser Lenses are molded on the aspheric surface and ground and polished on the opposite face, offering superior performance. The Plano-Convex (PCX) Condenser Lenses are molded on both surfaces, offering excellent value.

Technical Information

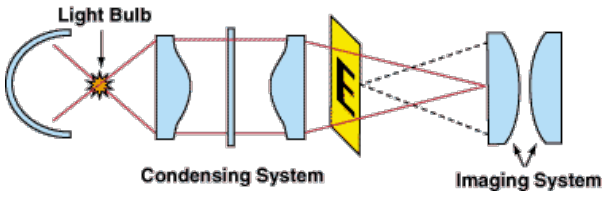

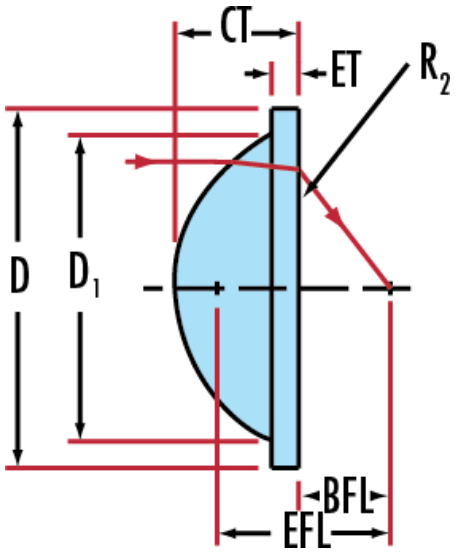
CT
ET
R2
D
D1
BFL
EFL

;