

[See all 157 Products in Family](#)

**TECHSPEC® 25 x 25mm 40R/60T, NIR Plate Beamsplitter**



Visible and NIR Plate Beamsplitters

Stock #68-388 **17 In Stock**

⊖ 1 ⊕ ₹15,570

**ADD TO CART**

Volume Pricing	
Qty 1-5	₹15,570 each
Qty 6-25	₹12,150 each
Qty 26-99	₹11,160 each
Need More?	<a href="#">Request Quote</a>

Product Downloads

**General**

**Note:**  
Beamsplitter-coated side is marked with a black dot

**Type:**  
Standard Beamsplitter

**Physical & Mechanical Properties**

**Clear Aperture (%):**  
>85



Plate	<b>Construction:</b>
25.0 x 25.0 +0.0/-0.25	<b>Dimensions (mm):</b>
Cut with 0.25mm maximum edge chip	<b>Edges:</b>
≤3	<b>Parallelism (arcmin):</b>
3.00 ±0.25	<b>Thickness (mm):</b>
<b>Optical Properties</b>	
45	<b>Angle of Incidence (°):</b>
Surface 1: 40/60 ±5% @ 900nm, ±10% @ 700 - 1100nm Surface 2: AR R <sub>avg</sub> ≤1%, R <sub>abs</sub> ≤2% @ 700 - 1100nm	<b>Coating Specification:</b>
40/60	<b>Reflection/Transmission Ratio (R/T):</b>
N-BK7	<b>Substrate:</b> <input type="checkbox"/>
1λ per inch	<b>Surface Flatness (P-V):</b>
60-40	<b>Surface Quality:</b>
700 - 1100	<b>Wavelength Range (nm):</b>
<b>Regulatory Compliance</b>	
Compliant	<b>RoHS 2015:</b>
View	<b>Certificate of Conformance:</b>
Compliant	<b>Reach 247:</b>

## Product Details

- Many Beamsplitting Ratios Available
- Visible and NIR Coating Options Offered
- Multi-Layer AR Coated Second Surface
- [C-Mounted Plate Beamsplitters](#) Also Available

TECHSPEC® Visible and NIR Plate Beamsplitters are ideal for dual magnification [imaging](#) systems and for combining low power [laser](#) beams. These beamsplitters offer the optimum combination of polished, high-quality optical-grade glass with minimum substrate thickness. The broadband dielectric coatings provide maximum throughput, are ideal for minimizing ghost images, and have much less energy loss than metallic coatings. TECHSPEC® Visible and NIR Plate Beamsplitters are coated on their back surfaces with a multi-layer anti-reflection (AR) coating, reducing back reflections to less than 1.0% for each wavelength range. Note that for easy identification, the coated side of the beamsplitter is marked with a black dot.

## Technical Information

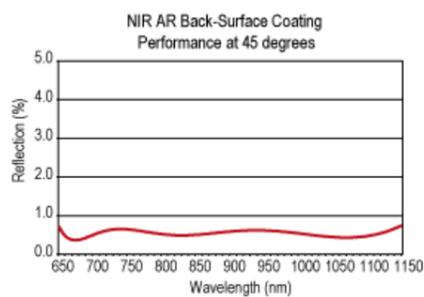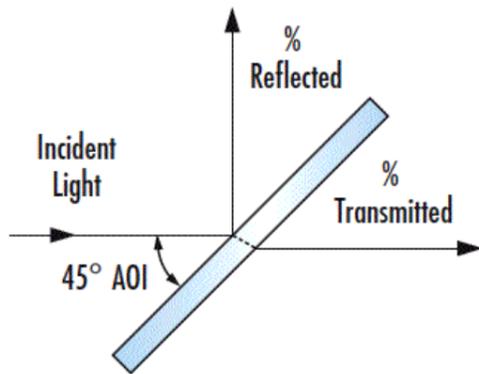

## Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

## Compatible Mounts

---