See all 125 Products in Family

25.4mm Dia. 1064nm λ/2 Quartz Waveplate Zero Order

Stock **#14-288** CONTACT US

- 1 + **MRP** ₹54,986

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-5	**₹54,986** each
Qty 6+	**₹44,392** each
Need More?	Request Quote

Product Downloads

General

Type:
Crystalline Waveplate

Configuration:
Air Spaced

Physical & Mechanical Properties

Clear Aperture CA (mm):
20.00

Diameter (mm):

25.40 +0.00/-0.25

Thickness (mm):

6.00 +0.00/-0.25

Construction:

Crystalline

Parallelism (arcsec):

<3

Optical Properties

Coating:

Laser V-Coat (1064nm)

Design Wavelength DWL (nm):

1064

Substrate:

Crystal Quartz

Retardance:

λ/2

Surface Quality:

10-5

Transmitted Wavefront, P-V:

λ/10

Retardance Tolerance:

±λ/300

Temperature Coefficient (λ/°C):

0.0001

Coating Specification:

R_{abs} <0.2% @ 1064nm

Retardance Order:

0

Regulatory Compliance

RoHS 2015:

Compliant

Certificate of Conformance:

View

Reach 247:

Compliant

Country of Origin:

China

Imported By:

Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91- 80-6845 0000

Product Details

- Zero Order and Multiple Order Waveplates
- λ/4 and λ/2 Retardance
- Mounted in Black Anodized Aluminum Frame
- **Zero Order Polymer Waveplates** Also Available

Quartz Waveplates (Retarders) are available in multiple order and zero order. These waveplates are ideal for a range of applications. Multiple order waveplates are ideal for applications where the wavelength deviates less than ±1% from the design wavelength of the waveplate. For applications with a greater than ±1% deviation, zero order waveplates are recommended due to their increased bandwidth and lower sensitivity to temperature change. Quartz Waveplates (Retarders) have the fast axis marked on the edge of the mount to ease system integration.

Technical Information

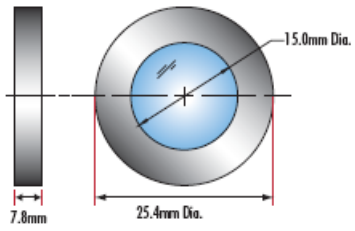
15.0mm Dia.
7.8mm
25.4mm Dia.

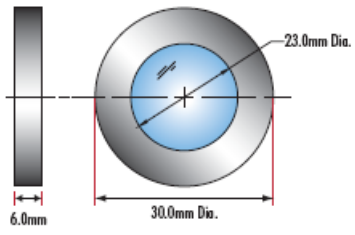
23.0mm Dia.
6.0mm
30.0mm Dia.

;