

25mm Dia., 488nm Laser Line Longpass Filter



Laser Line Longpass Filters

Stock **#47-503** **1 In Stock**

MRP ₹93,088

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1+	₹93,088 each
Need More?	Request Quote

Product Downloads

General

Longpass Filter **Type:**

Angle Tuning Range, for 0 - 8° Shift:
-0.3% of Laser Wavelength

Bandwidth (nm): >600 **Note:**

Physical & Mechanical Properties

25.00 +0.0/-0.1 **Diameter (mm):**

22 Clear Aperture CA (mm):

88 Clear Aperture (%):

Optical Properties

0 ±2 Angle of Incidence (°):

>600 Bandwidth (nm):

394 - 488 OD 6 Blocking Wavelength Range (nm):

≥6.0 Optical Density OD (Average):

488 Design Wavelength DWL (nm):

Fused Silica (Corning 7980) Substrate:

Hard Coated Coating:

60-40 Surface Quality:

93.00 Transmission (%):

494.3 - 1100.8 Transmission Wavelength (nm):

2.40 Edge Steepness (nm):

<4.9 Transition Width (nm):

488 Laser Blocking Wavelength (nm):

0.5 J/cm² @ 266nm, 10ns, 10Hz
1 J/cm² @ 532nm, 10ns, 10Hz Damage Threshold, By Design:

Threading & Mounting

3.5 Mount Thickness (mm):

Environmental & Durability Factors

Environmental: ML-STD-810F, Physical: ML-C-48497A Durability:

<5 Temperature Dependence (ppm/°C):

Regulatory Compliance

Compliant RoHS 2015:

Compliant Reach 209:

View Certificate of Conformance:

United States Country of Origin:


Edmund Optics India Private Limited
267, Greystone Building, Second Floor,
6th Cross Rd, Binnamangala,
Stage 1, Indiranagar, Bengaluru,
Karnataka, India 560038
Phone: +91- 80-6845 0000 Imported By:

Product Details

- Up to 93% Transmission to Detect Weak Signals
- Deep > OD 6 Blocking for Maximum Laser Rejection
- Ideal for Raman Spectroscopy, Confocal Microscopy, and Biotech Instrumentation
- Unrivaled Performance and Lifetime

Our Laser Line Longpass filters offer unprecedented performance in longpass laser edge filter applications. The steep edges (measured from an optical density of 6.0 to a transmission of 50%) make it possible to measure even the smallest Raman shifts, making these filters a superior alternative to costly holographic notch filters for Stokes Raman scattering measurements. Compared to notch filters, these edge filters offer better transmission, higher laser line blocking, and steeper edges, permitting measurement of Raman signals extremely close to the laser line. The large bandwidths and exceptional transmission permit these filters to be used in even the most demanding imaging applications.

Technical Information

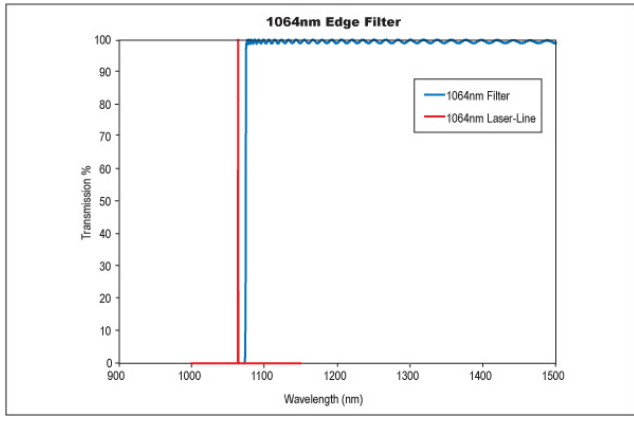

Compatible Mounts
