


[See all 3 Products in Family](#)

## 25mm Dia., Low GDD 940/1030nm Yb-Doped Dichroic Mirrors

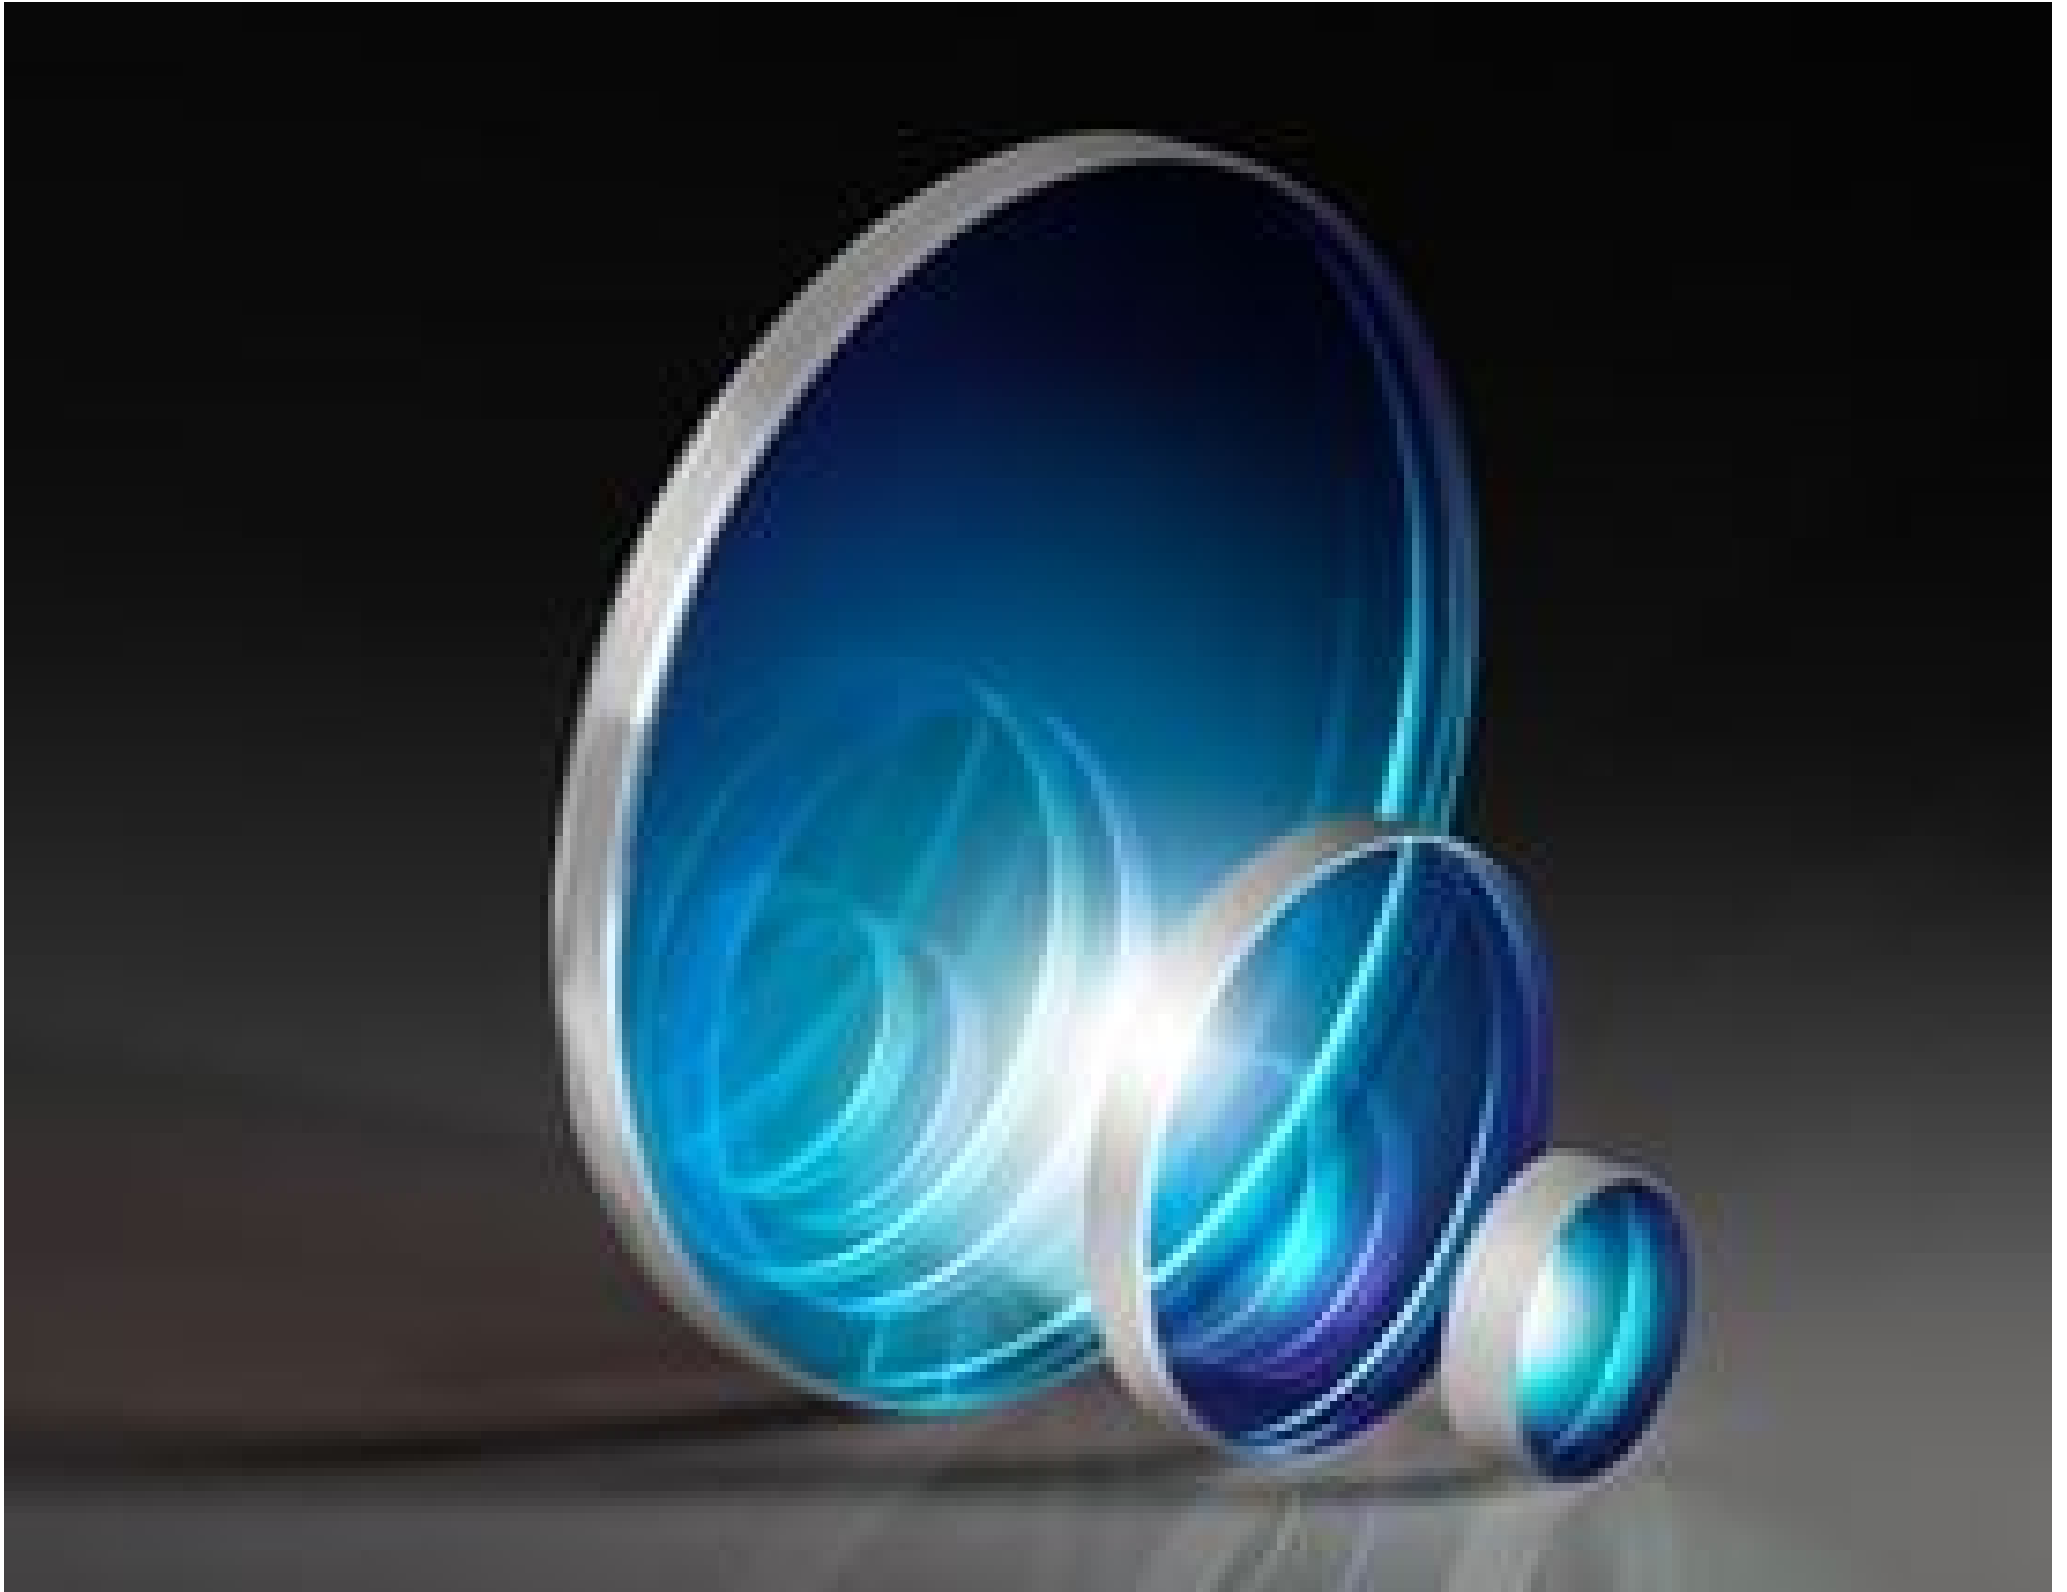

Yb-Doped Dichroic Mirrors

Stock #28-972 **2 In Stock**

- 1 + MRP ₹59,021

Price inclusive of all taxes

**ADD TO CART**

Volume Pricing	
Qty 1-5	₹59,021 each
Qty 6-25	₹50,143 each
Need More?	<a href="#">Request Quote</a>

### Product Downloads

#### General

High Power Dichroic Window **Type:**

#### Physical & Mechanical Properties

3.00 ±0.20 **Thickness (mm):**

22.50 **Clear Aperture CA (mm):**

25.00 +0.0/-0.10 **Diameter (mm):**

Fine Ground **Edges:**

30' ±10' **Wedge Angle (arcmin):**

## Optical Properties

Fused Silica (Corning 7980) **Substrate:** □

1.458 **Index of Refraction (n<sub>d</sub>):**

10-5 **Surface Quality:**

0 - 5 **Angle of Incidence (°):**

S1: HR 1030nm ± 5nm, AR 940 ± 5nm  
S2: AR 940nm & 1030nm ± 5nm **Coating:**

940nm/1030nm **Design Wavelength DWL (nm):**

λ/10 **Surface Flatness (P-V):**

S1: R<sub>p</sub> & R<sub>s</sub> >99.5% @ 1030nm;  
T<sub>p</sub> & T<sub>s</sub> >98% @ 940nm @ 0 – 5° AOI  
S2: T<sub>p</sub> & T<sub>s</sub> >98% @ 940nm & 1030nm **Coating Specification:**

> 20 J/cm<sup>2</sup> @ 10ns pulses @ 5 kHz PRF  
1MW/cm<sup>2</sup> CW **Damage Threshold, Reference:** □

## Regulatory Compliance

[View](#) **Certificate of Conformance:**

United States **Country of Origin:**

Edmund Optics India Private Limited  
267, Greystone Building, Second Floor,  
6th Cross Rd, Binnamangala,  
Stage 1, Indiranagar, Bengaluru,  
Karnataka, India 560038  
Phone: +91- 80-6845 0000 **Imported By:**

## Product Details

- High Reflectivity at 1030nm and High Transmission at 940nm
- Low Group Delay Dispersion (GDD) <±100fs<sup>2</sup>
- Dichroic Mirror Ideal for Ytterbium (Yb) Lasers

Yb-Doped Dichroic Mirrors feature a high reflectivity of 99.5% at 1030nm and transmission of 98% at 940nm with wide acceptance angles of 0 – 5°. Featuring wedged substrates that minimize back reflections even at 0° AOI, these mirrors eliminate unwanted feedback in laser systems and are available in either 12.5, 25, or 50mm diameters with a thickness of 3mm. Designed for high power applications utilizing nanosecond pulses, these mirrors are ideal for precision material processing. Yb-Doped Dichroic Mirrors also offer a Low Group Delay Dispersion (GDD) of <±100fs<sup>2</sup> from 1030nm – 1080nm, making them useful for ultrafast and nonlinear applications including multi-photon microscopy.