

## 3.0 OD 75 x 75mm Neutral Density Filter



Stock #53-707 **20+ In Stock**

- 1 + MRP ₹25,424

● Price inclusive of all taxes

**ADD TO CART**

Volume Pricing	
Qty 1-10	₹25,424 each
Qty 11-49	₹21,288 each
Need More?	<a href="#">Request Quote</a>

### Product Downloads

### General

Neutral Density Filter **Type:**

### Physical & Mechanical Properties

75 x 75 (Nominal) **Dimensions (mm):**

75.00 **Length (mm):**

**Width (mm):**

## Optical Properties

3.0 **Optical Density OD (Average):**

Wratten 2

**Substrate:**

Uncoated

**Coating:**

0.1

**Transmission (%):**

400 - 700

**Blocking Wavelength Range (nm):**

## Regulatory Compliance

**Compliant**

**RoHS 2015:**

**Compliant**

**Reach 223:**

**View**

**Certificate of Conformance:**

United States

**Country of Origin:**

**Imported By:**

Edmund Optics India Private Limited  
267, Greystone Building, Second Floor,  
6th Cross Rd, Binnamangala,  
Stage 1, Indiranagar, Bengaluru,  
Karnataka, India 560038  
Phone: +91- 80-6845 0000

## Product Details


Storage in humid environments can cause the filters to cloud and temperatures should not exceed 50°C for extended periods. Every 0.3 density increment equals one f-stop.

- Available in Large Sizes
- Easily Cut for Custom Sizing
- Kodak Filter No. 96

Kodak Wratten 2 Neutral Density Filters are used in image forming optical systems to reduce light intensity across the visible spectrum without altering the spectral profile. These ND filters feature tolerances of  $\pm 10\%$  of the nominal diffuse density. Although the filters transmit the infrared spectrum, neutrality is controlled only in the visible spectrum. Kodak Wratten 2 Neutral Density Filters are uncoated and have a blocking wavelength range of 400-700nm. All ND filters are 0.1mm in thickness and can be cut for easy custom sizing.

**Note:** Storage in humid environments can cause the filters to cloud and temperatures should not exceed 50°C for extended periods. Every 0.3 density increment equals one f-stop.

## Technical Information

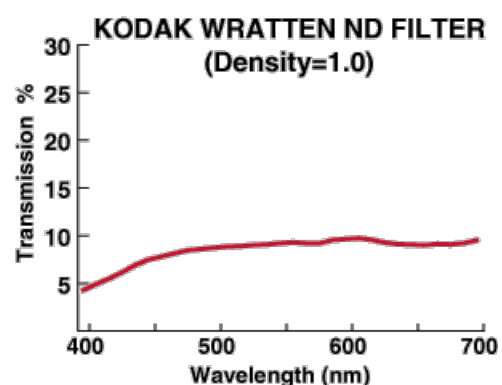

## Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools