


[See all 68 Products in Family](#)

TECHSPEC® 30mm Dia., 1mm Thick, Uncoated, B270 Window

See More by [SCHOTT Optical Components](#)

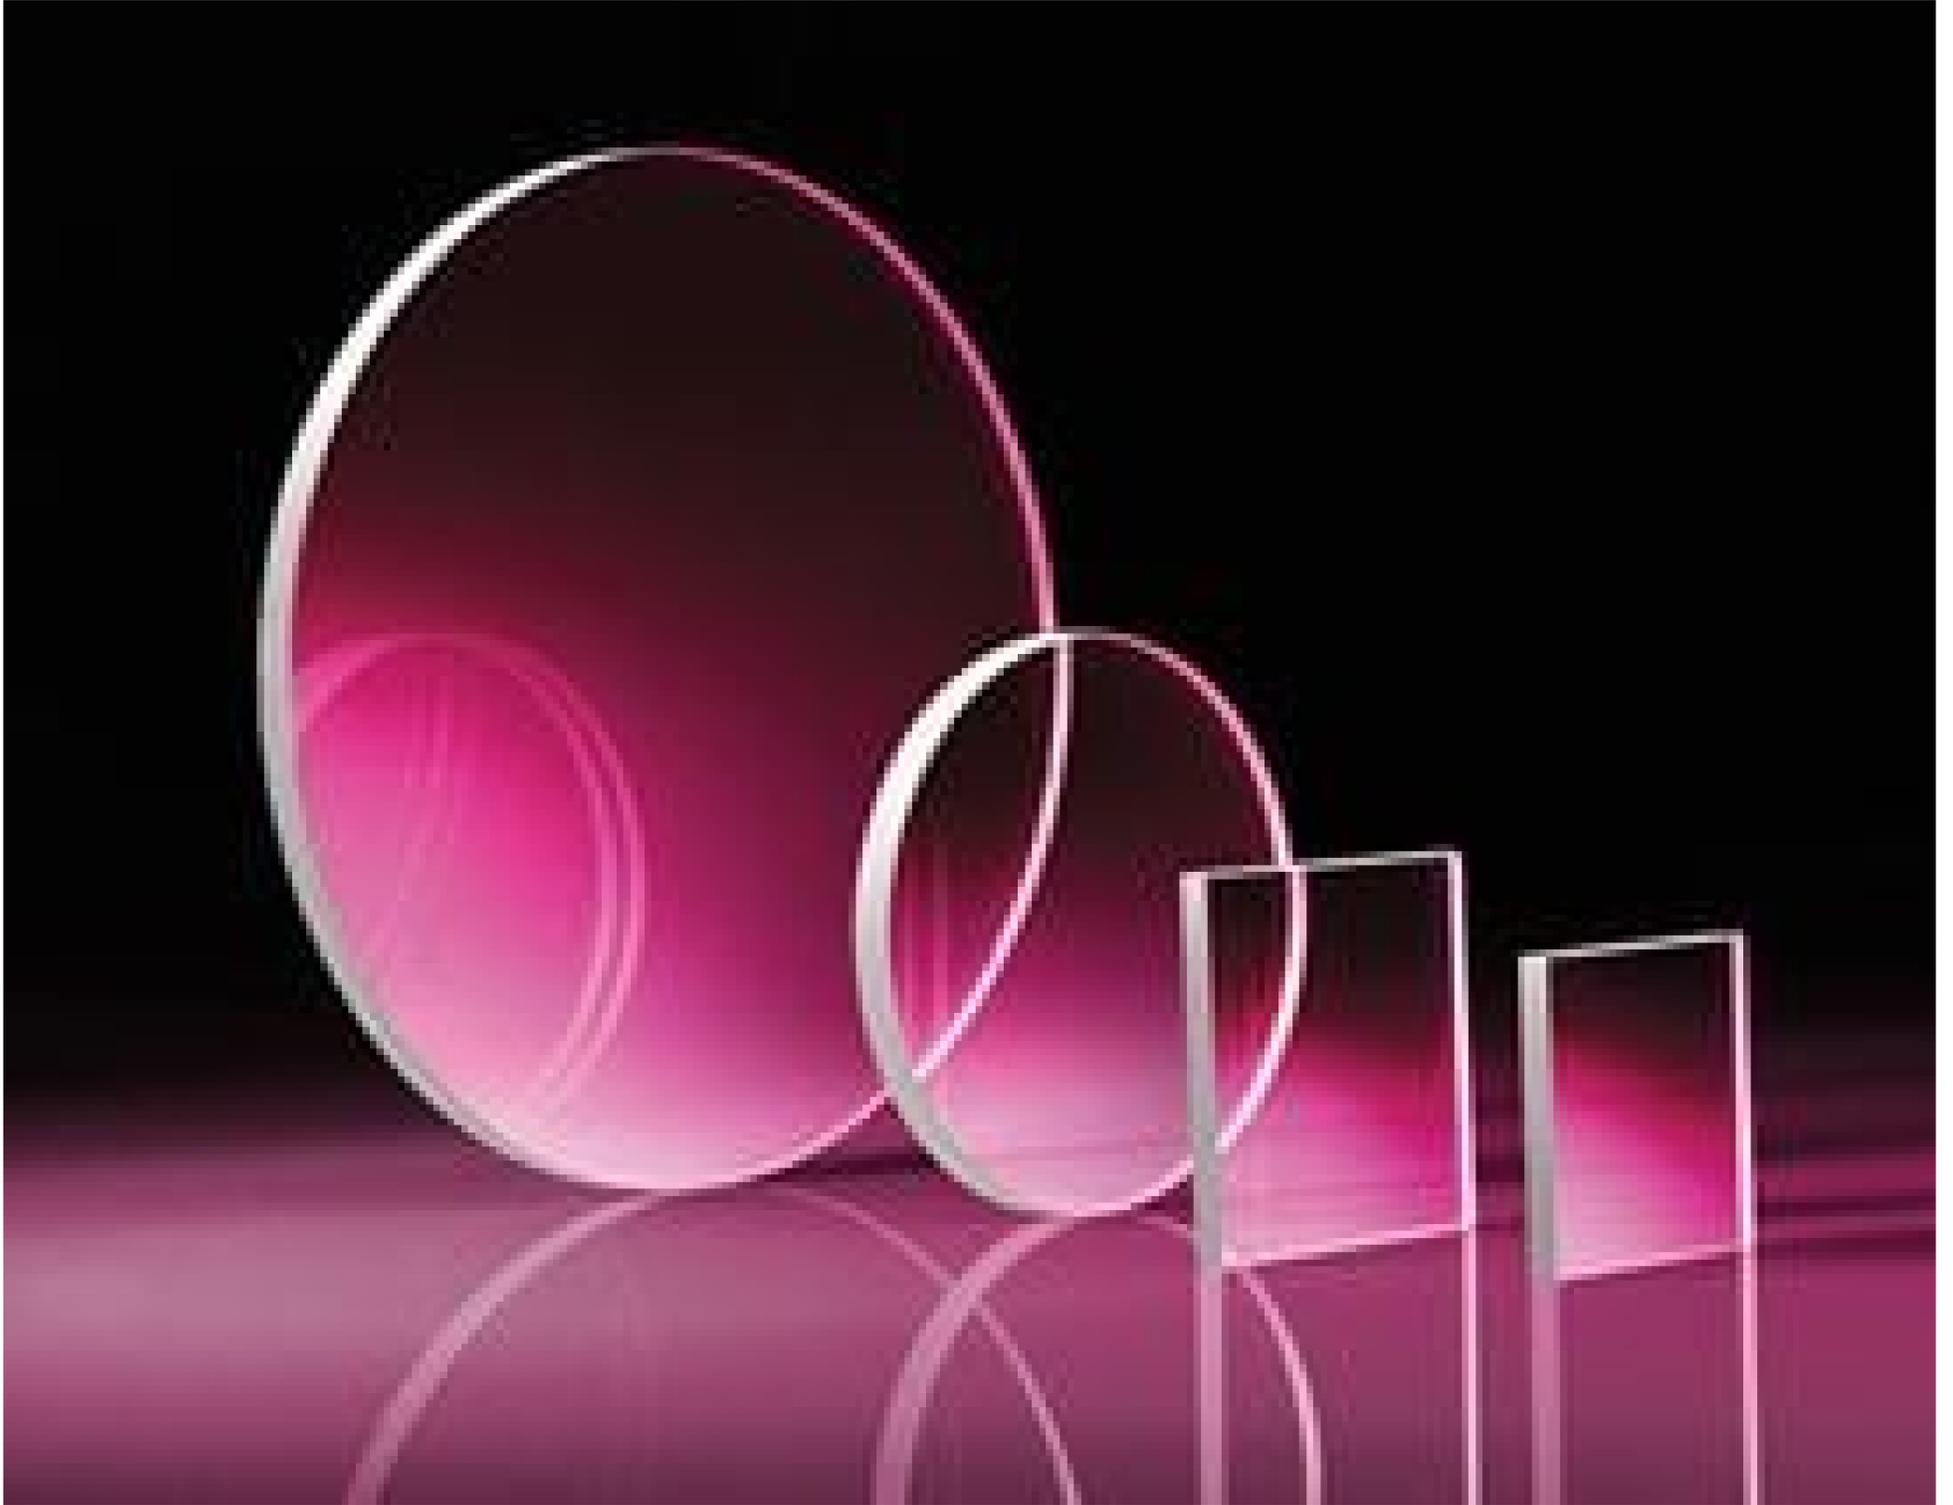

Stock #17-166 **20+ In Stock**

₹2,897

ADD TO CART

Volume Pricing	
Qty 1-5	₹2,897 each
Qty 6-25	₹2,311 each
Qty 26-99	₹2,164 each
Need More?	Request Quote

Product Downloads

38.00 #Sorting:

General

Protective Window Type:

Physical & Mechanical Properties

27.00 Clear Aperture CA (mm):

30.00 +0.00/-0.25	Diameter (mm):
1.00 ±0.10	Thickness (mm):
Protective as needed	Bevel:
Fine Ground	Edges:
0.22	Poisson's Ratio:
71.5	Young's Modulus (GPa):
500.00	Knoop Hardness (kg/mm²):

Optical Properties

Uncoated	Coating:
B270	Substrate: □
1.523	Index of Refraction (n_d):
60-40	Surface Quality:
58.3	Abbe Number (v_d):
360 - 2700	Wavelength Range (nm):
1λ (per 25.4mm Dia. within CA)	Surface Flatness (P-V):

Material Properties

2.56	Density (g/cm³):
9.4 (+20 to +300°C)	Coefficient of Thermal Expansion CTE (10⁻⁶/°C):

Regulatory Compliance


Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 247:
United States	Country of Origin:
Edmund Optics India Private Limited	Imported By:

Product Details

- Large Selection of Sizes
- Available Uncoated, MgF₂, or VIS-NIR Anti-Reflection (AR) Coated
- Custom Sizes Available for Volume OEM Requirements

TECHSPEC® B270 Windows offer a high transmission from the visible to the near-infrared (NIR). They have a similar refractive index to N-BK7 while being more cost-effective. These windows are often used as a protective element due to their high solarization stability and chemical resistance, making them ideal for standard window applications. TECHSPEC® B270 Windows are available either uncoated or coated with a MgF₂ or VIS-NIR Anti-Reflection (AR) Coating. Both circular and square options are offered in various sizes, and custom sizes and coatings are available for OEM applications.

Technical Information

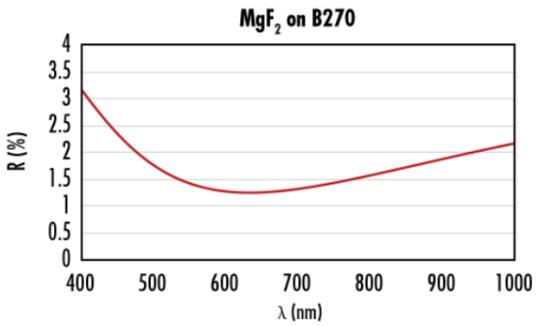

Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).
