

850nm, 6 x 6mm, OD 2.0 Longpass Filter



OD 2.0 Longpass Filters

Stock #15-207 **20+ In Stock**

MRP ₹5,045

Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-9	₹5,045 each
Qty 10-25	₹4,541 each
Qty 26-49	₹4,237 each
Need More?	Request Quote

Product Downloads

General

Longpass Filter **Type:**

Physical & Mechanical Properties

6.00 x 6.00 +0.00/-0.20 **Dimensions (mm):**

Length (mm):

6.00	Thickness (mm):
2.00 ±0.10	Width (mm):
6.00	Clear Aperture (%):
90	Physical Durability:
ML-C-48497A, Section 3.4.1	

Optical Properties	
0	Angle of Incidence (°):
≥2.0	Optical Density OD (Average):
850.00 ±17	Cut-On Wavelength (nm):
BOROFLOAT®	Substrate: <input type="checkbox"/>
Hard Coated	Coating:
600 - 810	Rejection Wavelength (nm):
60-40	Surface Quality:
≥85	Transmission (%):
890 - 1600	Transmission Wavelength (nm):
600 - 1600	Wavelength Range (nm):

Environmental & Durability Factors	
Environmental Durability:	
ML-STD-810F, Section 507.4	

Regulatory Compliance	
Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 253:
United States	Country of Origin:
Imported By:	
Edmund Optics India Private Limited 267, Greystone Building, Second Floor, 6th Cross Rd, Binnamangala, Stage 1, Indiranagar, Bengaluru, Karnataka, India 560038 Phone: +91- 80-6845 0000	

Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume


Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

Product Details

- Sharp Cut-On Wavelength
- ≥85% Transmission and OD 2.0 Blocking
- 6mm Square or 12.5/25mm Diameter Sizes
- **TECHSPEC® OD 4.0 Longpass Filters** Also Available

OD 2.0 Longpass Filters are cost-effective filters with cut-on wavelengths ranging from 400 to 950nm. These longpass filters provide ≥85% transmission across a transmission band that extends out to 1600nm while providing OD 2.0 blocking across their rejection band. The back surface of each filter is coated with an antireflection (AR) coating, increasing the overall efficiency of the filter. OD 2.0 Longpass Filters can be combined with OD 2.0 Shortpass Filters to create custom bandpass filters to meet application requirements in the visible or near-infrared. These longpass filters are ideal for use in fluorescence applications or separating spectral orders, with the 6 x6mm sized filters suitable for integration into optical instrumentation requiring cost-effective, lightweight filters.

Technical Information

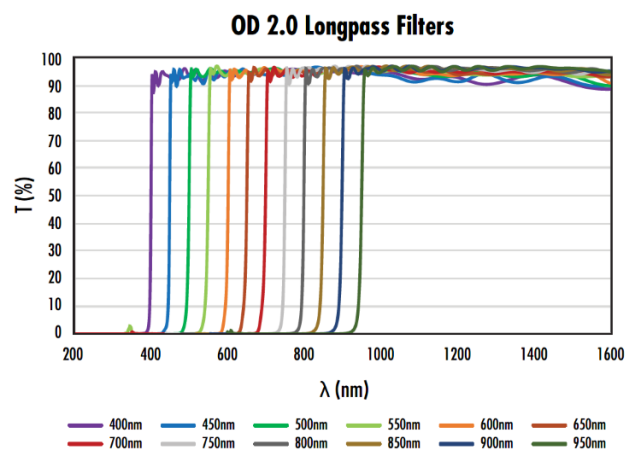

Compatible Mounts