

[See all 164 Products in Family](#)

TECHSPEC<sup>®</sup> 9mm Dia. x 36mm FL YAG-BBAR Coated, Inked, Double-Convex Lens



YAG-BBAR Coated Double-Convex (DCX) Lenses



Stock #89-227-INK

CONTACT US

-

1

+

₹4,905

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-9        | ₹4,905 each                   |
| Qty 10-24      | ₹4,410 each                   |
| Qty 25-99      | ₹3,938 each                   |
| Need More?     | <a href="#">Request Quote</a> |

Product Downloads

General

Type:

Double-Convex Lens

Physical & Mechanical Properties

Diameter (mm):

9.00 ±0.025

|                                                                                                              |                                             |
|--------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| <1                                                                                                           | Centering (arcmin):                         |
| Protective as needed                                                                                         | Bevel:                                      |
| 2.55                                                                                                         | Center Thickness CT (mm):                   |
| ±0.05                                                                                                        | Center Thickness Tolerance (mm):            |
| 2.00                                                                                                         | Edge Thickness ET (mm):                     |
| 8.1                                                                                                          | Clear Aperture CA (mm):                     |
| Optical Properties                                                                                           |                                             |
| 35.15                                                                                                        | Back Focal Length BFL (mm):                 |
| 36.00                                                                                                        | Effective Focal Length EFL (mm):            |
| YAG-BBAR (500-1100nm)                                                                                        | Coating:                                    |
| R <sub>abs</sub> <0.25% @ 532nm<br>R <sub>abs</sub> <0.25% @ 1064nm<br>R <sub>avg</sub> <1.0% @ 500 - 1100nm | Coating Specification:                      |
| N-BK7                                                                                                        | Substrate: □                                |
| 40-20                                                                                                        | Surface Quality:                            |
| 36.77                                                                                                        | Radius R <sub>1</sub> =R <sub>2</sub> (mm): |
| 4.00                                                                                                         | f/#:                                        |
| 587.6                                                                                                        | Focal Length Specification Wavelength (nm): |
| ±1                                                                                                           | Focal Length Tolerance (%):                 |
| 0.13                                                                                                         | Numerical Aperture NA:                      |
| 350 - 2200                                                                                                   | Wavelength Range (nm):                      |
| Regulatory Compliance                                                                                        |                                             |
| View                                                                                                         | Certificate of Conformance:                 |
| Japan                                                                                                        | Country of Origin:                          |
| Edmund Optics India Private Limited                                                                          | Imported By:                                |

## Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

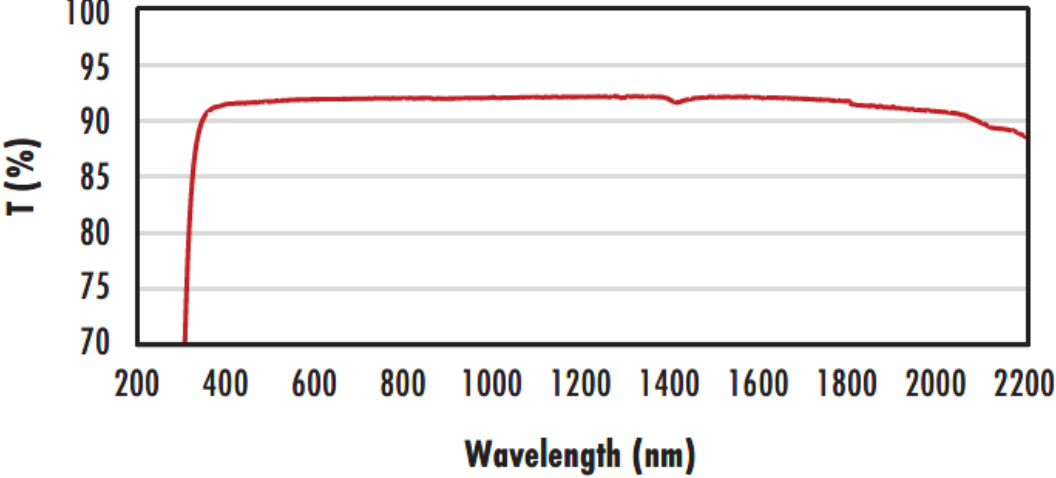
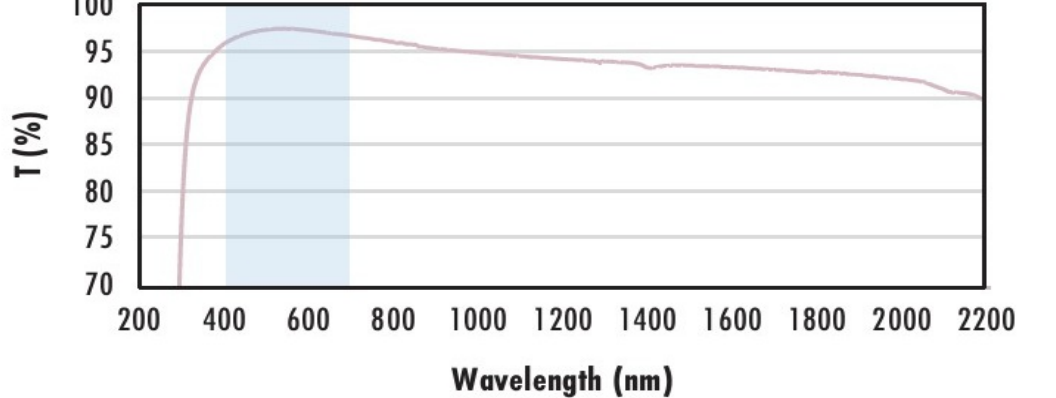
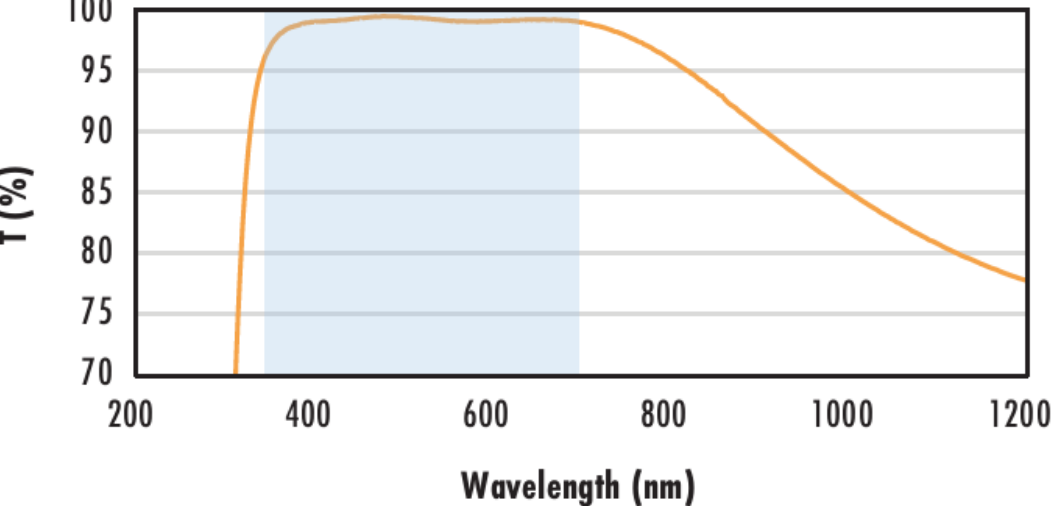
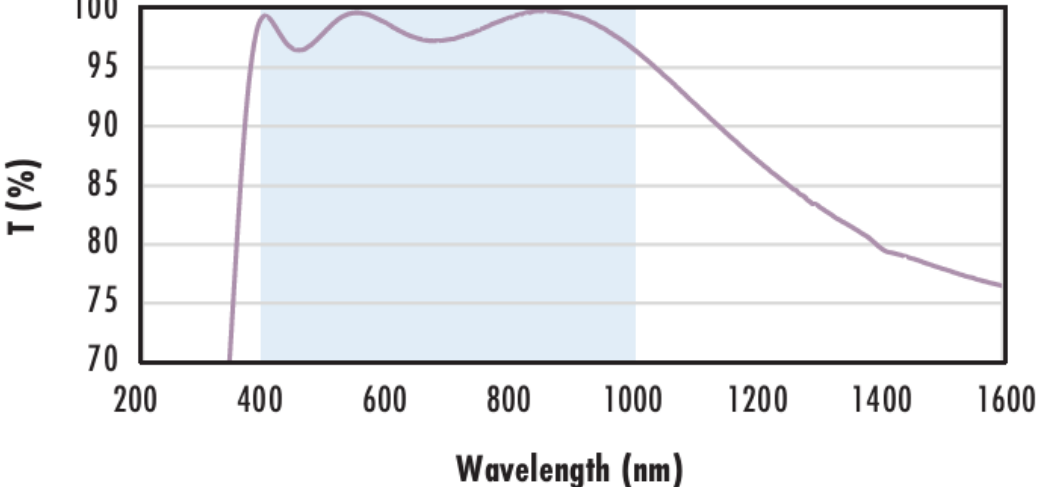
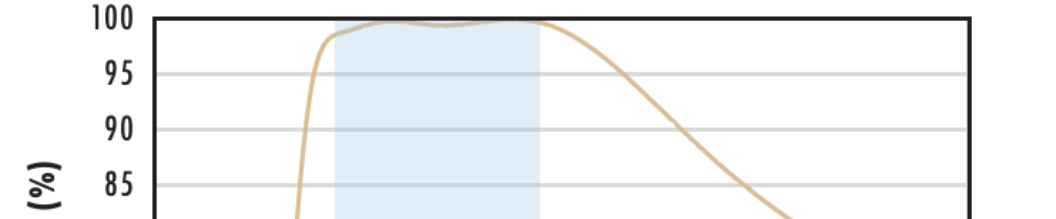
Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

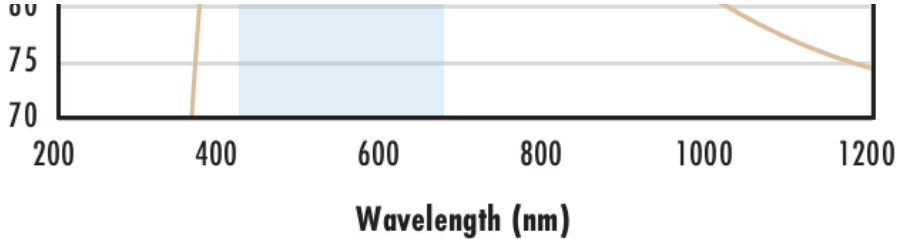
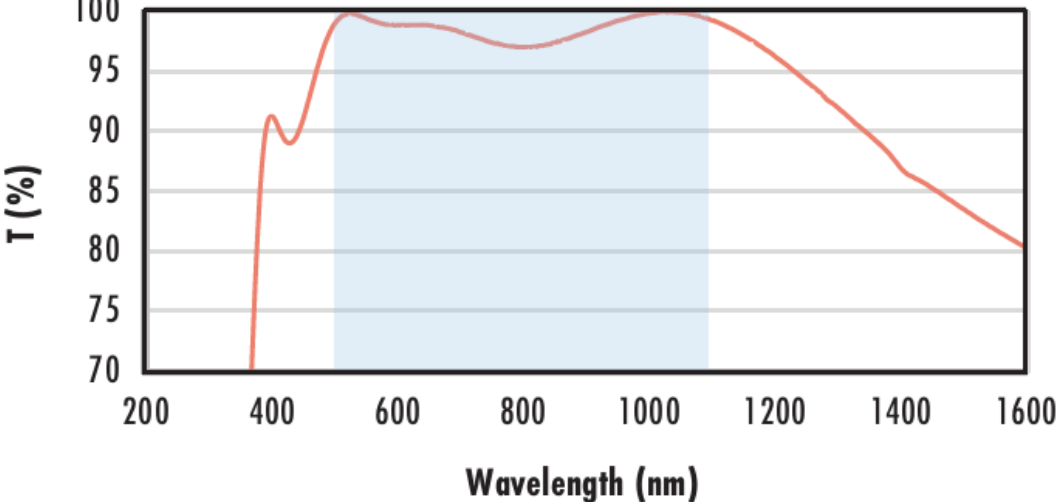
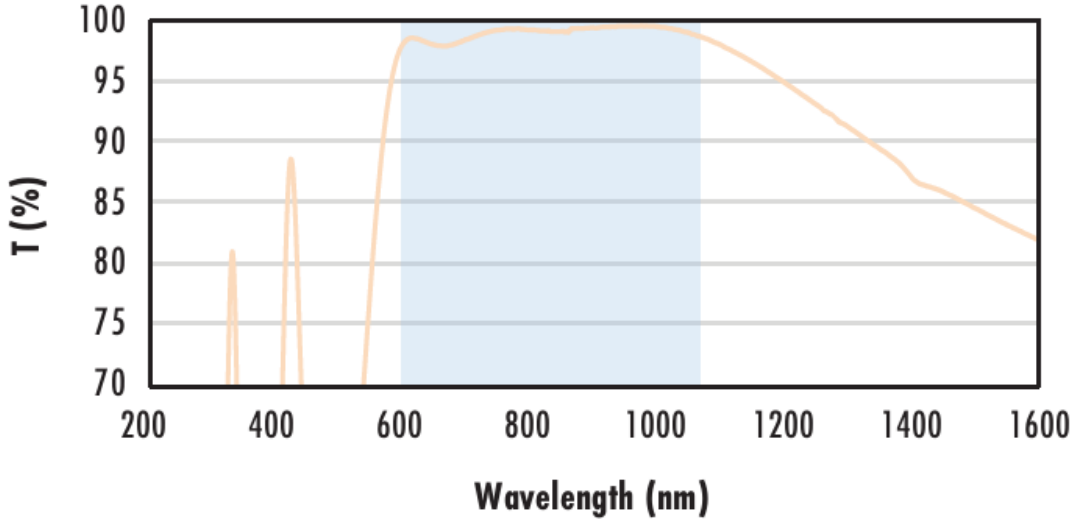
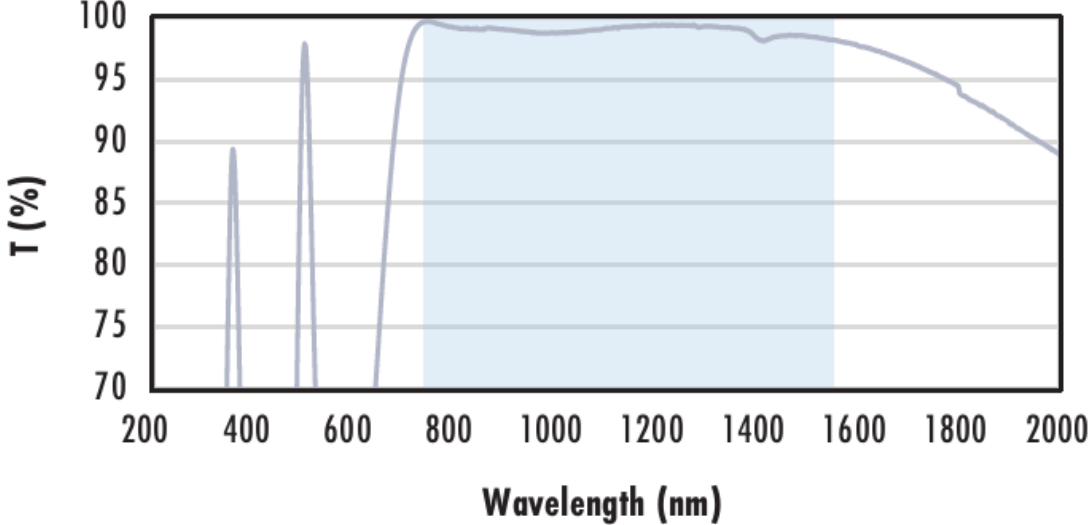
## Product Details

- Optimized for R<0.25% @ 532nm and 1064nm
- Minimize Aberrations Including Spherical and Coma
- [UV Fused Silica DCX Lenses](#) Available
- Other Coating Options Available: [Uncoated](#), [MgF<sub>2</sub>](#), [VIS 0°](#), [NIR I](#), [NIR II](#), [VIS-EXT](#), and [VIS-NIR](#)

TECHSPEC® YAG-BBAR Coated Double-Convex (DCX) Lenses, also referred to as bi-convex lenses, have two positive, symmetrical faces with equal radii on both sides. These lenses are generally recommended for finite imaging applications with a conjugate ratio (ratio between object distance and image distance) between 0.2 and 5. At a conjugate ratio of 1, aberrations such as spherical aberration, chromatic aberration, coma, and distortion are minimized or cancelled due to the symmetric lens design. TECHSPEC YAG-BBAR Coated Double-Convex Lenses are available in a variety of substrates and coating options for the visible and NIR spectra.

## Technical Information

|                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| N-BK7                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <div data-bbox="262 201 1249 727"><h3>Uncoated N-BK7 Typical Transmission</h3></div>                       | <div data-bbox="1339 409 1841 498"><p>Typical transmission of a 3mm thick, uncoated N-BK7 window across the UV - NIR spectra.</p><p><a href="#">Click Here to Download Data</a></p></div>                                                                                                                                                                                                                                                                                                                                                                             |
| <div data-bbox="262 795 1249 1276"><h3>N-BK7 with MgF<sub>2</sub> Coating Typical Transmission</h3></div> | <div data-bbox="1339 884 1841 1136"><p>Typical transmission of a 3mm thick N-BK7 window with MgF<sub>2</sub> (400-700nm) coating at 0° AOI.</p><p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p><p><math>R_{avg} \leq 1.75\% @ 400 - 700\text{nm}</math> (N-BK7)</p><p>Data outside this range is not guaranteed and is for reference only.</p><p><a href="#">Click Here to Download Data</a></p></div>                                                                                                  |
| <div data-bbox="262 1317 1249 1899"><h3>N-BK7 with VIS-EXT Coating Typical Transmission</h3></div>       | <div data-bbox="1339 1478 1841 1730"><p>Typical transmission of a 3mm thick N-BK7 window with VIS-EXT (350-700nm) coating at 0° AOI.</p><p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p><p><math>R_{avg} \leq 0.5\% @ 350 - 700\text{nm}</math></p><p>Data outside this range is not guaranteed and is for reference only.</p><p><a href="#">Click Here to Download Data</a></p></div>                                                                                                                  |
| <div data-bbox="262 1958 1249 2522"><h3>N-BK7 with VIS-NIR Coating Typical Transmission</h3></div>       | <div data-bbox="1339 2071 1841 2389"><p>Typical transmission of a 3mm thick N-BK7 window with VIS-NIR (400-1000nm) coating at 0° AOI.</p><p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p><p><math>R_{abs} \leq 0.25\% @ 880\text{nm}</math><br/><math>R_{avg} \leq 1.25\% @ 400 - 870\text{nm}</math><br/><math>R_{avg} \leq 1.25\% @ 890 - 1000\text{nm}</math></p><p>Data outside this range is not guaranteed and is for reference only.</p><p><a href="#">Click Here to Download Data</a></p></div> |
| <div data-bbox="262 2564 1249 2878"><h3>N-BK7 with VIS 0° Coating Typical Transmission</h3></div>        | <div data-bbox="1339 2703 1841 2893"><p>Typical transmission of a 3mm thick N-BK7 window with VIS 0° (425-675nm) coating at 0° AOI.</p><p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p><p><math>R_{avg} \leq 0.4\% @ 425 - 675\text{nm}</math></p><p>Data outside this range is not guaranteed and is for reference</p></div>                                                                                                                                                                           |

|                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                             | <p>only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <p><b>N-BK7 with YAG-BBAR Coating</b><br/><b>Typical Transmission</b></p>  | <p>Typical transmission of a 3mm thick N-BK7 window with YAG-BBAR (500-1100nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 0.25\% @ 532nm</math><br/><math>R_{abs} \leq 0.25\% @ 1064nm</math><br/><math>R_{avg} \leq 1.0\% @ 500 - 1100nm</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>           |
| <p><b>N-BK7 with NIR I Coating</b><br/><b>Typical Transmission</b></p>   | <p>Typical transmission of a 3mm thick N-BK7 window with NIR I (600 - 1050nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{avg} \leq 0.5\% @ 600 - 1050nm</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                       |
| <p><b>N-BK7 with NIR II Coating</b><br/><b>Typical Transmission</b></p>  | <p>Typical transmission of a 3mm thick N-BK7 window with NIR II (750 - 1550nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 1.5\% @ 750 - 800nm</math><br/><math>R_{abs} \leq 1.0\% @ 800 - 1550nm</math><br/><math>R_{avg} \leq 0.7\% @ 750 - 1550nm</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p> |

Compatible Mounts