


[See all 3 Products in Family](#)

LaKL21 25.4 x 25.4mm Ultrafast Prism

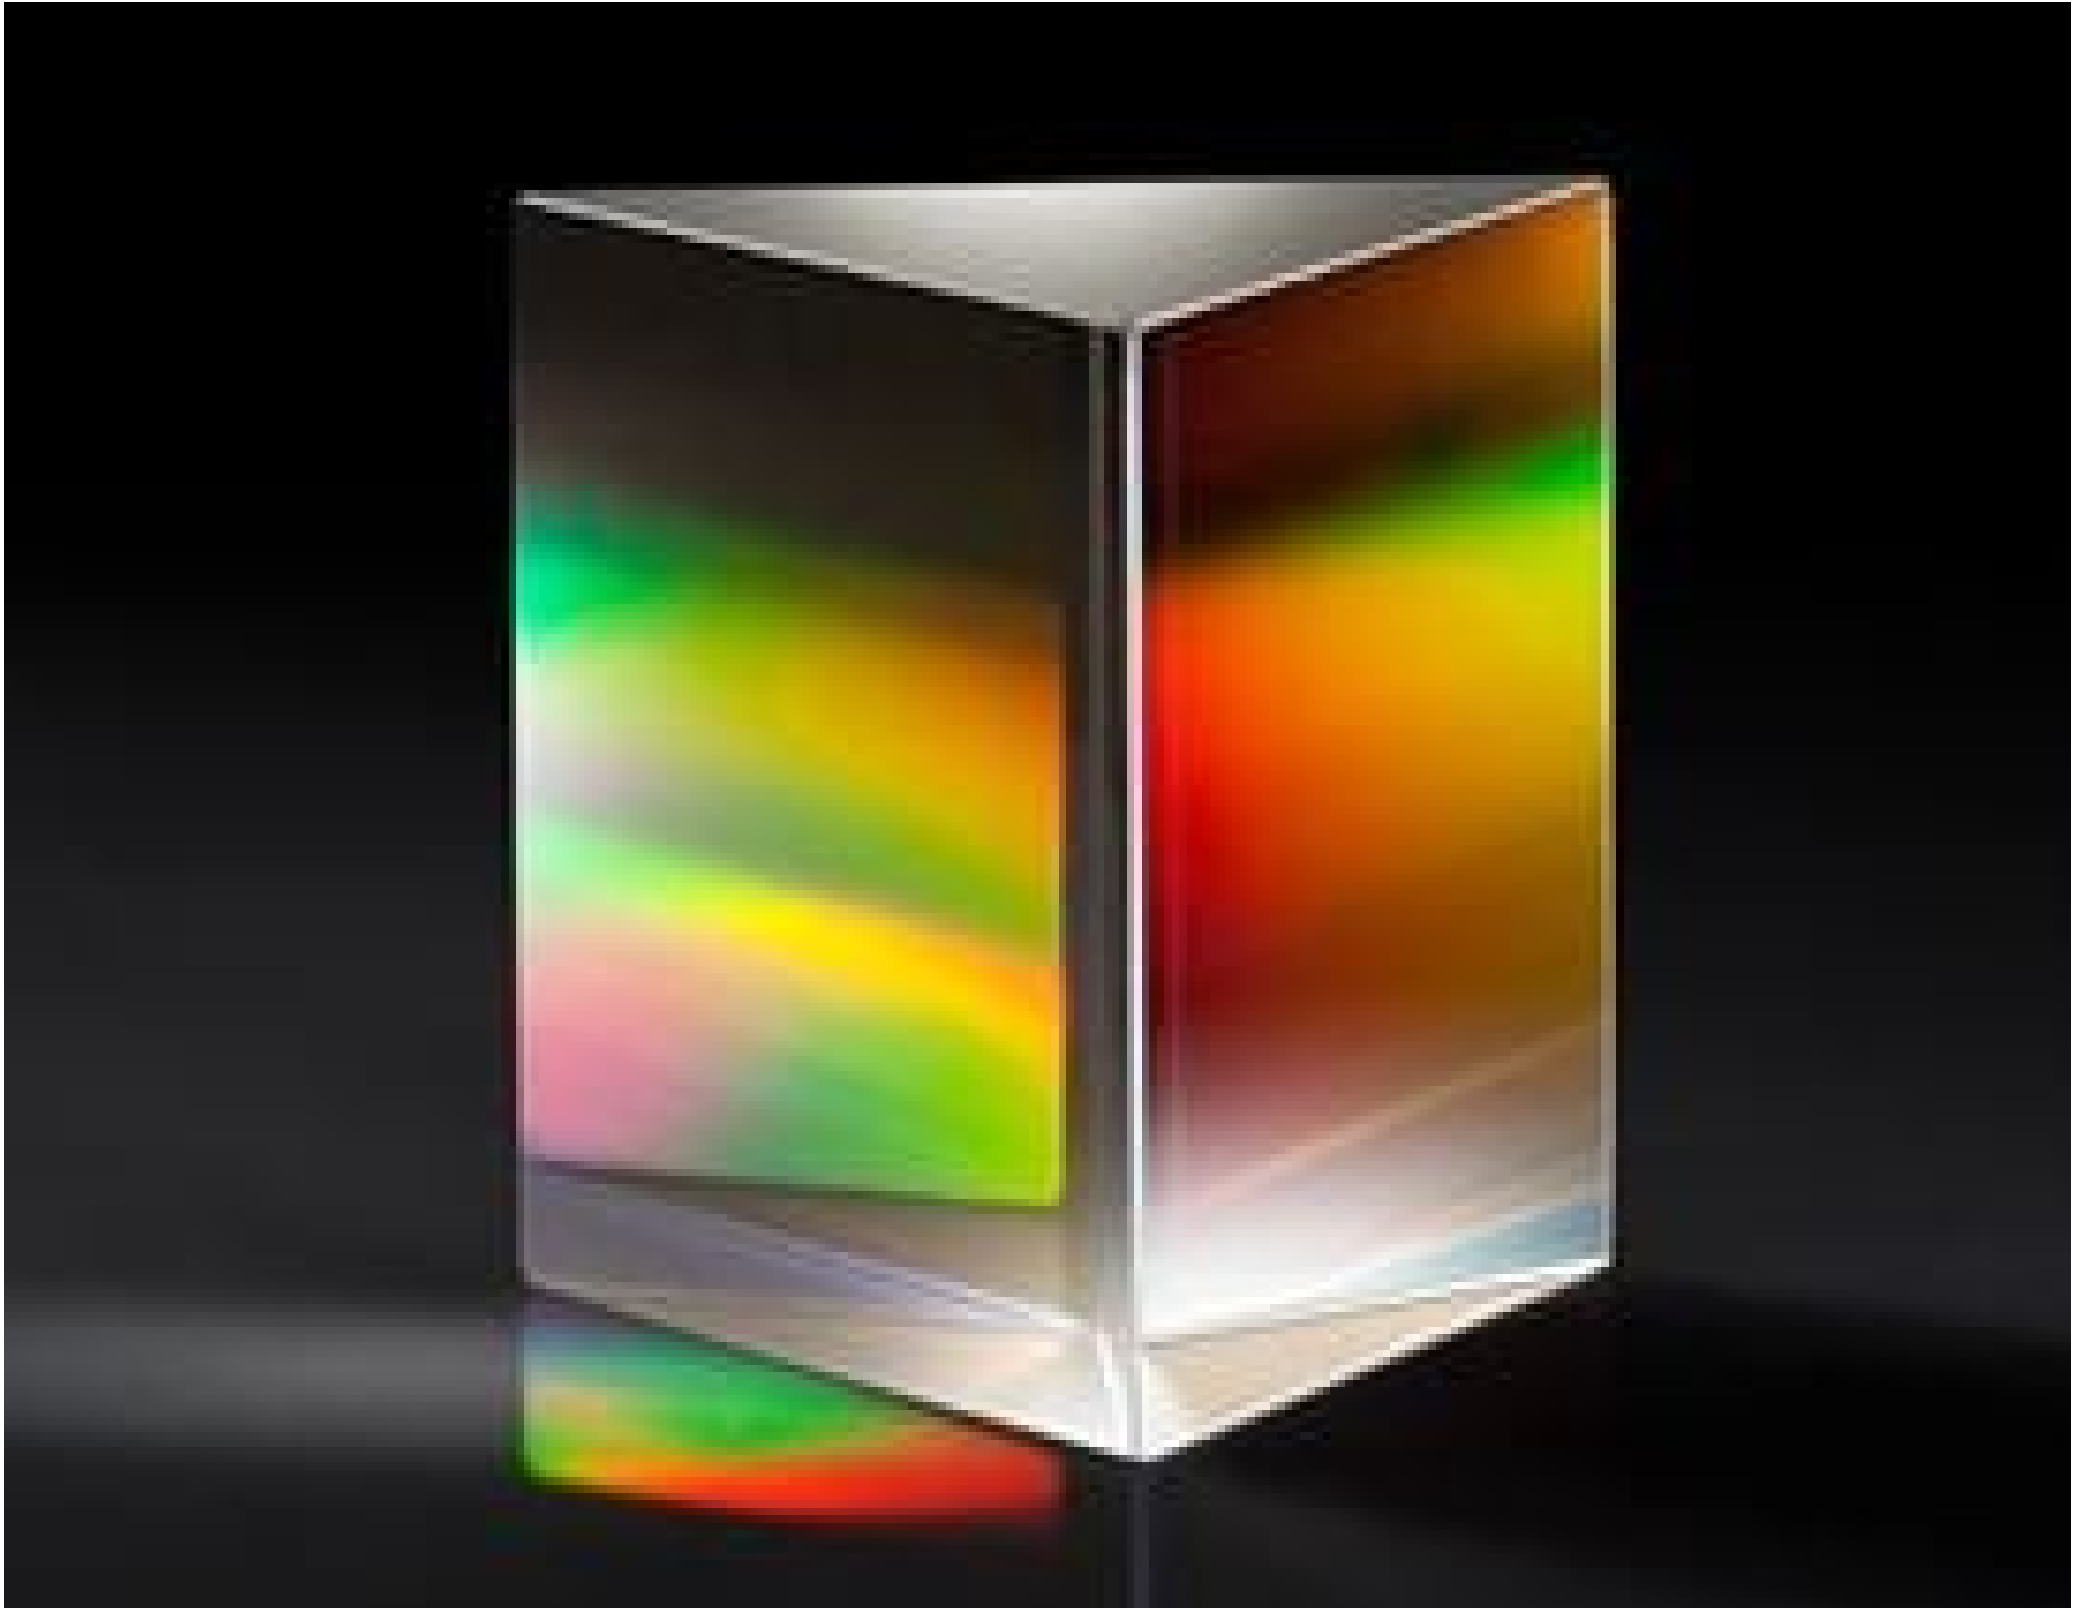

Stock #89-843 [CONTACT US](#)

- 1 + MRP ₹16,647

i Price inclusive of all taxes

ADD TO CART

Volume Pricing	
Qty 1-5	₹16,647 each
Qty 6-9	₹14,630 each
Qty 10+	₹13,015 each
Need More?	Request Quote

Product Downloads

General

Equilateral Prism **Type:**

Physical & Mechanical Properties

+0.0/-0.2 **Dimensional Tolerance (mm):**

<0.25mm x45° **Bevel:**

>80	Clear Aperture (%) :
25.40	Base Width (mm) :
25.4	Base Length (mm) :

Optical Properties

Uncoated	Coating:
LaKL21	Substrate: <input type="checkbox"/>
20-10	Surface Quality:
±3	Angle Tolerance (arcmin):
63.00	Apex Angle (°):
600.00	Group Velocity Dispersion (fs²/cm):
λ/6	Surface Flatness (P-V):
60 @ 800nm	Group Velocity Dispersion (fs²/mm):

Regulatory Compliance

Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 247:
Lithuania	Country of Origin:
Edmund Optics India Private Limited 267, Greystone Building, Second Floor, 6th Cross Rd, Binnamangala, Stage 1, Indiranagar, Bengaluru, Karnataka, India 560038 Phone: +91-80-6845 0000	Imported By:

Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:


- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).


Product Details

- Polished at Brewster's Angle to Minimize Reflection Loss
- Use Intracavity for Dispersion Compensation
- Use Extracavity to Manipulate Pulse Characteristics

Ultrafast Dispersion-Compensating Prisms are designed for the unique demands of ultrashort pulse laser systems and are available with a range of dispersive properties. When used intracavity, Ultrafast Dispersion-Compensating Prisms can compensate for the dispersion caused by light passing through the fixed cavity optics. When used extracavity, these prisms are used to manipulate pulse characteristics. The Group Velocity Dispersion (GVD) term determines how much a broadband pulse spectrally stretches or compresses and should be chosen depending on the laser source used or the application's dispersion requirements.

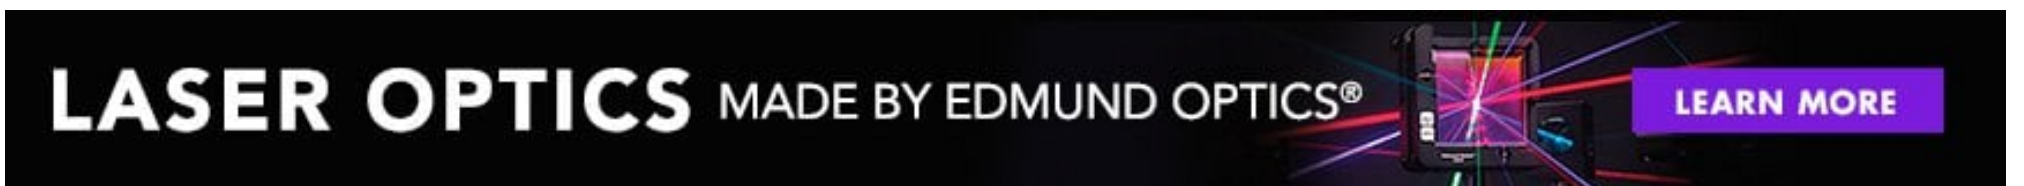

Technical Information

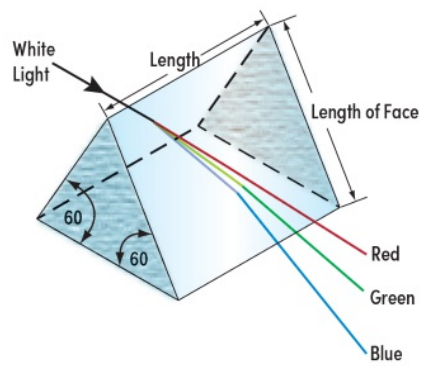

;